












LTX
LIGHTING SOLUTIONS

2025



WORKING CATALOGUE

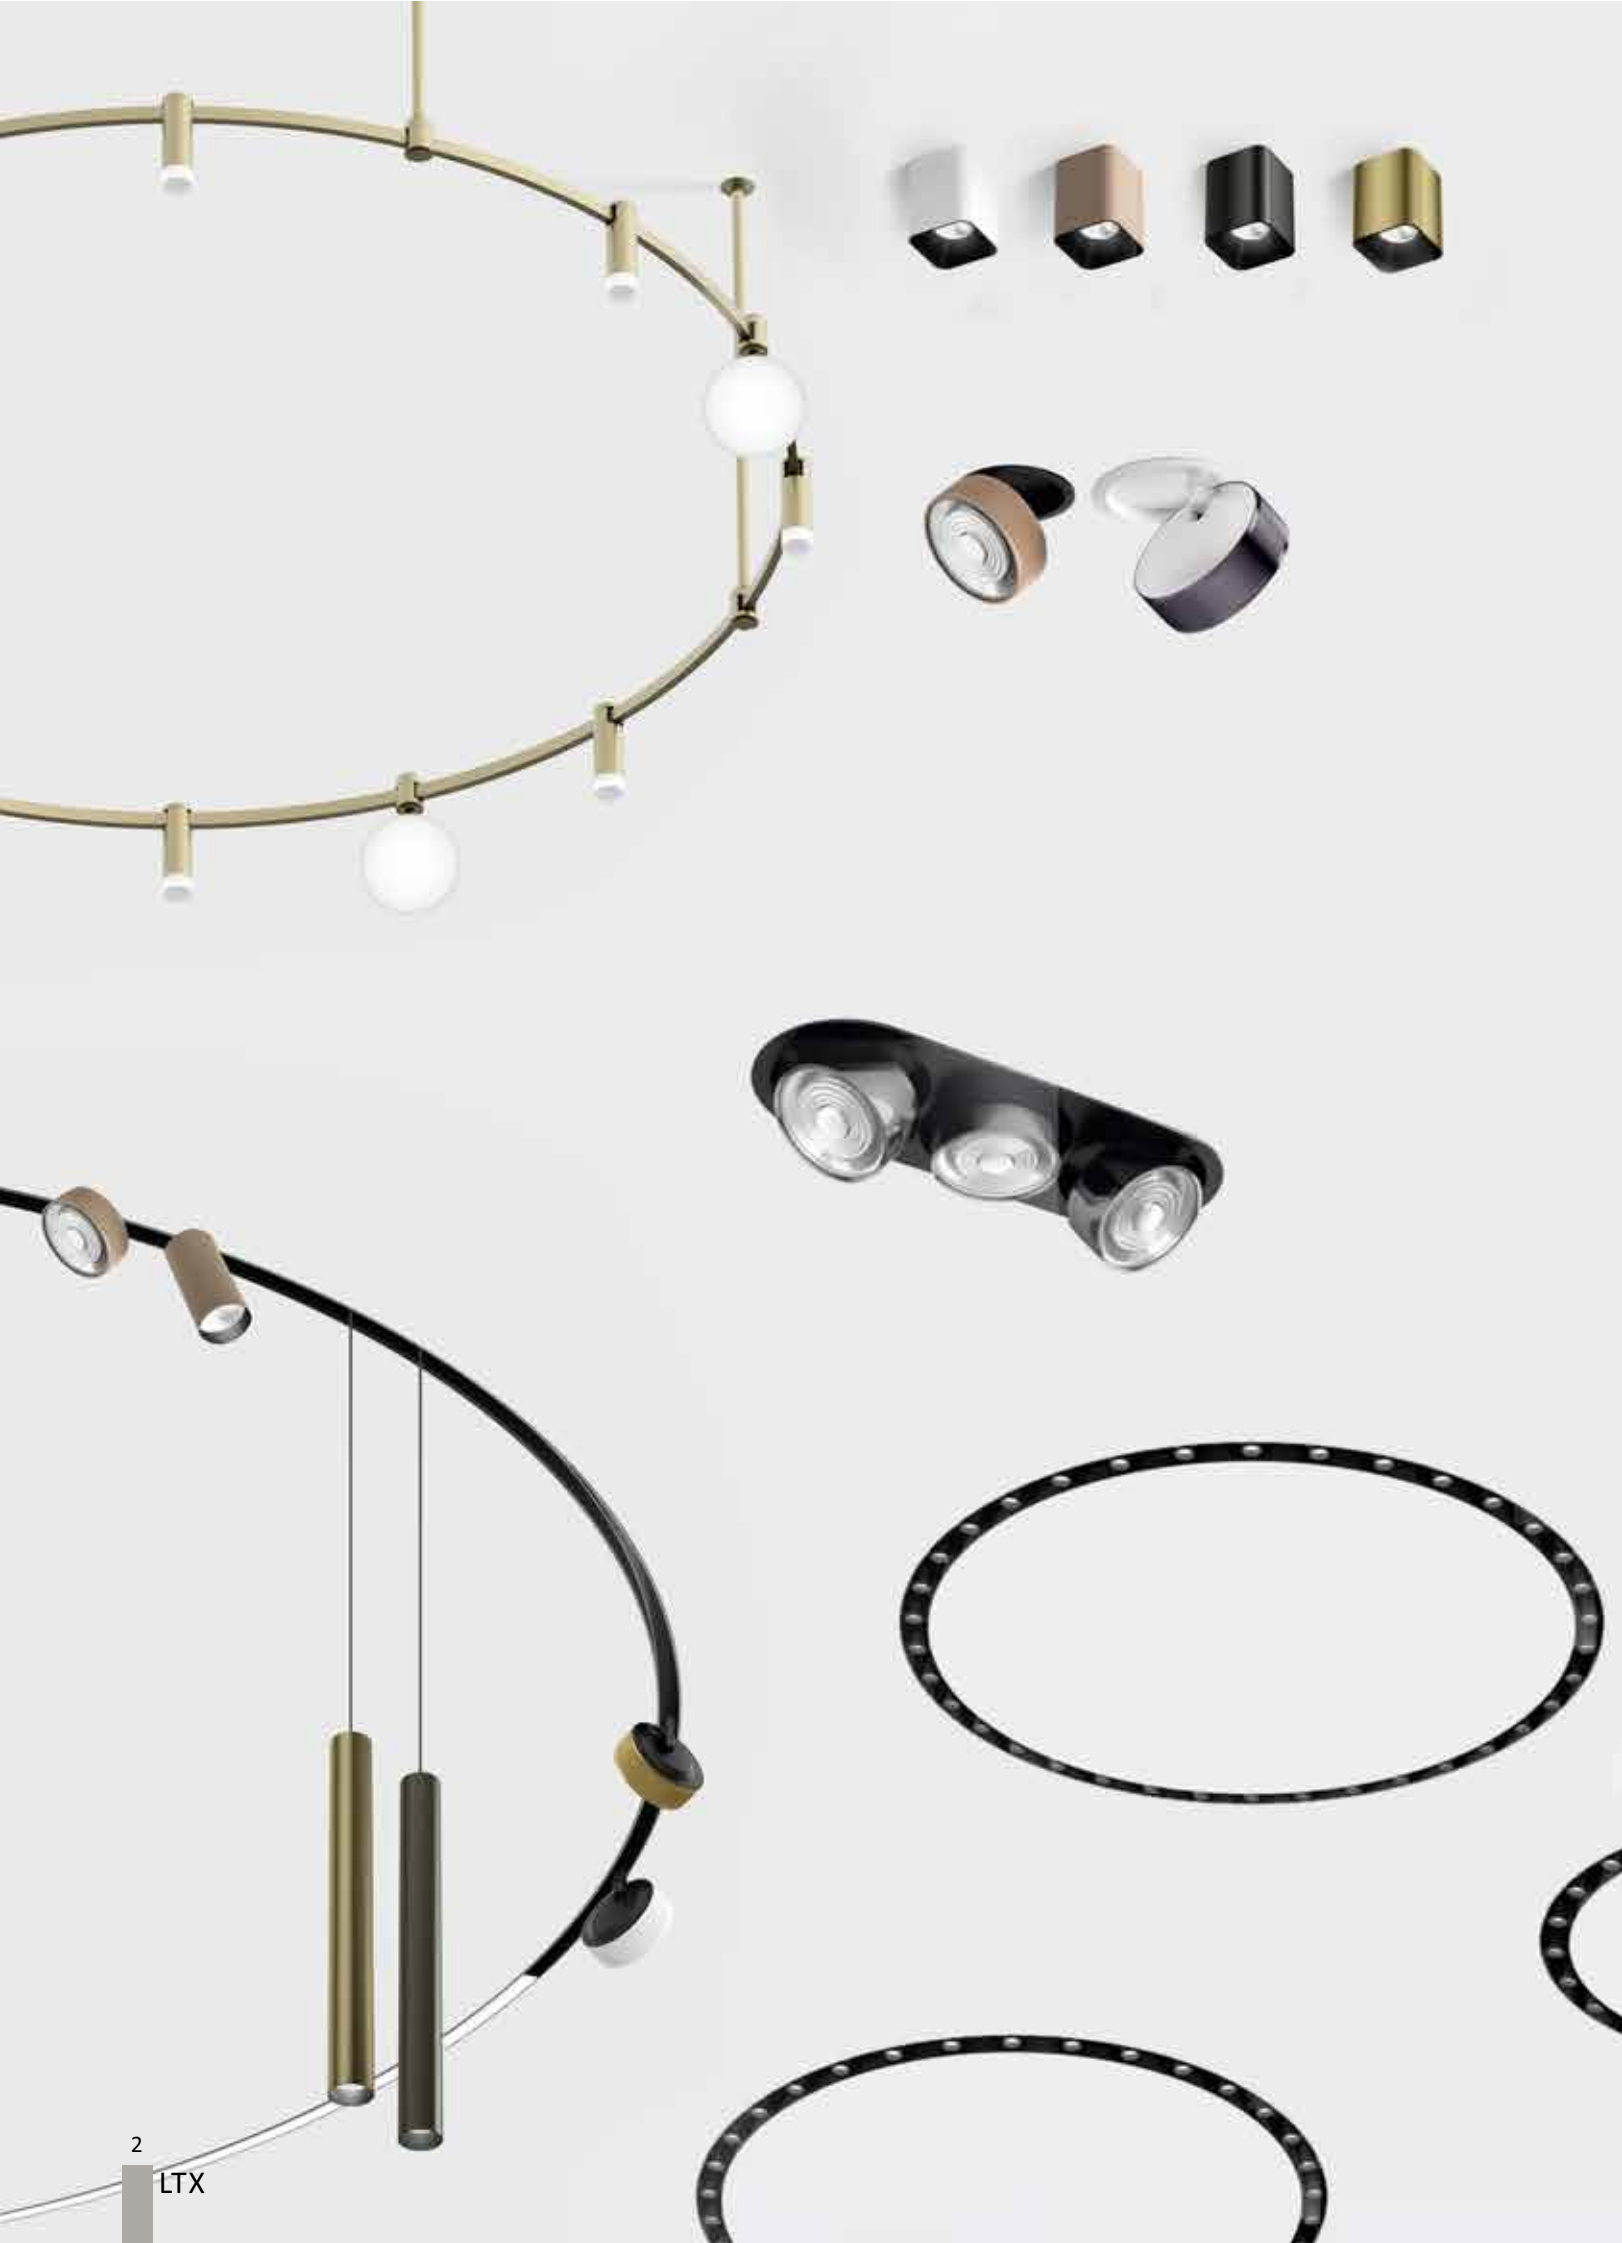

Ceiling recessed


			
RIO	RIO A	CELL	KARDAN
24	26	28	30
			
DROP IN	INVISIBLE SQUARE	INVISIBLE MINI R	INVISIBLE MINI OUT
32	34	36	38
			
TUB M TRIM	TUB M R	TUB M IN	TUB M OUT
40	42	44	46
			
TUB S OUT	SOL IN MINI	SOL IN	SOL IN MINI X2
48	52	54	56

Ceiling recessed

			
ORBITA	MICRO	NANO R TRIMLESS	NANO R
62	64	68	69
			
NANO S	NANO R WALL WASHER	NANO S WALL WASHER	NANO TUB S
72	74	75	76
			
VARIO LINEA	VARIO COMFORT	VARIO WALL WASHER	
79	82	84	

Ceiling surface

NEW




GHOST
86

NEW



GHOST
88




TUB M
90




TUB M SA
92



TUB L
96



TURBINE
98




SOL SURF MINI
100



SOL SURF
100

NEW



GLOW
104

NEW



PRISMA
106



ROLL
108



BRIGHT
110



FLAT R
112



FLAT S
113

Wall surface



BUTTON R
114



BUTTON SM
115



STRAIGHT
116



ROD
118




SLIMLINE
120



STRAW
124



STRAW
126



SFERA WALL S
128



SFERA WALL M
128



TO READ IN
130




TO READ
130

Wall recessed



IN WALL RING
132



IN WALL O
134



IN WALL S
134



STEP
136

Ceiling suspended



TUB XS P
140



MATCH S P
142



TUB S P
146




TUB S P ZOOM
152



TUB M P
154



TUB M P ZOOM
157



BALL
158



CONE P
161



SOL MINI P
164



SLIMLINE
168



STRAW
170



OFFICE
172



SNAKE
174



POINTER
176



POINTER FLOOR
178



MOON
180

Table&Floor

Track 42V



MINI_LINE 42
TRACK R
184



MINI_LINE 42
TRACK S
186

Tracklights 42V



MINI_LINE 42
LINEA
192



MINI_LINE 42
COMFORT
194



MINI_LINE 42
TUB XS
196



MINI_LINE 42
TUB S
198



MINI_LINE 42
TUB OUT
200




MINI_LINE 42
TUB OUT
200

Track 48V




IN_LINE
TRACK T
204



IN_LINE
TRACK R
206



IN_LINE
TRACK S
210



IN_LINE SHORT
TRACK S
220

Tracklights 48V




IN_LINE
LINEA
230



IN_LINE
COMFORT
232



IN_LINE WALL
WASHER
233



IN_LINE
TUB XS
234



IN_LINE
COMFORT B 205
236



IN_LINE
LINEA B 205
236



IN_LINE
INDIRECT
238

Tracklights 48V



IN_LINE
TUB XS
240



IN_LINE
TUB S
242



IN_LINE
TUB S X2
243



IN_LINE
ZOOM
244



IN_LINE
TUB M NB
245



IN_LINE
GALLERY
246



IN_LINE
TUB M A 90
248




IN_LINE
TUB M A 140
250




IN_LINE
SOL MINI
252



IN_LINE
SOL
254



IN_LINE
WIN
256



IN_LINE
SFERA
256


Tracklights 48V




IN_LINE ART
258



IN_LINE STICKS
258



IN_LINE BALL M
260



IN_LINE BALL L
260



IN_LINE
TUB XS P
262



IN_LINE
MATCH
264



IN_LINE
TUB S P
266



IN_LINE
TUB S P ZOOM
269



IN_LINE
TUB M P
270



IN_LINE
TUB M P ZOOM
271



IN_LINE
CONE
271



IN_LINE
DISK
272



IN_LINE
SOL MINI P
274

Tracklights 48V



IN_LINE
LINEA
278



IN_LINE
COMFORT
278



IN_LINE
LINEA B 205
280



IN_LINE
COMFORT B 205
280



IN_LINE
TUB S A 60
282




IN_LINE
TUB M A 90
282



IN_LINE
TUB M A 140
283



IN_LINE
SOL
284



IN_LINE
TUB S P TW
288

Track 48V



IN_RING TRACK R
294

IN_RING TRACK
296

Tracklights 48V




IN_RING LINEA
300

IN_RING COMFORT
303

IN_RING TUB S A 60
304

IN_RING TUB M A 90
306

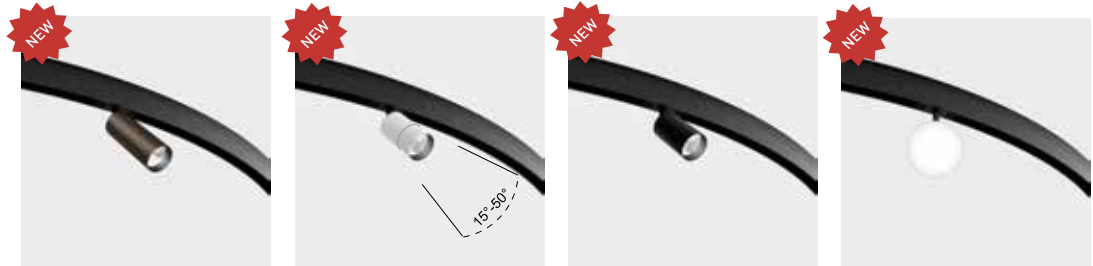

IN_RING TUB M A 140
307

IN_RING ZOOM
308

IN_RING TUB M NB
309

IN_RING SFERA
310



IN_RING SOL MINI
312

IN_RING TUB S P
314


Track 48V



MICRO_LINE TRACK R
320

MICRO_LINE TRACK S
322

Tracklights 48V

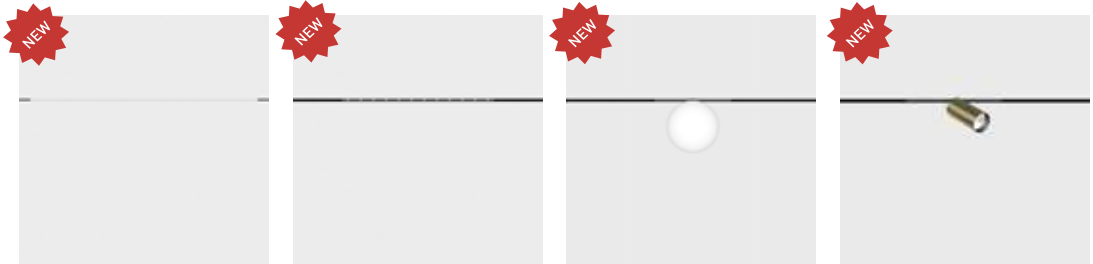


MICRO_LINE LINEA
330

MICRO_LINE COMFORT
330

MICRO_LINE SFERA
332

MICRO_LINE TUB S A 60
334

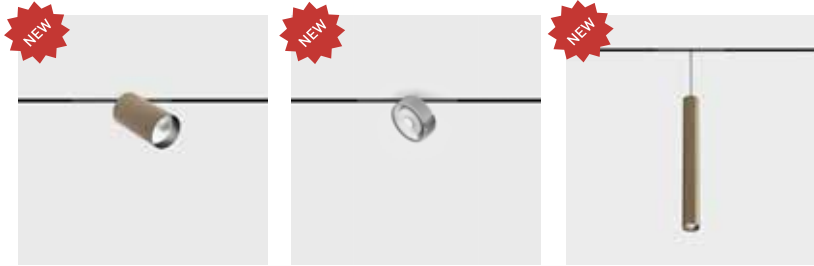

MICRO_LINE TUB M A 90
335


MICRO_LINE SOL MINI
338

MICRO_LINE TUB S P
340

Track 48V




Tracklights 48V

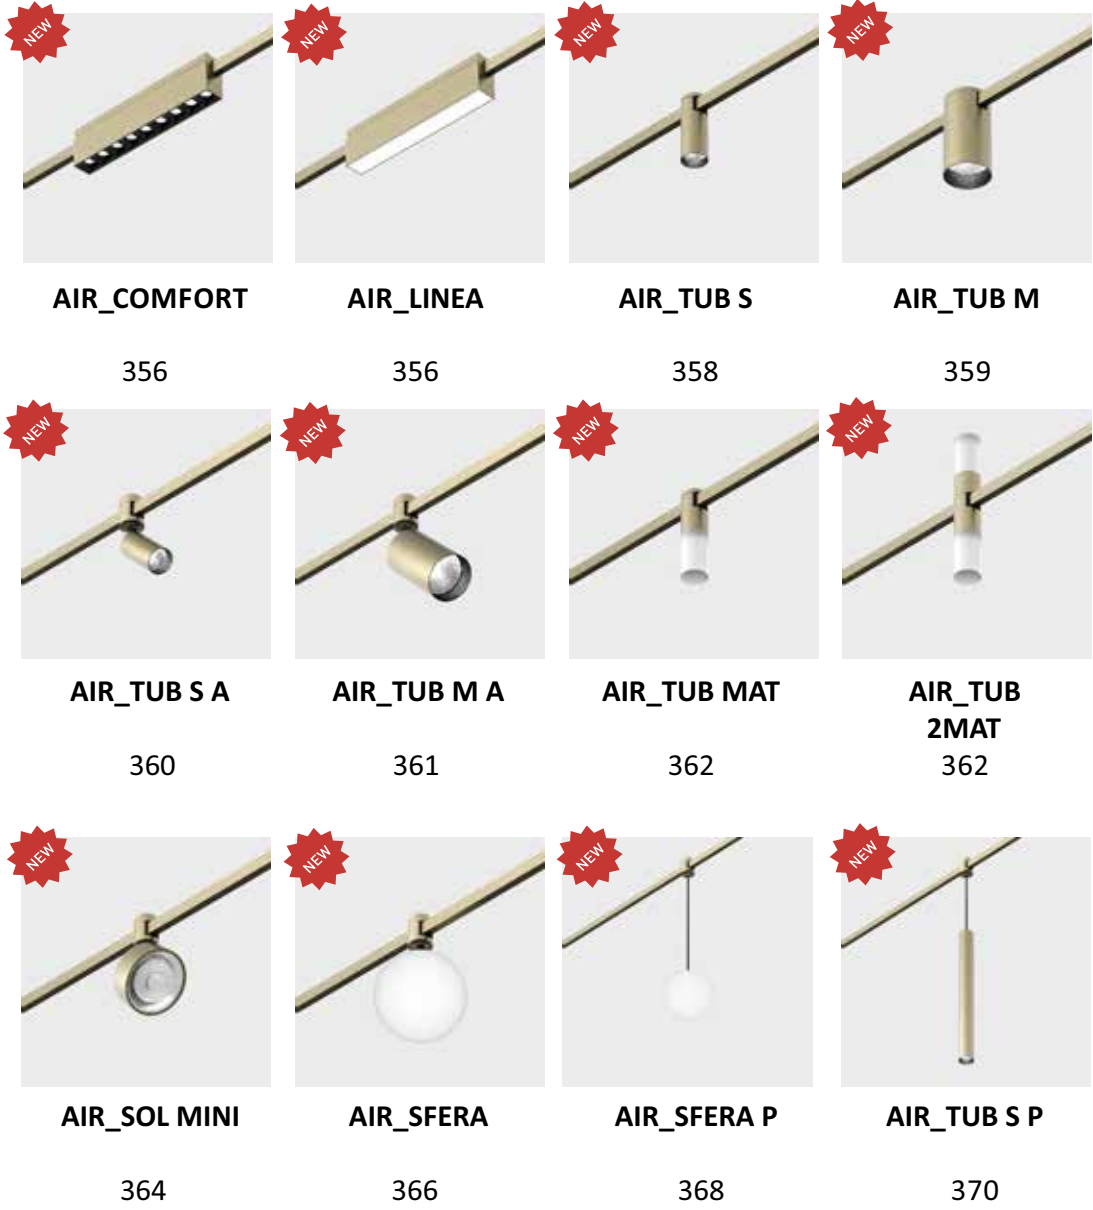

Track 24V



Tracklights 24V

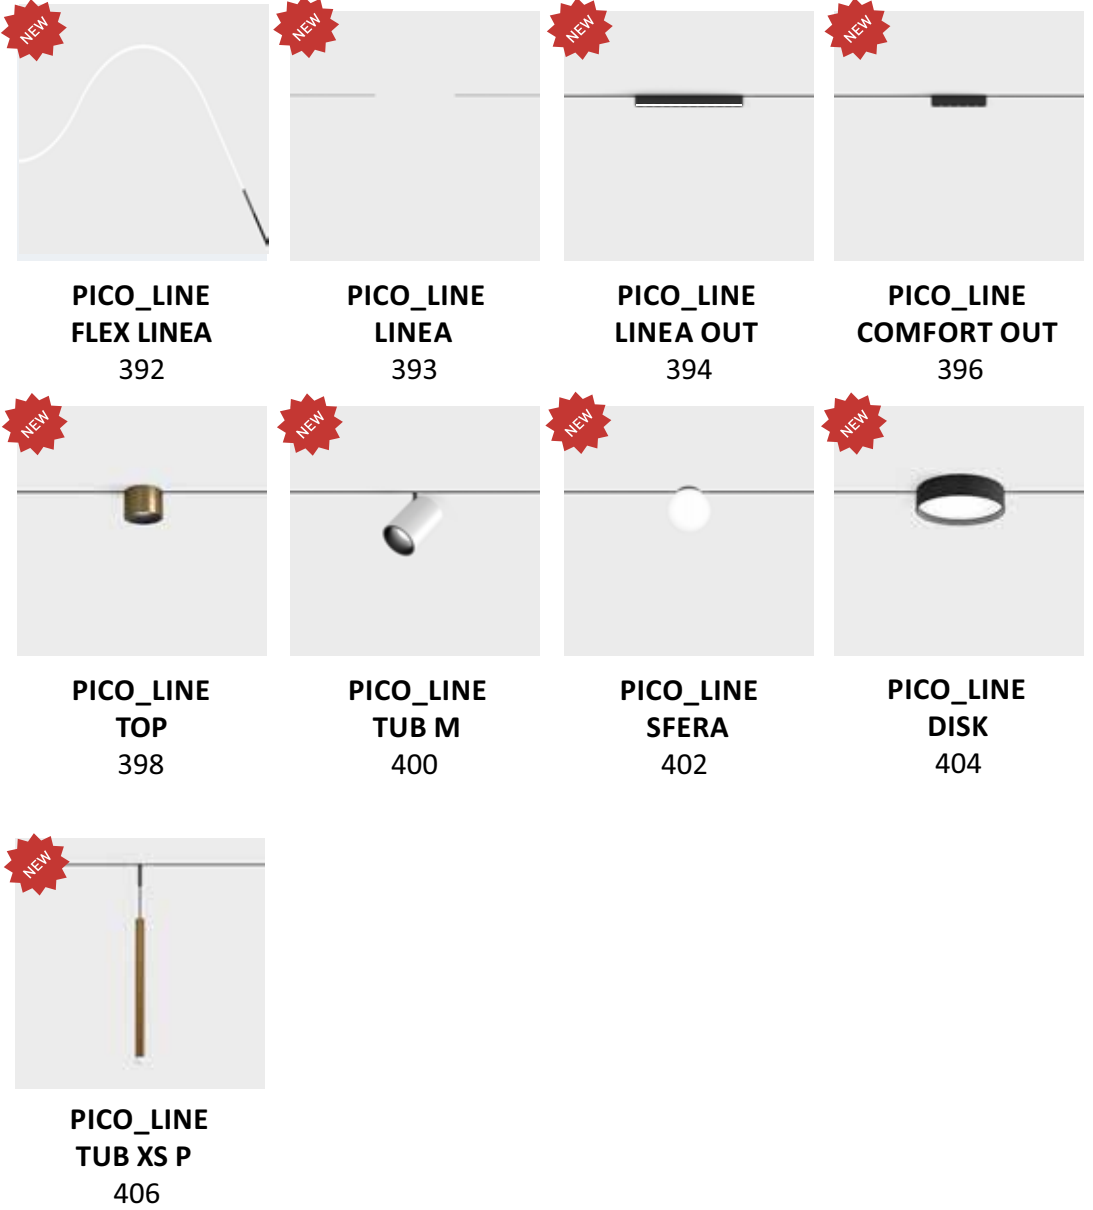

Ceiling



RAIN IP
410

URBAN
412

URBAN
412



URBAN
413

URBAN
413

BIM70 S
414




BARREL76 S
414

KASK
415

BUBBLE
416

Wall surface

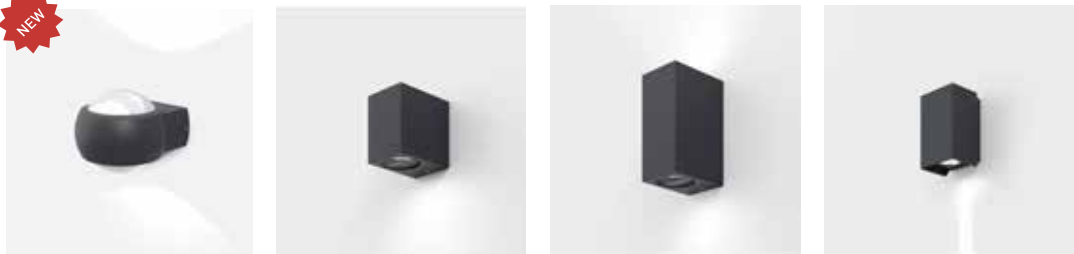


BUBBLE
416

GRAPH1
418

GRAPH2
418

BRICK 1
420

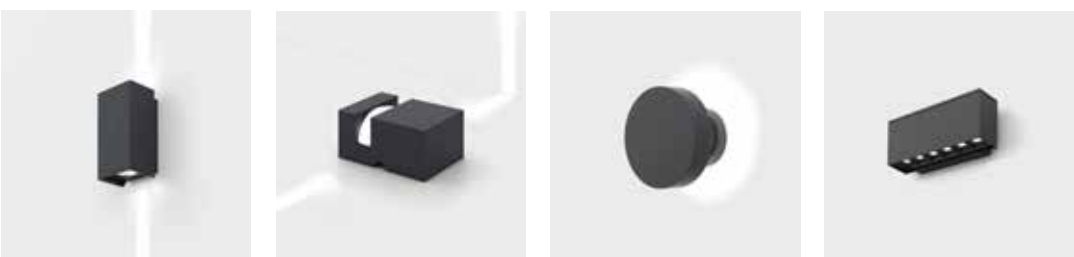

BRICK 2
420

WIN IP
422

BUTTON IP
424

ON WALL
424


Wall surface



ON WALL IP
426

BEVEL
426

Wall recessed

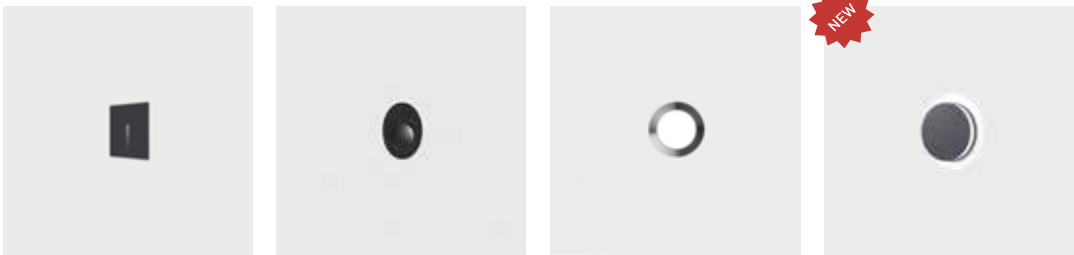

IN WALL IP
428

IN WALL IP
430

IN WALL DOT
432

HALO
433

Spot light



VISO50
434



VISO72
434



VISO55
436



VISO82
437



VISO140
438


In ground



UPP28
440



UPP28
440



PATH LIGHT
441



UPP55
442



UPP55 WW
442



UPP77
443



UPP77 WW
443



UPP 220V
443

Bollards



BARD1
444



BARD2
446



BARD4
446



BARD3
447



BARD5
447




BARD6
448




YARD 2
450



YARD
452



YARD 1
454



FIREFLY
456

LED Strip



120 LED/m
3000K/4000K
460



120 LED/m
2300K
464



128 LED/m
3000K
466



192 LED/m
3000K/4000K
468



COF LED
3000K/4000K
470



120 LED/m
RGB
472



168 LED/m
RGB
472



60 LED/m
RGBW
474




140 LED/m
TUNABLE WHITE
476



NEON LED STRIP
3000K/4000K
478

Profile



PROFILE
COUNTUR
480



PROFILE
CENTRAL 1
482



PROFILE
CENTRAL 2
482



PROFILE
COUNTUR TRIM
483



PROFILE
MINI TRIM
483



PROFILE
IN
484



PROFILE
OUT
484



PROFILE
IN SURF
487



PROFILE
FLOOR IN
488




PROFILE
FLOOR IN
488



PROFILE
FLOOR
489

RIO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6480.10.930.XX.***	9	3000	>90	250	924
01.6480.10.940.XX.***	9	4000	>90	250	924

LEDCE

IP44

INCL

Ø65

80


50°

MATERIAL | AL

i

» 497

RIO F1



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6480F1.10.930.XX.***	9	3000	>90	250	924
01.6480F1.10.940.XX.***	9	4000	>90	250	924

LEDCE

IP44

INCL

Ø65

80

50°


MATERIAL | AL

i

» 497


Color	Frame	Body
XX		
BK	BK	BK
WH	WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

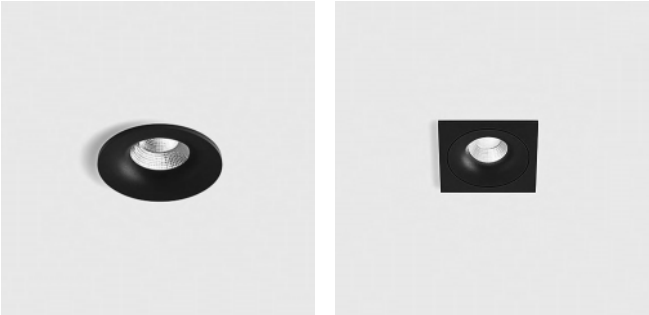

01.6480.10.930.BK01.6480F1.10.930.BK

RIO F2



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6480F2.20.930.XX.***	2 x 9	3000	>90	250	2 x 924
01.6480F2.20.940.XX.***	2 x 9	4000	>90	250	2 x 924

LEDCE

IP44

INCL

155 x 65

80


50°

MATERIAL | AL

i

» 497

RIO F3



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6480F3.30.930.XX.***	3 x 9	3000	>90	250	3 x 924
01.6480F3.30.940.XX.***	3 x 9	4000	>90	250	3 x 924

LEDCE

IP44

INCL

250 x 65

80

50°

MATERIAL | AL

i

» 497


Color	Frame	Body
XX		
BK	BK	BK
WH	WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.6480F2.20.930.BK01.6480F3.30.930.BK

RIO A



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6490.10.930.XX.***	9	3000	>90	250	924
01.6490.10.940.XX.***	9	4000	>90	250	924

LED

CE

IP20

INCL

Ø98

80

50°

Tilt

Rotate


MATERIAL |

AL

i

» 497

RIO A F1



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6490F1.10.930.XX.***	9	3000	>90	250	924
01.6490F1.10.940.XX.***	9	4000	>90	250	924

LED

CE

IP20

INCL

Ø98

80

50°

Tilt

Rotate

MATERIAL |

AL

i

» 497

Color	Frame	Body
XX		
BK	BK BK	
WH	WH WH	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




01.6490.10.930.BK



01.6490F1.10.930.BK

RIO A F2



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6490F2.20.930.XX.***	2 x 9	3000	>90	250	2 x 924
01.6490F2.20.940.XX.***	2 x 9	4000	>90	250	2 x 924

LED

CE

IP20

INCL

214 x 98

80

50°

Tilt

Rotate

MATERIAL |

AL

i

» 497

Color	Frame	Body
XX		
BK	BK BK	
WH	WH WH	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




01.6490F2.20.930.WH



01.6490F2.20.930.BK

CELL




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2010.10.930.XX.***	9	3000	>90	250	924
01.2010.10.940.XX.***	9	4000	>90	250	924



MATERIAL | **AL** » 497

CELL 2



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.20F2.20.930.XX.***	2 x 9	3000	>90	250	2 x 924
01.20F2.20.940.XX.***	2 x 9	4000	>90	250	2 x 924



MATERIAL | **AL** » 497

Color	Frame	Body
XX		
BK	BK	WH
WH	WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




01.2010.10.930.BK



01.20F2.20.930.BK

OTHER COLORS TEMPERATURE ON REQUEST

CELL 3



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.20F3.30.930.XX.***	3 x 9	3000	>90	250	3 x 924
01.20F3.30.940.XX.***	3 x 9	4000	>90	250	3 x 924



MATERIAL | **AL** » 497

Color	Frame	Body
XX		
BK	BK	WH
WH	WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




01.20F3.30.930.WH



01.20F3.30.930.BK

OTHER COLORS TEMPERATURE ON REQUEST

KARDAN 1




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6100.13.930.XX.***	9	3000	>90	250	924
01.6100.13.940.XX.***	9	4000	>90	250	924



MATERIAL | AL » 497

KARDAN 2



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.6110.26.930.XX.***	2 x 9	3000	>90	250	2 x 924
01.6110.26.940.XX.***	2 x 9	4000	>90	250	2 x 924



MATERIAL | AL » 497

Color	Frame	Body
XX		
BK	BK	BK
WH	BK	WH
WHW	WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.6110.26.930.WHW



01.6110.26.930.WH




01.6110.26.930.BK



Ceiling recessed

DROP IN



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.7754.13.930.GL.***	13	3000	>90	350	1041
01.7754.13.940.GL.***	13	4000	>90	350	1041



MATERIAL | AL GL


» 497

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

Ceiling recessed



INVISIBLE SQUARE



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2212.9.930.XX.***	9	3000	>90	250	924
01.2212.9.940.XX.***	9	4000	>90	250	924



MATERIAL | AL

i » 497

Color

XX

BK

BK

WH

WH


Options

DALI


DIM DALI

PC



DIM PHASE CUT



01.2212.9.930.WH




01.2212.9.930.BK

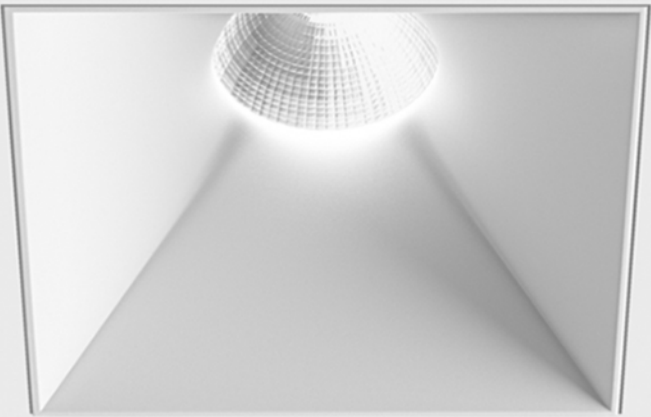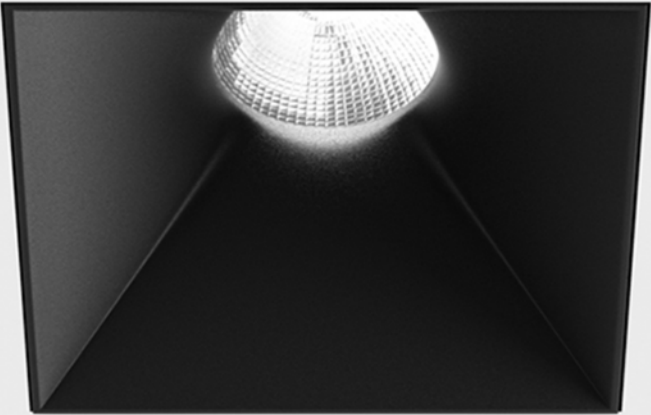

Ceiling recessed


INVISIBLE MINI R



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2200.7.930.XX.***	6,3	3000	>90	350	640
01.2200.7.940.XX.***	6,3	4000	>90	350	640

OPTIONAL ACCESSORIES

	TRIMLESS TOOL	01.A2200.TL
--	---------------	-------------



MATERIAL | AL

» 497


Color

XX

BK	BK	
BR	BR	
DB	DB	
MN	MN	
WH	WH	

*** Options

	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.2200.7.930.BR



01.2200.7.930.DB




01.2200.7.930.MN

Ceiling recessed




Ceiling recessed

INVISIBLE MINI OUT



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2203.7.930.XX.***	6,3	3000	>90	350	640
01.2203.7.940.XX.***	6,3	4000	>90	350	640




MATERIAL | AL

» 497

Color XX	Body	Shield
BK	BK	BK
BR	BR	BR
DB	DB	DB
MN	MN	MN
WH	WH	WH
BK/BR	BK	BR
BK/DB	BK	DB
BK/MN	BK	MN
BK/WH	BK	WH
BR/BK	BR	BK
BR/WH	BR	WH
DB/BK	DB	BK
DB/WH	DB	WH
MN/BK	MN	BK
MN/WH	MN	WH
WH/BK	WH	BK
WH/BR	WH	BR
WH/DB	WH	DB
WH/MN	WH	MN

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

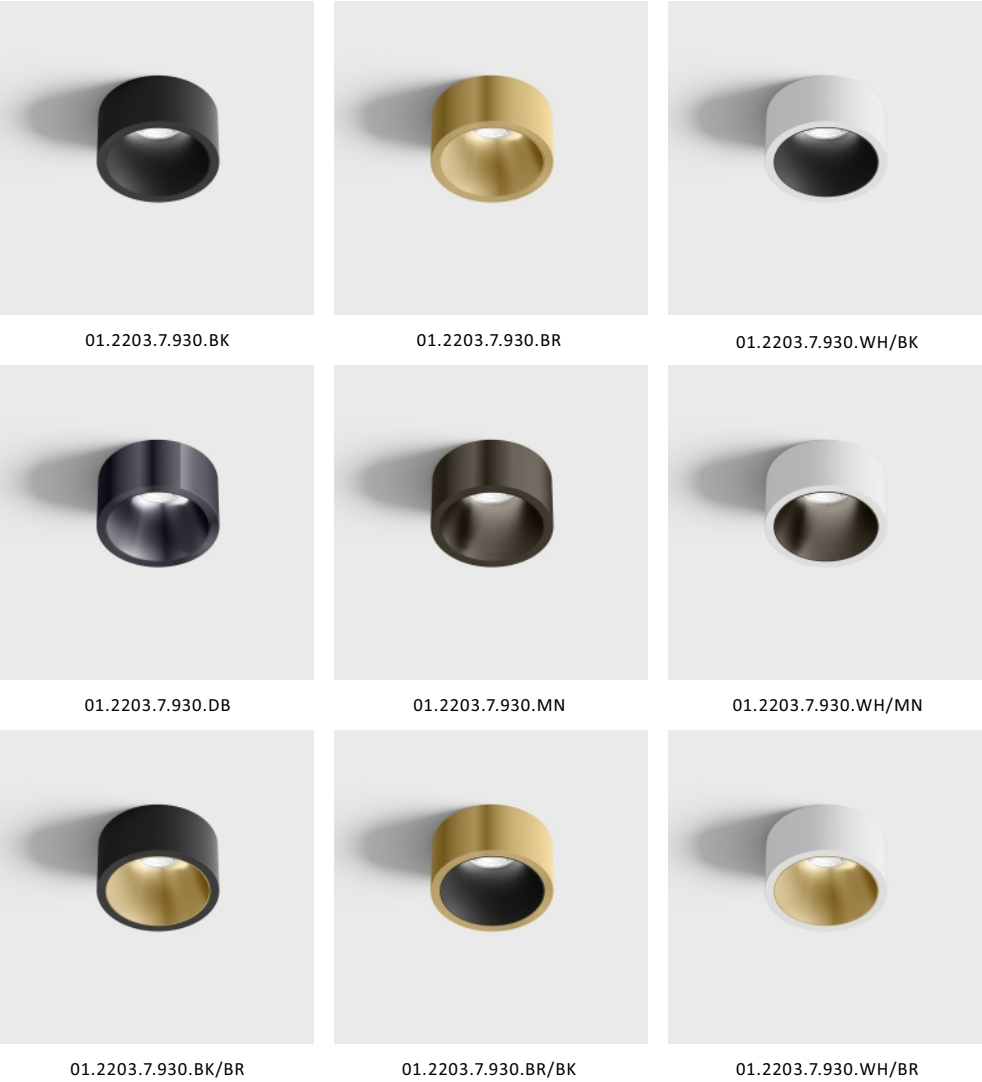


Ceiling recessed




Ceiling recessed

TUB M TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0597.11.930.XX.***	11	3000	>90	300	1210
01.0597.11.940.XX.***	11	4000	>90	300	1210


OPTIONAL ACCESSORIES



MATERIAL | AL

» 497

TUB M TRIM



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0599.11.930.XX.***	11	3000	>90	300	1210
01.0599.11.940.XX.***	11	4000	>90	300	1210



MATERIAL | AL

» 497

Color

XX

BK

BK

WH

WH


Options

DALI

DIM DALI

PC

DIM PHASE CUT



01.0597.11.930.BK



01.0599.11.930.BK

ACCESSORIES


Honeycomb	06.A05HC
Elips diffuser	06.A05ELPS
Foggy diffuser	06.A05SFT
Lens 15°	06.A05LS15
Lens 30°	06.A05LS30

» 492

Ceiling recessed




TUB M R



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0598.11.930.XX.***	11	3000	>90	300	1210
01.0598.11.940.XX.***	11	4000	>90	300	1210

OPTIONAL ACCESSORIES

	TRIMLESS TOOL	01.A0598.TL
--	---------------	-------------




MATERIAL | AL

» 497

Color	Body	Shield
XX		
BK	BK	BK
BK/BR	BK	BR
BK/MN	BK	MN
WH	WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.0598.11.930.BK/BR





01.0598.11.930.BK/MN

ACCESSORIES


	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 492

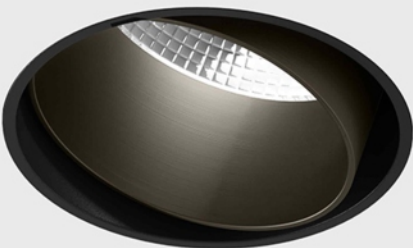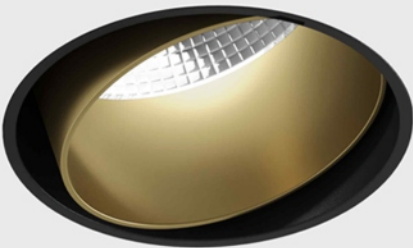

Ceiling recessed

TUB M IN




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0590.9.930.XX.***	9	3000	>90	250	690
01.0590.9.940.XX.***	9	4000	>90	250	690



MATERIAL | AL » 497

TUB M INT



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0592.9.930.XX.***	9	3000	>90	250	690
01.0592.9.940.XX.***	9	4000	>90	250	690



MATERIAL | AL » 497

Color	XX
BK	☒
WH	☐

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.0592.9.930.WH+06.A05SH.BR



01.0592.9.930.BK + 06.A05SH.BR



01.0592.9.930.WH+06.A05SH.CP



01.0592.9.930.BK+06.A05SH.CP

ACCESSORIES

Shield TUB M Copper	06.A05SH.CP
Shield TUB M Brass	06.A05SH.BR
Shield L TUB M Copper	06.A05SHL.CP
Shield L TUB M Brass	06.A05SHL.BR
Wall washer	06.A05WW
Snoot, black	06.A05NB
Foggy cover	06.A05FG
Honeycomb	06.A05HC
Elips diffuser	06.A05ELPS
Foggy diffuser	06.A05SFT
Lens 15°	06.A05LS15
Lens 30°	06.A05LS30

» 492


Ceiling recessed

ARCHITECTURAL BURO . PLATFORMA BURO

TUB M OUT TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0594.9.930.XX.***	12	3000	>90	300	1210
01.0594.9.940.XX.***	12	4000	>90	300	1210




MATERIAL | AL

» 497

TUB M OUT



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0593.9.930.XX.***	12	3000	>90	300	1210
01.0593.9.940.XX.***	12	4000	>90	300	1210



MATERIAL | AL

» 497

Color	Frame	Body
XX		
BK	BK ■ BK ■	
BR	BR ■ BR ■	
WH	WH □ WH □	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.0593.9.930.WH



01.0593.9.930.BK




01.0593.9.930.BR

TUB M OUT NB TRIMLESS



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
01.0595.9.930.XX	9	3000	>90	220-240	750
01.0595.9.940.XX	9	4000	>90	220-240	750




MATERIAL | AL

» 497

TUB M OUT NB



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
01.0596.9.930.XX	9	3000	>90	220-240	750
01.0596.9.940.XX	9	4000	>90	220-240	750



MATERIAL | AL

» 497

Color	Frame	Body
XX		
BK	BK ■ BK ■	
WH	WH □ WH □	




01.0596.9.930.WH



01.0596.9.930.BK

TUB S OUT



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0303.4.930.XX.***	4	3000	>90	350	340
01.0303.4.940.XX.***	4	4000	>90	350	340

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL


ⓘ » 497

Color	Frame	Body
XX		
BK	BK	BK
BK/BR	BK	BR
WH	WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.0303.4.930.WH



01.0303.4.930.BK





01.0303.4.930.BK/BR



Ceiling recessed

SOL IN SERIES

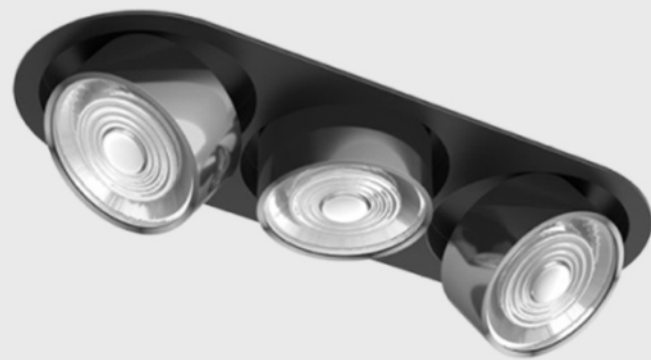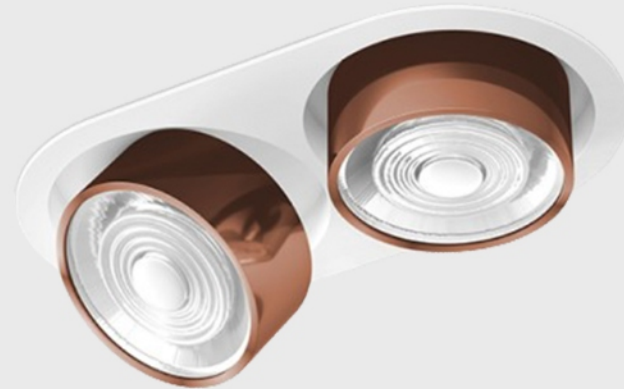


Ceiling recessed



Ceiling recessed

SOL IN MINI



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.7526.7.930.XX.***	7	3000	>90	350	624
01.7526.7.940.XX.***	7	4000	>90	350	624




MATERIAL | AL

i » 497


Color XX	Body	M RING
BK	BK	BK
BK/BR	BK	BR
BK/CP	BK	CP
BK/CR	BK	CR
BK/DB	BK	DB
BK/WH	BK	WH
WH	WH	WH
WH/BK	WH	BK
WH/BR	WH	BR
WH/CP	WH	CP
WH/CR	WH	CR
WH/DB	WH	DB

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

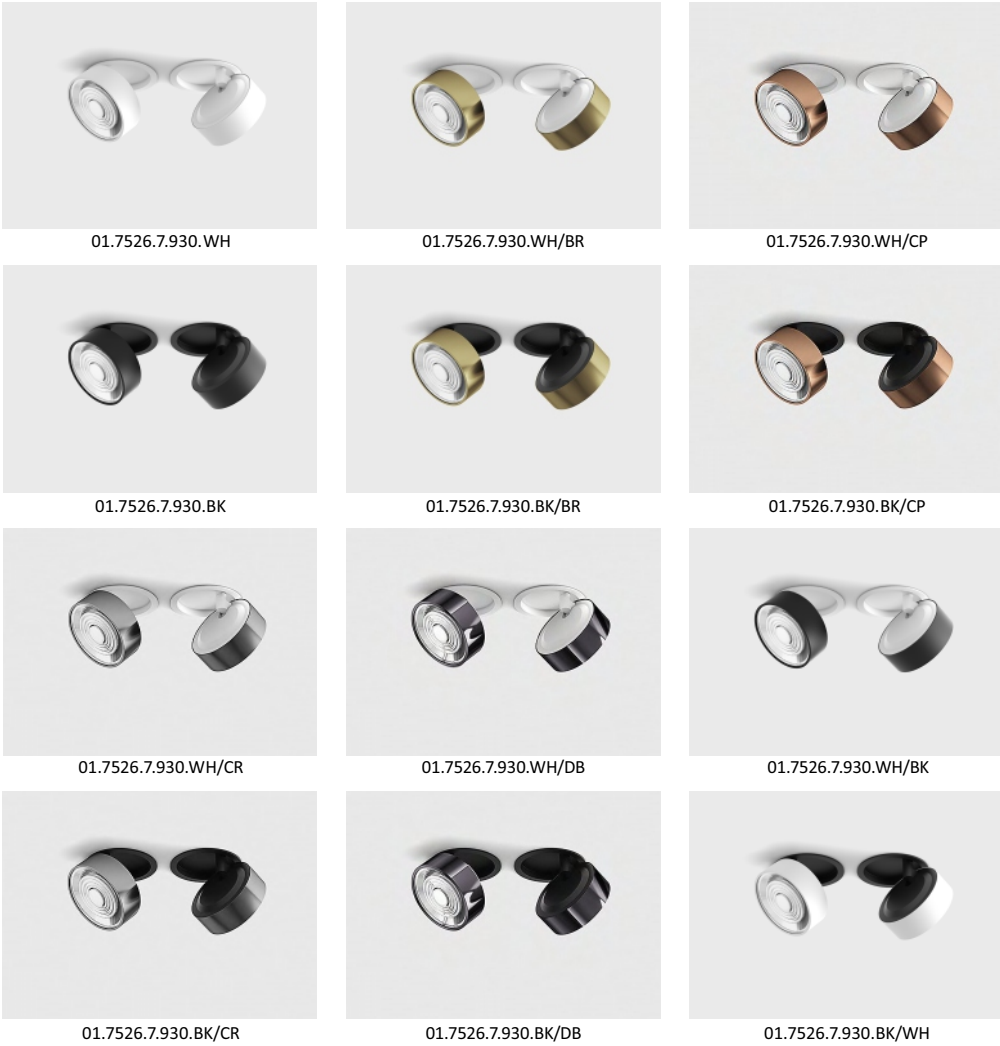

Ceiling recessed

SOL IN MINI



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.7526.7.930.XX.***	7	3000	>90	350	624
01.7526.7.940.XX.***	7	4000	>90	350	624




MATERIAL | AL


i » 497

Color XX	Body	M RING GRAIN
BK/BKG	BK	BKG
BK/BRG	BK	BRG
BK/BZG	BK	BZG
BK/CFG	BK	CFG
BK/CPG	BK	CPG
BK/CRG	BK	CRG
BK/DBG	BK	DBG
BK/DBG	BK	DBG
BK/SBG	BK	SBG
BK/WHG	BK	WHG
WH/BKG	WH	BKG
WH/BRG	WH	BRG
WH/BZG	WH	BZG
WH/CFG	WH	CFG
WH/CPG	WH	CPG
WH/CRG	WH	CRG
WH/DBG	WH	DBG
WH/SBG	WH	SBG
WH/WHG	WH	WHG

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

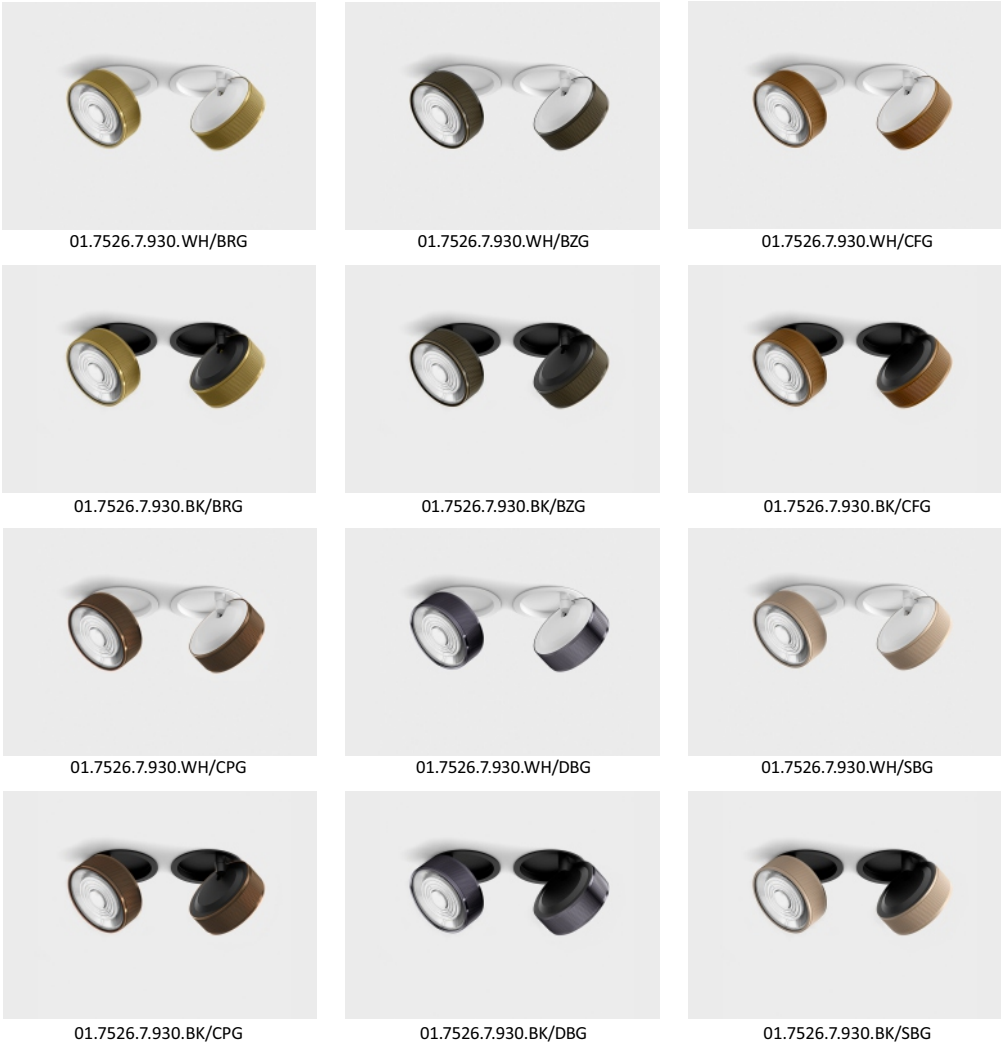

SOL IN MINI X3



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.7523.21.930.XX.***	3x7	3000	>90	200	3x624
01.7523.21.940.XX.***	3x7	4000	>90	200	3x624




MATERIAL |  AL


 » 497

Color	Frame	M RING
XX		
BK	BK 	BK 
BK/BR	BK 	BR 
BK/CP	BK 	CP 
BK/CR	BK 	CR 
BK/DB	BK 	DB 
BK/WH	BK 	WH 
WH	WH 	WH 
WH/BK	WH 	BK 
WH/BR	WH 	BR 
WH/CP	WH 	CP 
WH/CR	WH 	CR 
WH/DB	WH 	DB 

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

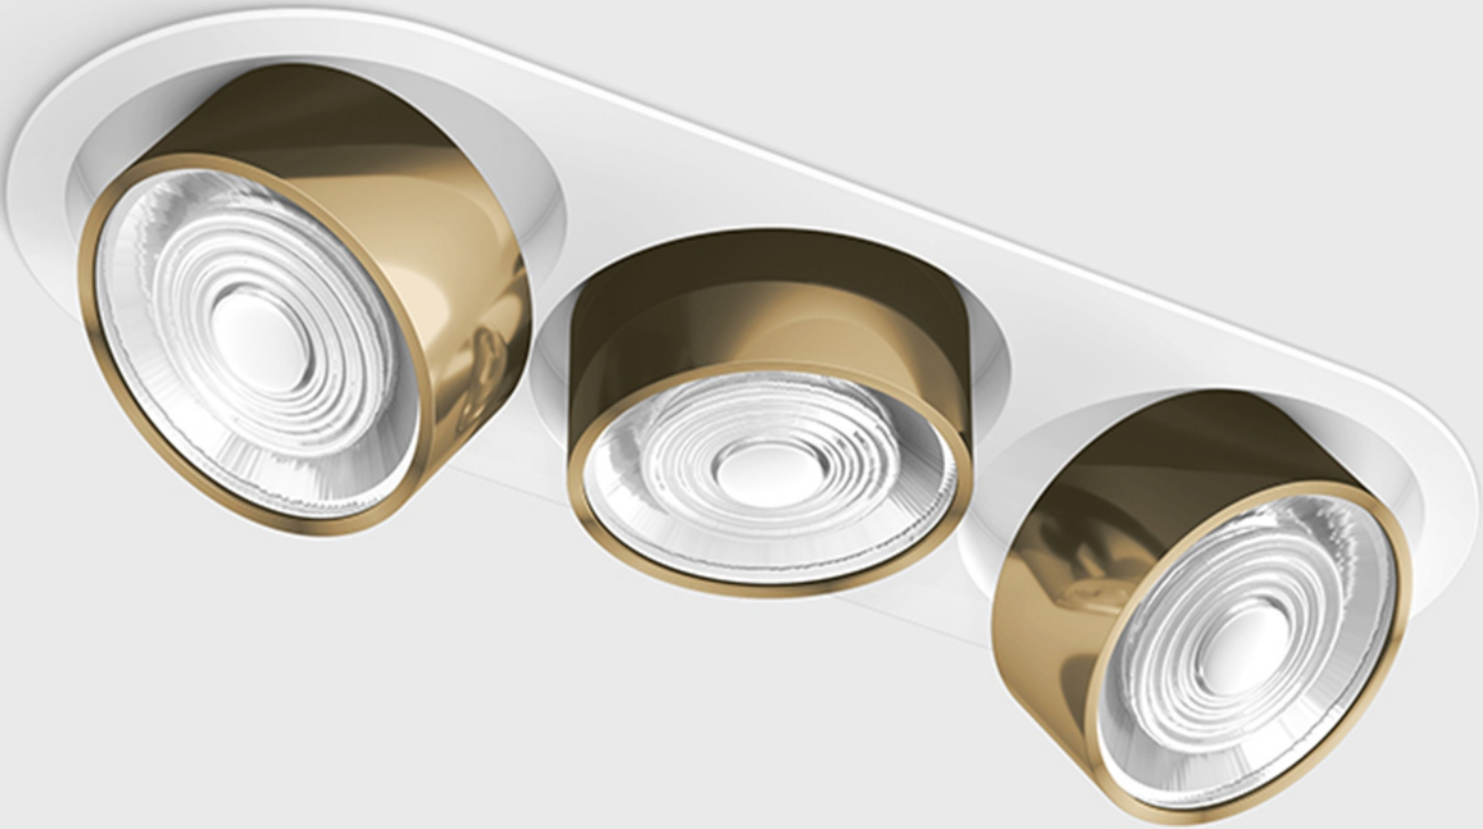

SOL IN MINI X3



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.7523.21.930.XX.***	3x7	3000	>90	200	3x624
01.7523.21.940.XX.***	3x7	4000	>90	200	3x624



MATERIAL | AL

» 497

Color
XX Frame M RING GRAIN


BK/BKG	BK	■		BKG	■
BK/BRG	BK	■		BRG	■
BK/BZG	BK	■		BZG	■
BK/CFG	BK	■		CFG	■
BK/CPG	BK	■		CPG	■
BK/CRG	BK	■		CRG	■
BK/DBG	BK	■		DBG	■
BK/SBG	BK	■		SBG	■
BK/WHG	BK	■		WHG	■
WH/BKG	WH	□		BKG	■
WH/BRG	WH	□		BRG	■
WH/BZG	WH	□		BZG	■
WH/CFG	WH	□		CFG	■
WH/CPG	WH	□		CPG	■
WH/CRG	WH	□		CRG	■
WH/DBG	WH	□		DBG	■
WH/SBG	WH	□		SBG	■
WH/WHG	WH	□		WHG	■

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




Ceiling recessed

ORBITA S




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.4930.16.930.XX.***	12	3000	>90	700	675
01.4930.16.940.XX.***	12	4000	>90	700	675



MATERIAL | AL PC [i](#) » 497

ORBITA M





Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.4960.30.930.XX.***	24	3000	>90	700	1350
01.4960.30.940.XX.***	24	4000	>90	700	1350




MATERIAL | AL PC [i](#) » 497

ORBITA L



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.4990.43.930.XX.***	36	3000	>90	700	2025
01.4990.43.940.XX.***	36	4000	>90	700	2025



MATERIAL | AL PC [i](#) » 497

Color	Frame	Body	***	Options
XX				
BK	BK	BK		ON/OFF
			DALI	DIM DALI
			PC	DIM PHASE CUT



OTHER COLORS TEMPERATURE ON REQUEST

Ceiling recessed



Ceiling recessed

MICRO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2100.13.930.XX.***	12,6	3000	>90	350	980
01.2100.13.940.XX.***	12,6	4000	>90	350	980




MATERIAL | AL

» 497

Color	Shield
XX	
WH	WH ☐


***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Ceiling recessed





NANO R TRIMLESS WITH FRAME RWP



Thanks to the FRAME RWP, the luminaires in-ceiling installation process is greatly simplified.

The frame provides a secure and safe mounting of the luminaires, minimizing the need for additional preparatory work or specialized equipment.

Its design allows you to quickly and easily mount luminaires in the ceiling of any decoration material.

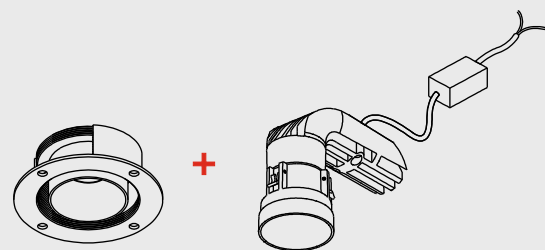


Ø1.38 in
(Ø35 mm)

Ø2.72 in
(Ø69 mm)



NANO R TRIMLESS





Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3900.8.930.XX.***	8	3000	>90	700	640
01.3900.8.940.XX.***	8	4000	>90	700	640

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

OPTIONAL ACCESSORIES

	TRIMLESS TOOL	01.A39TOLS.C
--	---------------	--------------



MATERIAL | AL PC

» 497


ACCESSORIES

	FRAME RWP	01.A39TRLS.RWP
	Honeycomb	01.A39HC
	Lens 12°	01.A39LS12
	Lens 30°	01.A39LS30


» 492

Color	Shield
XX	
BK	BK
BR	BR
CP	CP
MN	MN
WH	WH


***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.3900.8.930.BR




01.3900.8.930.CP




01.3900.8.930.MN

NANO R



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3910.8.930.XX.***	8	3000	>90	700	640
01.3910.8.940.XX.***	8	4000	>90	700	640

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497


ACCESSORIES

	Honeycomb	01.A39HC
	Lens 12°	01.A39LS12
	Lens 30°	01.A39LS30


» 492

Color	Frame	Shield
XX		
BK	BK	BK
BR	BR	BR
MN	MN	MN
WH	WH	WH
BK/BR	BK	BR
BK/CP	BK	CP
BK/MN	BK	MN
BK/WH	BK	WH
BR/BK	BR	BK
BR/WH	BR	WH
MN/BK	MN	BK
MN/WH	MN	WH
WH/BK	WH	BK
WH/BR	WH	BR
WH/CP	WH	CP
WH/MN	WH	MN


***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.3910.8.930.BK/WH




01.3910.8.930.BK/BR



01.3910.8.930.BK/CP



01.3910.8.930.BR



01.3910.8.930.BR/BK



01.3910.8.930.BR/WH




01.3910.8.930.MN



01.3910.8.930.MN/BK




01.3910.8.930.MN/WH



01.3910.8.930.WH/MN




01.3910.8.930.WH/BR



01.3910.8.930.WH/CP

Ceiling recessed

NANO S TR IMLESS




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3901.8.930.XX.***	8	3000	>90	700	640
01.3901.8.940.XX.***	8	4000	>90	700	640

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

OPTIONAL ACCESSORIES

	TRIMLESS TOOL	01.A39TOLS.C
--	---------------	--------------




MATERIAL | AL PC


» 497

Color	Shield
XX	
BK	BK
BR	BR
CP	CP
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.3900.8.930.BR



01.3900.8.930.CP

ACCESSORIES


	Honeycomb	01.A39HC
	Lens 12°	01.A39LS12
	Lens 30°	01.A39LS30

» 492

Ceiling recessed



NANO S



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3911.8.930.XX.***	8	3000	>90	700	640
01.3911.8.940.XX.***	8	4000	>90	700	640

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

ACCESSORIES

	Honeycomb	01.A39HC
	Lens 12°	01.A39LS12
	Lens 30°	01.A39LS30

» 492

Color	Frame	Shield
XX		
BK	BK	BK
WH	WH	WH
BK/BR	BK	BR
BK/CP	BK	CP
BK/WH	BK	WH
WH/BK	WH	BK
WH/BR	WH	BR
WH/CP	WH	CP

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




01.3911.8.930.WH/BR




01.3911.8.930.WH/CP



01.3911.8.930.WH/BK



01.3911.8.930.BK/BR



01.3911.8.930.BK/CP



01.3911.8.930.BK/WH





NANO R WW TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3902.6.930.XX.***	6	3000	>90	500	503
01.3902.6.940.XX.***	6	4000	>90	500	503

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

OPTIONAL ACCESSORIES



MATERIAL | AL PC

» 497



NANO S WW TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3903.6.930.XX.***	6	3000	>90	500	503
01.3903.6.940.XX.***	6	4000	>90	500	503

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

OPTIONAL ACCESSORIES



MATERIAL | AL PC

» 497

Color

XX

BK

BK



WH

WH



Options

	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.3902.6.930.WH




01.3903.6.930.WH

NANO R WW



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3912.6.930.XX.***	6	3000	>90	500	503
01.3912.6.940.XX.***	6	4000	>90	500	503

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL


» 497

NANO S WW



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3913.6.930.XX.***	6	3000	>90	500	503
01.3913.6.940.XX.***	6	4000	>90	500	503

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

Color

XX

BK

BK



WH

WH




Options

	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




01.3912.6.930.WH



01.3913.6.930.WH



NANO TUB S TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3904.7.930.XX.***	4,5	3000	>90	500	491
01.3904.7.940.XX.***	4,5	4000	>90	500	491

i DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

OPTIONAL ACCESSORIES



MATERIAL | AL

i » 497

Color	XX
BK	BK
BR	BR
CR	CR
DB	DB
MN	MN
SB	SB
WH	WH
WHB	WHB

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.3904.7.930.BR



01.3904.7.930.CR



01.3904.7.930.DB



01.3904.7.930.MN




01.3904.7.930.SB



01.3904.7.930.WH

NANO TUB S TRIM



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3905.7.930.XX.***	4,5	3000	>90	500	491
01.3905.7.940.XX.***	4,5	4000	>90	500	491

i DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

i » 497

Color	XX	Frame	Body
BK	BK	BK	BK
BR	BK	BR	BR
CR	BK	CR	CR
DB	BK	DB	DB
MN	BK	MN	MN
SB	BK	SB	SB
WH	WH	WH	WH
WHB	WH	WHB	WHB

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.3905.7.930.BR



01.3905.7.930.CR



01.3905.7.930.DB



01.3905.7.930.MN



01.3905.7.930.SB




01.3905.7.930.WH

SERIES VARIO

VARIO LINEA

VARIO COMFORT

VARIO WALL WASHER

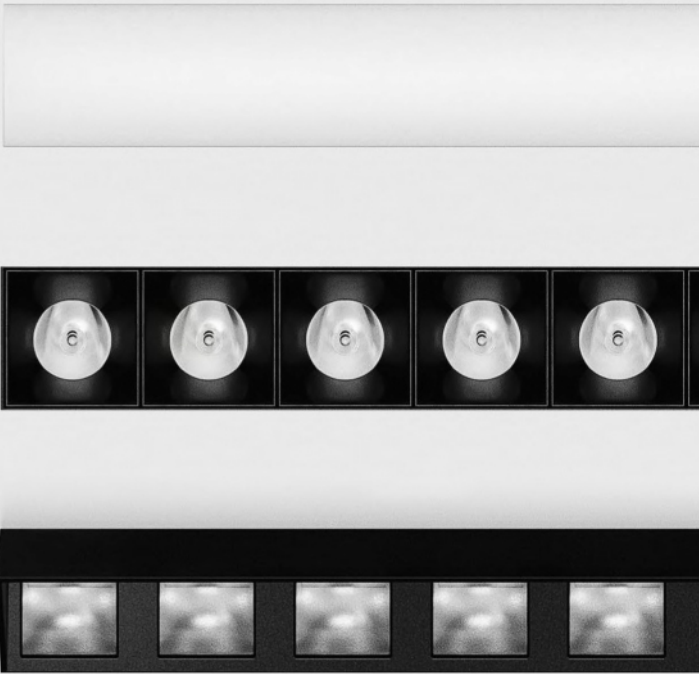


Ceiling recessed

VARIO LINEA 151 TRIMLESS




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.1510.4.930.XX.*** + VARIO FRAME2	4,2	3000	>90	350	585
01.1510.4.940.XX.*** + VARIO FRAME2	4,2	4000	>90	350	585




MATERIAL | AL PC


i » 497



VARIO LINEA 218 TRIMLESS




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2180.6.930.XX.*** + VARIO FRAME3	6,3	3000	>90	350	754
01.2180.6.940.XX.*** + VARIO FRAME3	6,3	4000	>90	350	754



MATERIAL | AL PC

i » 497





Color	Trimless	Body
XX	BK	BK

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

OTHER COLORS TEMPERATURE ON REQUEST

Ceiling recessed


VARIO LINEA 151




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.1510.4.930.XX.***	4,2	3000	>90	350	585
01.1510.4.940.XX.***	4,2	4000	>90	350	585



MATERIAL | AL PC ⓘ » 497




VARIO LINEA 218



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2180.6.930.XX.***	6,3	3000	>90	350	754
01.2180.6.940.XX.***	6,3	4000	>90	350	754




MATERIAL | AL PC ⓘ » 497




Color	Frame	Body
XX		
BK	BK ■ BK ■	
WH	WH □ WH □	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



01.2180.6.930.WH



01.2180.6.930.BK


Ceiling recessed



VARIO COMFORT 85 TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0851.4.930.XX.*** + VARIO FRAME1	4,5	3000	>90	500	336
01.0851.4.940.XX.*** + VARIO FRAME1	4,5	4000	>90	500	336



LED

CE

IP20

INCL

83 x 32

70

36°

UGR<19

MATERIAL |

AL

PC


i

» 497

VARIO COMFORT 85



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.0851.4.930.XX.***	4,5	3000	>90	500	336
01.0851.4.940.XX.***	4,5	4000	>90	500	336



LED

CE

IP20

INCL

79 x 32

70

36°

UGR<19

MATERIAL |

AL

PC


i

» 497

VARIO COMFORT 151 TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.1511.9.930.XX.*** + VARIO FRAME2	9	3000	>90	500	672
01.1511.9.940.XX.*** + VARIO FRAME2	9	4000	>90	500	672



LED

CE

IP20

INCL

151 x 32

70

36°

UGR<19

MATERIAL |

AL

PC


i

» 497

VARIO COMFORT 151



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.1511.9.930.XX.***	9	3000	>90	500	672
01.1511.9.940.XX.***	9	4000	>90	500	672



LED

CE

IP20

INCL

147 x 32

70

36°

UGR<19

MATERIAL |


AL

PC


i

» 497

VARIO COMFORT 218 TRIMLESS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2181.14.930.XX.*** + VARIO FRAME3	14	3000	>90	500	1040
01.2181.14.940.XX.*** + VARIO FRAME3	14	4000	>90	500	1040



LED

CE

IP20

INCL

223 x 32

70

36°

UGR<19

MATERIAL |

AL

PC

i

» 497

Color

XX

BK

BK

Options

ON/OFF

DALI

DIM DALI


PC

DIM PHASE CUT

VARIO COMFORT 218



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2181.14.930.XX.***	14	3000	>90	500	1040
01.2181.14.940.XX.***	14	4000	>90	500	1040



LED

CE

IP20

INCL

214 x 32

70

36°

UGR<19

MATERIAL |

AL

PC

i

» 497

Color

XX

BK

BK

WH

WH

Options

ON/OFF


DALI

DIM DALI

PC

DIM PHASE CUT

VARIO WALL WASHER 218 TRIMLESS




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2185.10.930.XX.*** + VARIO FRAME3	10	3000	>90	350	720
01.2185.10.940.XX.*** + VARIO FRAME3	10	4000	>90	350	720
01.2185.14.930.XX.*** + VARIO FRAME3	14	3000	>90	500	1010
01.2185.14.940.XX.*** + VARIO FRAME3	14	4000	>90	500	1010

LED CE III F IP20 INCL 223 x 32 70 48 x 25*

MATERIAL | AL PC


i » 497



Color	Frame	Body
XX		
BK	BK ■ BK ■	
WH	WH □ BK ■	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

VARIO WALL WASHER 218




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.2185.10.930.XX.***	10	3000	>90	350	720
01.2185.10.940.XX.***	10	4000	>90	350	720
01.2185.14.930.XX.***	14	3000	>90	500	1010
01.2185.14.940.XX.***	14	4000	>90	500	1010

LED CE III F IP20 INCL 214 x 32 70 48 x 25*

MATERIAL | AL PC

i » 318




Color	Frame	Body
XX		
BK	BK ■ BK ■	
WH	WH □ BK ■	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

Ceiling surface

GHOST

NEW



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
02.0645.8.930.XX	8	3000	>90	220-240	620
02.0645.8.940.XX	8	4000	>90	220-240	620

NECESSARY USE PHASE CUT DIMMER

LED CE IP20 INCL 50° UGR<19

MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK
BR	BR
MN	MN
SB	SB
WH	WH



02.0645.8.930.BR



02.0645.8.930.MN





02.0645.8.930.SB

Ceiling surface



GHOST

NEW



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
02.0652.8.930.XX	8	3000	>90	220-240	620
02.0652.8.940.XX	8	4000	>90	220-240	620


NECESSARY USE PHASE CUT DIMMER

LED CE IP20 INCL 50° UGR<19

MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK
BR	BR
MN	MN
SB	SB
WH	WH



02.0652.8.930.BR



02.0652.8.930.MN




02.0652.8.930.SB



Ceiling surface

TUB M S 110



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0511.9.930.XX.***	9	3000	>90	250	540
02.0511.9.940.XX.***	9	4000	>90	250	540

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
BR	BR
DB	DB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 492

Ceiling surface




TUB M SA 90



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0591.9.930.XX.***	9	3000	>90	250	540
02.0591.9.940.XX.***	9	4000	>90	250	540

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
BR	BR
DB	DB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



02.0591.9.930.BK



02.0591.9.930.BR



02.0591.9.930.DB



02.0591.9.930.WH

ACCESSORIES


	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 492

TUB M SA NB



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
02.0595.9.930.XX	9	3000	>90	220-240	750
02.0595.9.940.XX	9	4000	>90	220-240	750



MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
WH	WH



02.0595.9.930.BK + 06.A05SH.BR



02.0595.9.930.BK + 06.A05SH.CP



02.0595.9.930.WH + 06.A05SH.BR




02.0595.9.930.WH + 06.A05SH.CP

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT

» 492

TUB M SA 140



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0514.13.930.XX.***	13	3000	>90	350	758
02.0514.13.940.XX.***	13	4000	>90	350	758

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



02.0514.13.930.BK + 06.A05SH.BR



02.0514.13.930.BK + 06.A05SH.CP



02.0514.13.930.WH + 06.A05SH.BR



02.0514.13.930.WH + 06.A05SH.CP

ACCESSORIES


	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 492



Ceiling surface

TUB L S 150



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0711.18.930.XX.***	18	3000	>90	500	1287
02.0711.18.940.XX.***	18	4000	>90	500	1287

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL


ⓘ » 497

ACCESSORIES

Honeycomb	06.A07HC
-----------	----------

ⓘ » 492

TUB L SA 150



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0715.13.930.XX.***	13	3000	>90	350	1023
02.0715.13.940.XX.***	13	4000	>90	350	1023

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

ACCESSORIES

Honeycomb	06.A07HC
-----------	----------

ⓘ » 492

Color	Body
XX	
BK	
WH	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



02.0711.18.930.WH



02.0711.18.930.BK


OTHER COLORS TEMPERATURE ON REQUEST

Ceiling surface



Ceiling surface

TURBINE



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0190.15.930.XX.***	15	3000	>90	500	1800
02.0190.15.940.XX.***	15	4000	>90	500	1800



MATERIAL |  AL

 » 497

Color	
XX	Body
BK	BK 
WH	WH 

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



02.0190.15.930.WH




02.0190.15.930.BK

Ceiling surface



SOL SURF MINI



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.7526.7.930.XX.***	7	3000	>90	350	624
02.7526.7.940.XX.***	7	4000	>90	350	624


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

SOL SURF



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.9533.14.930.XX.***	14	3000	>90	350	1446
02.9533.14.940.XX.***	14	4000	>90	350	1446

* DIM DALI/DIM PHASE CUT must be placed on remote



MATERIAL | AL

ⓘ » 497


Color	Body	M RING
XX		
BK	BK	BK
BK/BR	BK	BR
BK/CP	BK	CP
BK/CR	BK	CR
BK/DB	BK	DB
BK/WH	BK	WH
WH	WH	WH
WH/BK	WH	BK
WH/BR	WH	BR
WH/CP	WH	CP
WH/CR	WH	CR
WH/DB	WH	DB

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

CHECK OTHER COLORS ON PAGE 494



SOL SURF MINI



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.7526.7.930.XX.***	7	3000	>90	350	624
02.7526.7.940.XX.***	7	4000	>90	350	624


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

SOL SURF



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.9533.14.930.XX.***	14	3000	>90	350	1446
02.9533.14.940.XX.***	14	4000	>90	350	1446

* DIM DALI/DIM PHASE CUT must be placed on remote



MATERIAL | AL

ⓘ » 497

Color
XX Body MRING GRAIN

BK/BKG	BK	BKG
BK/BRG	BK	BRG
BK/BZG	BK	BZG
BK/CFG	BK	CFG
BK/CPG	BK	CPG
BK/CRG	BK	CRG
BK/DBG	BK	DBG
BK/SBG	BK	SBG
BK/WHG	BK	WHG
WH/BKG	WH	BKG
WH/BRG	WH	BRG
WH/BZG	WH	BZG
WH/CFG	WH	CFG
WH/CPG	WH	CPG
WH/CRG	WH	CRG
WH/DBG	WH	DBG
WH/SBG	WH	SBG
WH/WHG	WH	WHG



***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

CHECK OTHER COLORS ON PAGE 494



Ceiling surface

GLOW M



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0910.9.930.XX.***	9	3000	>90	250	445
02.0910.9.940.XX.***	9	4000	>90	250	445


DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC

» 497

GLOW L



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.1910.18.930.XX.***	18	3000	>90	500	700
02.1910.18.940.XX.***	18	4000	>90	500	700




MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK
BR	BR
WH	WH


***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



02.0910.9.930.BK



02.0910.9.930.BR



02.1910.18.930.BK




02.1910.18.930.BR

Ceiling surface



Ceiling surface

PRISMA S




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0980.9.930.XX.***	9	3000	>90	250	720
02.0980.9.940.XX.***	9	4000	>90	250	720

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PMMA » 497

PRISMA M



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.1580.13.930.XX.***	13	3000	>90	350	881
02.1580.13.940.XX.***	13	4000	>90	350	881




MATERIAL | AL PMMA » 497

Color XX	Body	Shield
BK	BK	BK
BK/BR	BK	BR
BK/WH	BK	WH
BR	BR	BR
BR/BK	BR	BK
BR/WH	BR	WH
WH	WH	WH
WH/BK	WH	BK
WH/BR	WH	BR

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

Ceiling surface

PRISMA L




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.1980.16.930.XX.***	16	3000	>90	500	1778
02.1980.16.940.XX.***	16	4000	>90	500	1778



MATERIAL | AL PMMA » 497

Color XX	Body	Shield
BK	BK	BK
BK/BR	BK	BR
BK/WH	BK	WH
BR	BR	BR
BR/BK	BR	BK
BR/WH	BR	WH
WH	WH	WH
WH/BK	WH	BK
WH/BR	WH	BR

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



02.1580.13.930.BK



02.1580.13.930.BR/BK



02.1580.13.930.BK/WH



02.1580.13.930.BK/BR




02.1980.16.930.BK



02.1980.16.930.BK/BR




02.1980.16.930.BR/BK



02.1980.16.930.WH

Ceiling surface

ROLL



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
02.0800.10.930.XX.***	9	3000	>90	250	820
02.0800.10.940.XX.***	9	4000	>90	250	870



MATERIAL | AL

i » 497

Color	Body
XX	
BK	BK ■
WH	WH □

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



02.0800.10.930.WH




02.0800.10.930.BK

Ceiling surface



BRIGHT S




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2239.15.930/940.WH	945	15	3000/4000	>90	220-240	White
	630	10				
	560	8				



MATERIAL | AL PC » 497

BRIGHT M




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.3039.24.930/940.WH	1610	24	3000/4000	>90	220-240	White
	1260	18				
	700	10				



MATERIAL | AL PC » 497



FLAT R1




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2255.15.930/940.WH	1190 770	15 10	3000/4000	>90	220-240	White



MATERIAL | PC PC » 497

FLAT R2




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2749.24.930/940.WH	1960 1470 805	24 18 10	3000/4000	>90	220-240	White



MATERIAL | PC PC » 497

FLAT R3




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.4065.32.930/940.WH	2880 1960	32 24	3000/4000	>90	220-240	White



MATERIAL | PC PC » 497

FLAT S1




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2121.15.930/940.WH	1210 770	15 10	3000/4000	>90	220-240	White



MATERIAL | PC PC » 497

FLAT S2




Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.2626.24.930/940.WH	1960 1470 805	24 18 10	3000/4000	>90	220-240	White



MATERIAL | PC PC » 497

FLAT S3



Code	Product Lumen	Power Watt	Color T (K)	CRI	V	Color
02.4040.32.930/940.WH	2660 2030	38 29	3000/4000	>90	220-240	White




MATERIAL | PC PC » 497

BUTTON RS



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.0150.8.930.XX.***	8	3000	>90	500	720
10.0150.8.940.XX.***	8	4000	>90	500	720

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL PC

» 497

BUTTON RM



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.0220.14.930.XX.***	14	3000	>90	500	960
10.0220.14.940.XX.***	14	4000	>90	500	960



MATERIAL | AL PC

» 497

Color	Body
XX	
CG	CG


***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

BUTTON SM



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.0220.15.930.XX.***	14,4	3000	>90	500	720
10.0220.15.940.XX.***	14,4	4000	>90	500	720

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

STRAIGHT




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
02.7015.1.930.XX	18	3000	>90	48	1800
02.7015.1.940.XX	18	4000	>90	48	1800

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC » 497

STRAIGHT



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
02.7015.2.930.XX	36	3000	>90	48	3600
02.7015.2.940.XX	36	4000	>90	48	3600

DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL PC » 497

Color	Body
XX	
BK	BK
WH	WH




02.7015.1.930.BK



02.7015.2.930.BK



ROD




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1000.10.930.XX.***	10,5	3000	>90	24	630

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC » 497

ROD



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1500.17.930.XX.***	18	3000	>90	24	1080

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL PC » 497

Color	
XX	Body
BK	BK

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

ROD




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1900.23.930.XX.***	25	3000	>90	24	1500

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC » 497

ROD



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.2483.30.930.XX.***	30	3000	>90	24	1800

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL PC » 497

Color	
XX	Body
BK	BK

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

Wall surface

SLIMLINE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1807.5.930.XX	5	3000	>90	48	400


DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

» 497

SLIMLINE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1810.8.930.XX	8	3000	>90	48	640

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

» 497

Color	XX	Body
BR	BR	


ACCESSORIES

	Surface mounted bracket, 2 pcs	10.A1804.BR
	Surface mounted bracket, 2 pcs	10.A1816.BR

Wall surface



SLIMLINE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1812.10.930.XX	10	3000	>90	48	800


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC


ⓘ » 497

SLIMLINE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1818.15.930.XX	15	3000	>90	48	1200

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC


ⓘ » 497

Color	XX	Body
BR	BR	

ACCESSORIES





Surface mounted bracket, 2 pcs
10.A1804.BR



Surface mounted bracket, 2 pcs
10.A1816.BR



STRAW



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.1576.6.930.XX.***	6	3000	>90	350	413
10.1576.6.940.XX.***	6	4000	>90	350	413

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC

» 497

Color	Body
XX	
BK	
BR	

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



10.1576.6.930.BK





10.1576.6.930.BR

OTHER COLORS TEMPERATURE ON REQUEST



STRAW




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1507.5.930.XX	5	3000	>90	48	400
10.1507.5.940.XX	5	4000	>90	48	400

ⓘ DRIVER MUST BE PLACED ON REMOTE

LEDCE⏚IIIFFIP20EXCL□■△⊞

MATERIAL | AL PC ⓘ » 497

STRAW




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1512.10.930.XX	10	3000	>90	48	800
10.1512.10.940.XX	10	4000	>90	48	800

ⓘ DRIVER MUST BE PLACED ON REMOTE

LEDCE⏚IIIFFIP20EXCL□■△⊞

MATERIAL | AL PC ⓘ » 497

STRAW



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1518.15.930.XX	15	3000	>90	48	1200
10.1518.15.940.XX	15	4000	>90	48	1200

ⓘ DRIVER MUST BE PLACED ON REMOTE

LEDCE⏚IIIFFIP20EXCL□■△⊞

MATERIAL | AL PC ⓘ » 497

Color	Body
XX	
BK	
BR	


ACCESSORIES

Surface mounted bracket 10.A1511.BK




10.A1511.BK

OTHER COLORS TEMPERATURE ON REQUEST

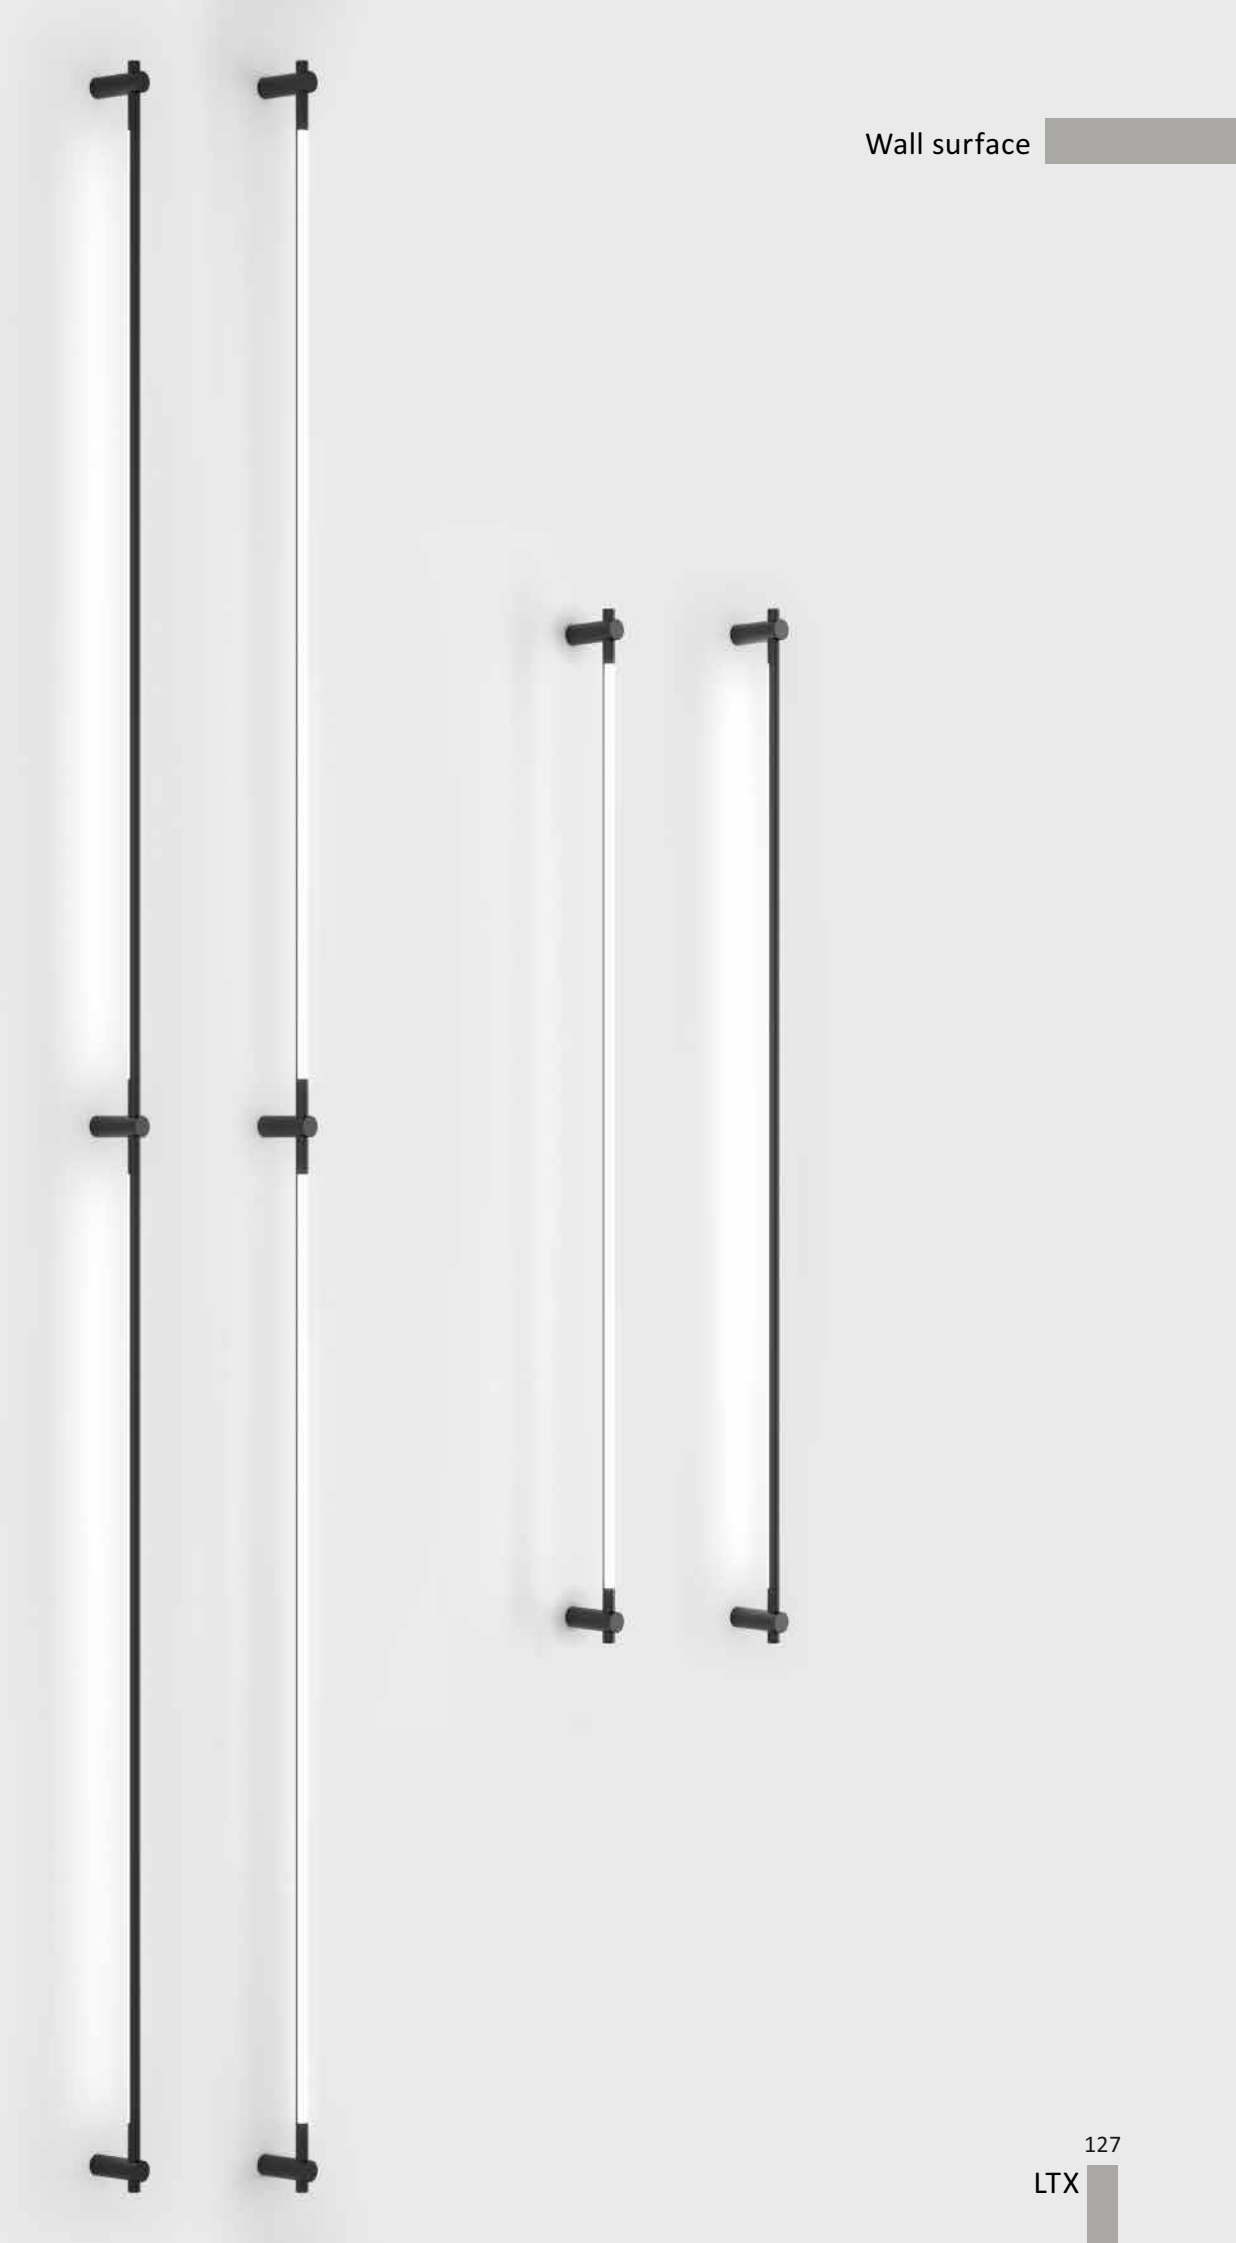

SFERA WALL S





Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.0613.4.930.XX	4	3000	>90	350	243
10.0613.4.940.XX	4	4000	>90	350	243



MATERIAL | AL GL

i » 497

SFERA WALL M



MATERIAL | AL GL

i » 497

Color XX	Body
BK	BK ■
BR	BR ■




10.0613.4.930.BR



10.0634.5.930.BR




TOUCH TO DIMM

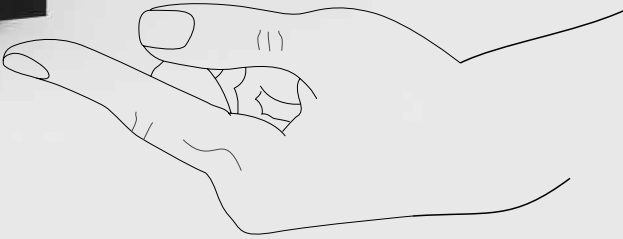


Wall surface

TO READ IN




TO READ



Color	
XX	Body
BK	BK ■
BRM	BRM ■
WH	WH □


Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.0372.2.930.XX	2,1	3000	>90	700	126
10.0372.2.940.XX	2,1	4000	>90	700	126



MATERIAL | AL

i » 497

Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.0388.2.930.XX	2,1	3000	>90	700	126
10.0388.2.940.XX	2,1	4000	>90	700	126



MATERIAL | AL

i » 497



10.0388.2.930.BK



10.0388.2.930.BR

OTHER COLORS TEMPERATURE ON REQUEST

Wall surface



R-GROUP STUDIO & OKSANA ROZHKOVA


Wall recessed

IN WALL RING



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
01.3853.R1.830.XX	1	3000	>80	24	20
01.3853.R1.840.XX	1	4000	>80	24	20

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | INOX PC

» 497


Color	Body
XX	
ST	ST ■

Wall recessed



Wall recessed

IN WALL O



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3805.EL.930.XX.***	3,3	3000	>90	700	364
01.3805.EL.940.XX.***	3,3	4000	>90	700	364


DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

IN WALL S



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.3805.SQ.930.XX.***	3,3	3000	>90	700	364
01.3805.SQ.940.XX.***	3,3	4000	>90	700	364

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

Color

XX

BK

BK



WH

WH



Options

ON/OFF

DALI


DIM DALI

PC


DIM PHASE CUT




01.3805.EL.930.WH



01.3805.EL.930.BK



01.3806.SQ.930.WH




01.3806.SQ.930.BK

Wall recessed



Wall recessed

STEP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
01.4512.2.930.XX.***	2,1	3000	>90	700	89
01.4512.2.940.XX.***	2,1	4000	>90	700	89

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

Color

XX

BK

BK



WH

WH



Options

ON/OFF

DALI

DIM DALI

PC

DIM PHASE CUT



01.4512.2.930.WH



01.4512.2.930.BK

Wall recessed



Ceiling suspended




SUSPENDED TUB SERIES

The TUB suspended series is a collection of pendant lights, which allows the creation of different combination diameter and length in order to create a unique composition of pendant lights. The TUB has a cylindrical shape and is available in a variety of sizes and finishes to suit different design preferences.

Ceiling suspended



TUB XS P



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0160.2.930.XX.***	2,4	3000	>90	700	137
03.0160.2.940.XX.***	2,4	4000	>90	700	137


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

TUB XS P NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0161.2.930.XX.***	2,4	3000	>90	700	137
03.0161.2.940.XX.***	2,4	4000	>90	700	137


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

TUB XS P NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0162.2.930.XX.***	2,4	3000	>90	700	137
03.0162.2.940.XX.***	2,4	4000	>90	700	137

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

Color	Body
XX	
BK	BK
BR	BR
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Black



Brass



White

Color	Body
XX	
BK	BK
BR	BR
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Surface base




Trimless base



Frame base

MATCH S P 450



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0340.7.930.XX.***	7	3000	>90	700	415
03.0340.7.940.XX.***	7	4000	>90	700	415


DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | BR PC

» 497

MATCH S P 450 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0341.7.930.XX.***	7	3000	>90	700	415
03.0341.7.940.XX.***	7	4000	>90	700	415


DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | BR PC

» 497

MATCH S P 450 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0342.7.930.XX.***	7	3000	>90	700	415
03.0342.7.940.XX.***	7	4000	>90	700	415

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | BR PC

» 497

Color	Body
XX	
BR	BR

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Surface base

Color	Body
XX	
BR	BR


***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Trimless base

Frame base

MATCH S P 550



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0350.7.930.XX.***	7	3000	>90	700	415
03.0350.7.940.XX.***	7	4000	>90	700	415


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 497

MATCH S P 550 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0351.7.930.XX.***	7	3000	>90	700	415
03.0351.7.940.XX.***	7	4000	>90	700	415


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 497

MATCH S P 550 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0352.7.930.XX.***	7	3000	>90	700	415
03.0352.7.940.XX.***	7	4000	>90	700	415

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 497

Color	Body
XX	
BR	BR

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Surface base

Color	Body
XX	
BR	BR

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




Trimless base



Frame base

TUB S P 200



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0320.8.930.XX.***	8	3000	>90	700	610
03.0320.8.940.XX.***	8	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24



MATERIAL | AL

ⓘ » 497


ⓘ » 492

Color XX	Body
BK	BK
BR	BR
BZ	BZ
DB	DB
MN	MN
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Brass



Midnight



Bronze



Sahara beige





Diamond black



White

TUB S P 200 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0321.8.930.XX.***	8	3000	>90	700	610
03.0321.8.940.XX.***	8	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24




MATERIAL | AL

ⓘ » 497

ⓘ » 492

TUB S P 200 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0322.8.930.XX.***	8	3000	>90	700	610
03.0322.8.940.XX.***	8	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES		
	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24



MATERIAL | AL

ⓘ » 497

ⓘ » 492

Color XX	Body
BK	BK
BR	BR
BZ	BZ
DB	DB
MN	MN
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Surface base



Trimless base



Frame base

TUB S P 300



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0330.8.930.XX.***	8	3000	>90	700	610
03.0330.8.940.XX.***	8	4000	>90	700	610

i DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24



MATERIAL | AL

i » 497


i » 492

Color	Body
XX	
BK	BK
BR	BR
BZ	BZ
MN	MN
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Black



Midnight



Brass



Sahara beige





Bronze



White

TUB S P 300 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0331.8.930.XX.***	8	3000	>90	700	610
03.0331.8.940.XX.***	8	4000	>90	700	610

i DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24




MATERIAL | AL

i » 497

i » 492

TUB S P 300 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0332.8.930.XX.***	8	3000	>90	700	610
03.0332.8.940.XX.***	8	4000	>90	700	610

i DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24



MATERIAL | AL

i » 497

i » 492

Color	Body
XX	
BK	BK
BR	BR
BZ	BZ
MN	MN
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Surface base




Trimless base



Frame base

TUB S P 600



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0360.8.930.XX.***	8	3000	>90	700	610
03.0360.8.940.XX.***	8	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24



MATERIAL | AL

ⓘ » 497


ⓘ » 492

Color	Body
XX	
BK	BK
BR	BR
BZ	BZ
MN	MN
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Black



Midnight



Brass



Sahara beige




Bronze



White

TUB S P 600 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0361.8.930.XX.***	8	3000	>90	700	610
03.0361.8.940.XX.***	8	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24




MATERIAL | AL

ⓘ » 497

ⓘ » 492

TUB S P 600 NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0362.8.930.XX.***	8	3000	>90	700	610
03.0362.8.940.XX.***	8	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24



MATERIAL | AL

ⓘ » 497

ⓘ » 492

Color	Body
XX	
BK	BK
BR	BR
BZ	BZ
MN	MN
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Surface base




Trimless base



Frame base

TUB S P 300 ZOOM



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0309.6.930.XX.***	5,4	3000	>90	700	228-307
03.0309.6.940.XX.***	5,4	4000	>90	700	228-307



ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

TUB S P 300 ZOOM NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0319.6.930.XX.***	5,4	3000	>90	700	228-307
03.0319.6.940.XX.***	5,4	4000	>90	700	228-307


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

TUB S P 300 ZOOM NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0329.6.930.XX.***	5,4	3000	>90	700	228-307
03.0329.6.940.XX.***	5,4	4000	>90	700	228-307

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

ⓘ » 497

Color	Body
XX	
BK	BK ■
WH	WH □

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



White



Black

OTHER COLORS TEMPERATURE ON REQUEST



Surface base



Trimless base




Frame base

Color	Body
XX	
BK	BK ■
WH	WH □

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

OTHER COLORS TEMPERATURE ON REQUEST

TUB M P 200 DTW



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0521.12.DTW.XX	12	3000	>95	350	1150

NECESSARY USE PHASE CUT DIMMER



MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
WH	WH



03.0521.12.DTW.WH + 06.A05SHL.BR



03.0521.12.DTW.BK + 06.A05SHL.BR



03.0521.12.DTW.WH + 06.A05SHL.CP



03.0521.12.DTW.BK + 06.A05SHL.CP

ACCESSORIES	
Shield TUB M Copper	06.A05SH.CP
Shield TUB M Brass	06.A05SH.BR
Shield L TUB M Copper	06.A05SHL.CP
Shield L TUB M Brass	06.A05SHL.BR
Wall washer	06.A05WW
Snoot, black	06.A05NB
Foggy cover	06.A05FG
Honeycomb	06.A05HC
Elips diffuser	06.A05ELPS
Foggy diffuser	06.A05SFT
Lens 15°	06.A05LS15
Lens 30°	06.A05LS30

» 492

Dim to warm it is a new technology for regulation of light intensity and color temperature synchronously. Necessary use phase cut dimmer.

3000K
100%




2700K
50%



1800K
5%



TUB M P 200



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0521.19.930.XX.***	10,8	3000	>90	500	1120
03.0521.19.940.XX.***	10,8	4000	>90	500	1120

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
BR	BR
BZ	BZ
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Brass



Bronze



Sahara beige




White

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

» 492

TUB M P 200 ZOOM



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.0529.13.930.XX.***	13	3000	>90	700	615-1040
03.0529.13.940.XX.***	13	4000	>90	700	615-1040

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



03.0529.13.930.BK




03.0529.13.930.WH



Surface base

Ceiling suspended

BALL M P



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.1000.7.930.XX.***	7	3000	>90	700	590
03.1000.7.940.XX.***	7	4000	>90	700	590

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL GL

» 497

Ceiling suspended

BALL M P NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.1001.7.930.XX.***	7	3000	>90	700	590
03.1001.7.940.XX.***	7	4000	>90	700	590


DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL GL

» 497

BALL M P NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.1002.7.930.XX.***	7	3000	>90	700	590
03.1002.7.940.XX.***	7	4000	>90	700	590

DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL GL

» 497

Color	Body
XX	
BK	BK
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT

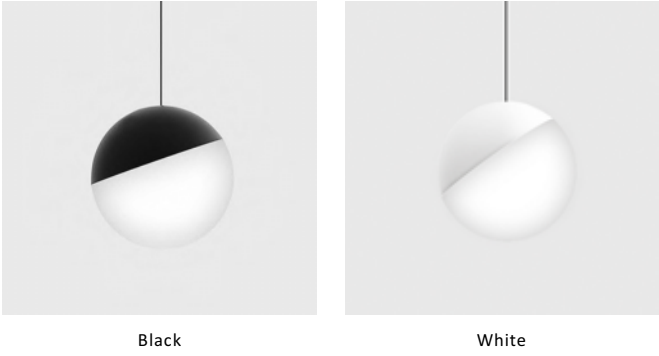

Black White

OTHER COLORS TEMPERATURE ON REQUEST

Color	Body
XX	
BK	BK
WH	WH


***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Surface base Trimless base Frame base

OTHER COLORS TEMPERATURE ON REQUEST

BALL L




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
03.1800.28.930.XX	28	3000	>90	220-240	2028
03.1800.28.940.XX	28	4000	>90	220-240	2028




MATERIAL | AL GL

i » 497



BALL L DTW




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
03.1800.28.DTW.XX	28	DIM to warm 1800-3000	>90	220-240	2028



MATERIAL | AL GL

i » 497



Color	Body
XX	BK ■
BK	BK ■
WH	WH □




02.1800.28.930.WH



02.1800.28.930.BK

CONE P



MATERIAL | AL PC

i » 497

Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.3200.12.930.XX.***	12	3000	>90	700	715
03.3200.12.940.XX.***	12	4000	>90	700	715

i DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE

Color	Body
XX	BK ■
BK	BK ■

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




03.3200.12.930.BK




Surface base

Ceiling suspended

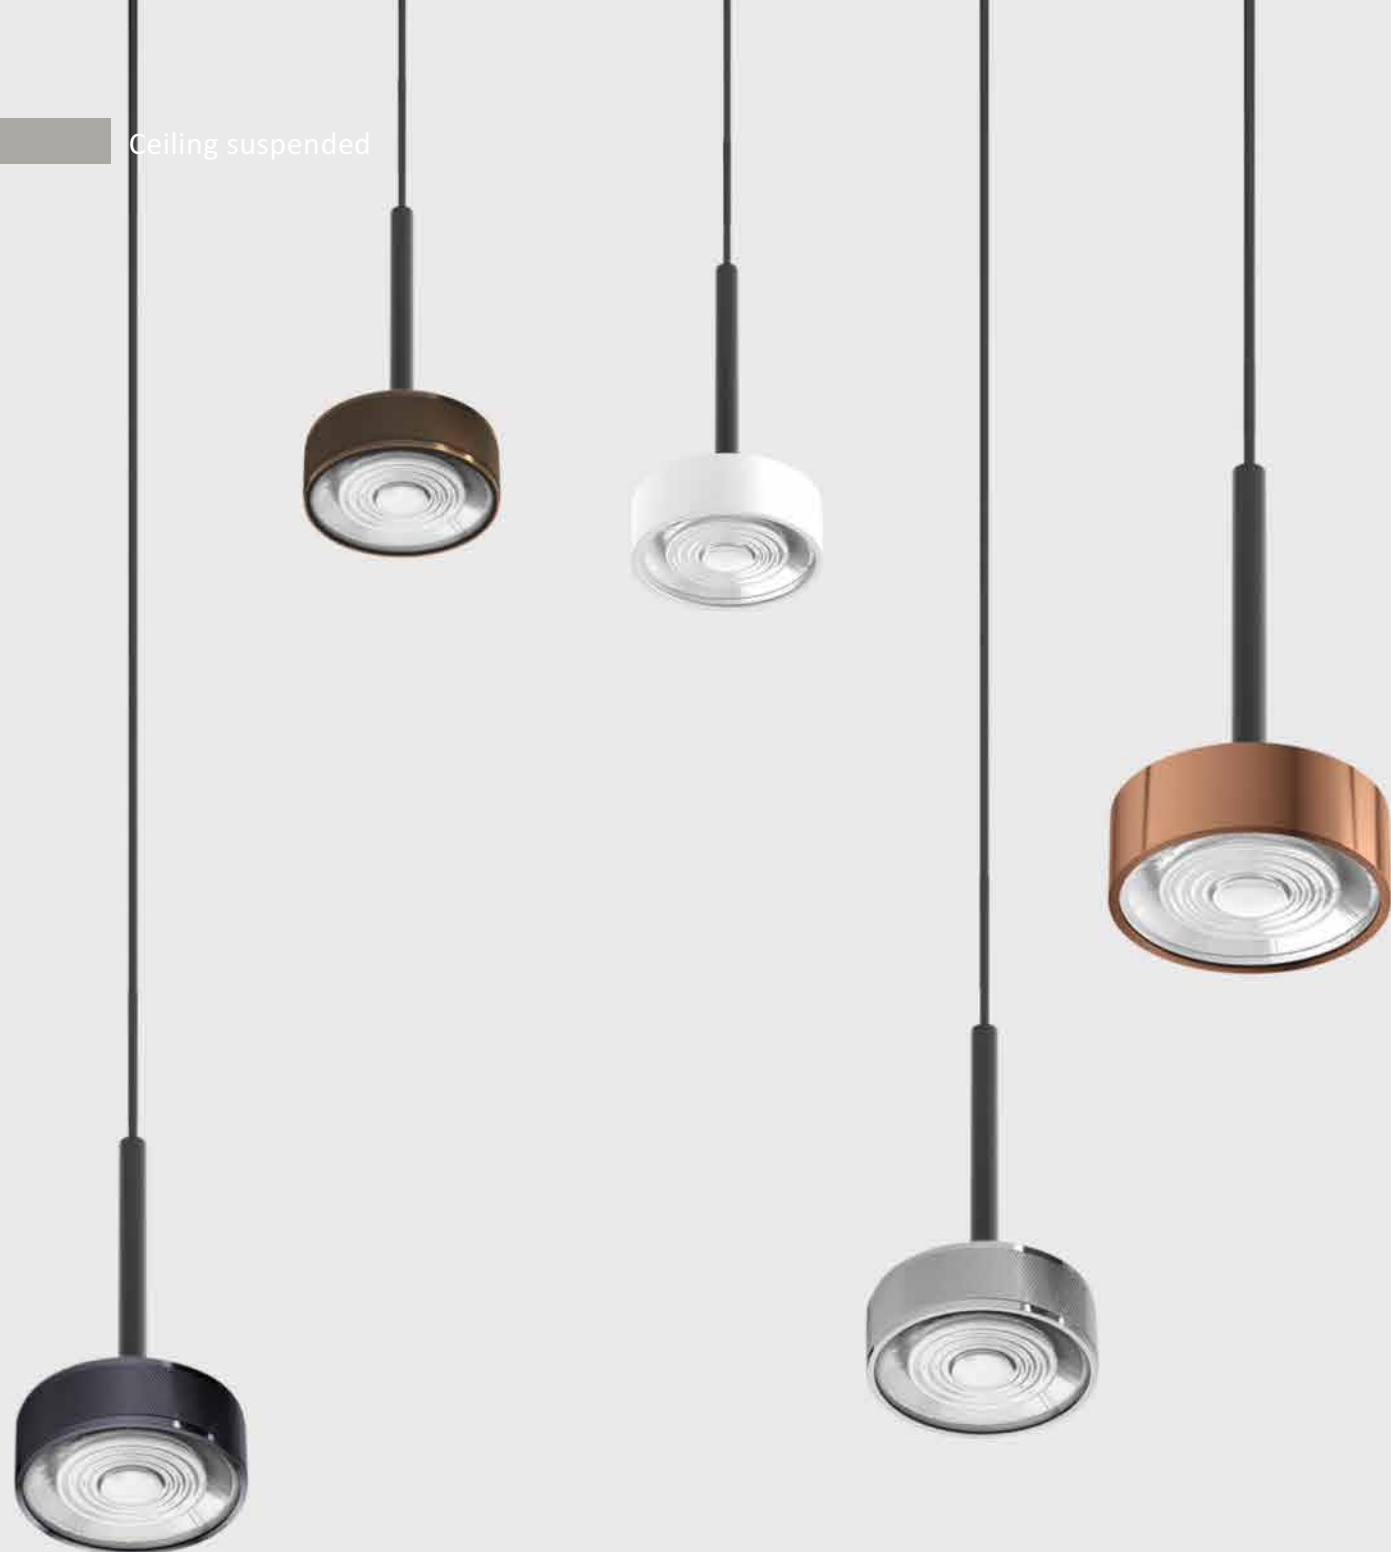


SUSPENDED LUMINAIRE **SOL MINI P**

Ceiling suspended

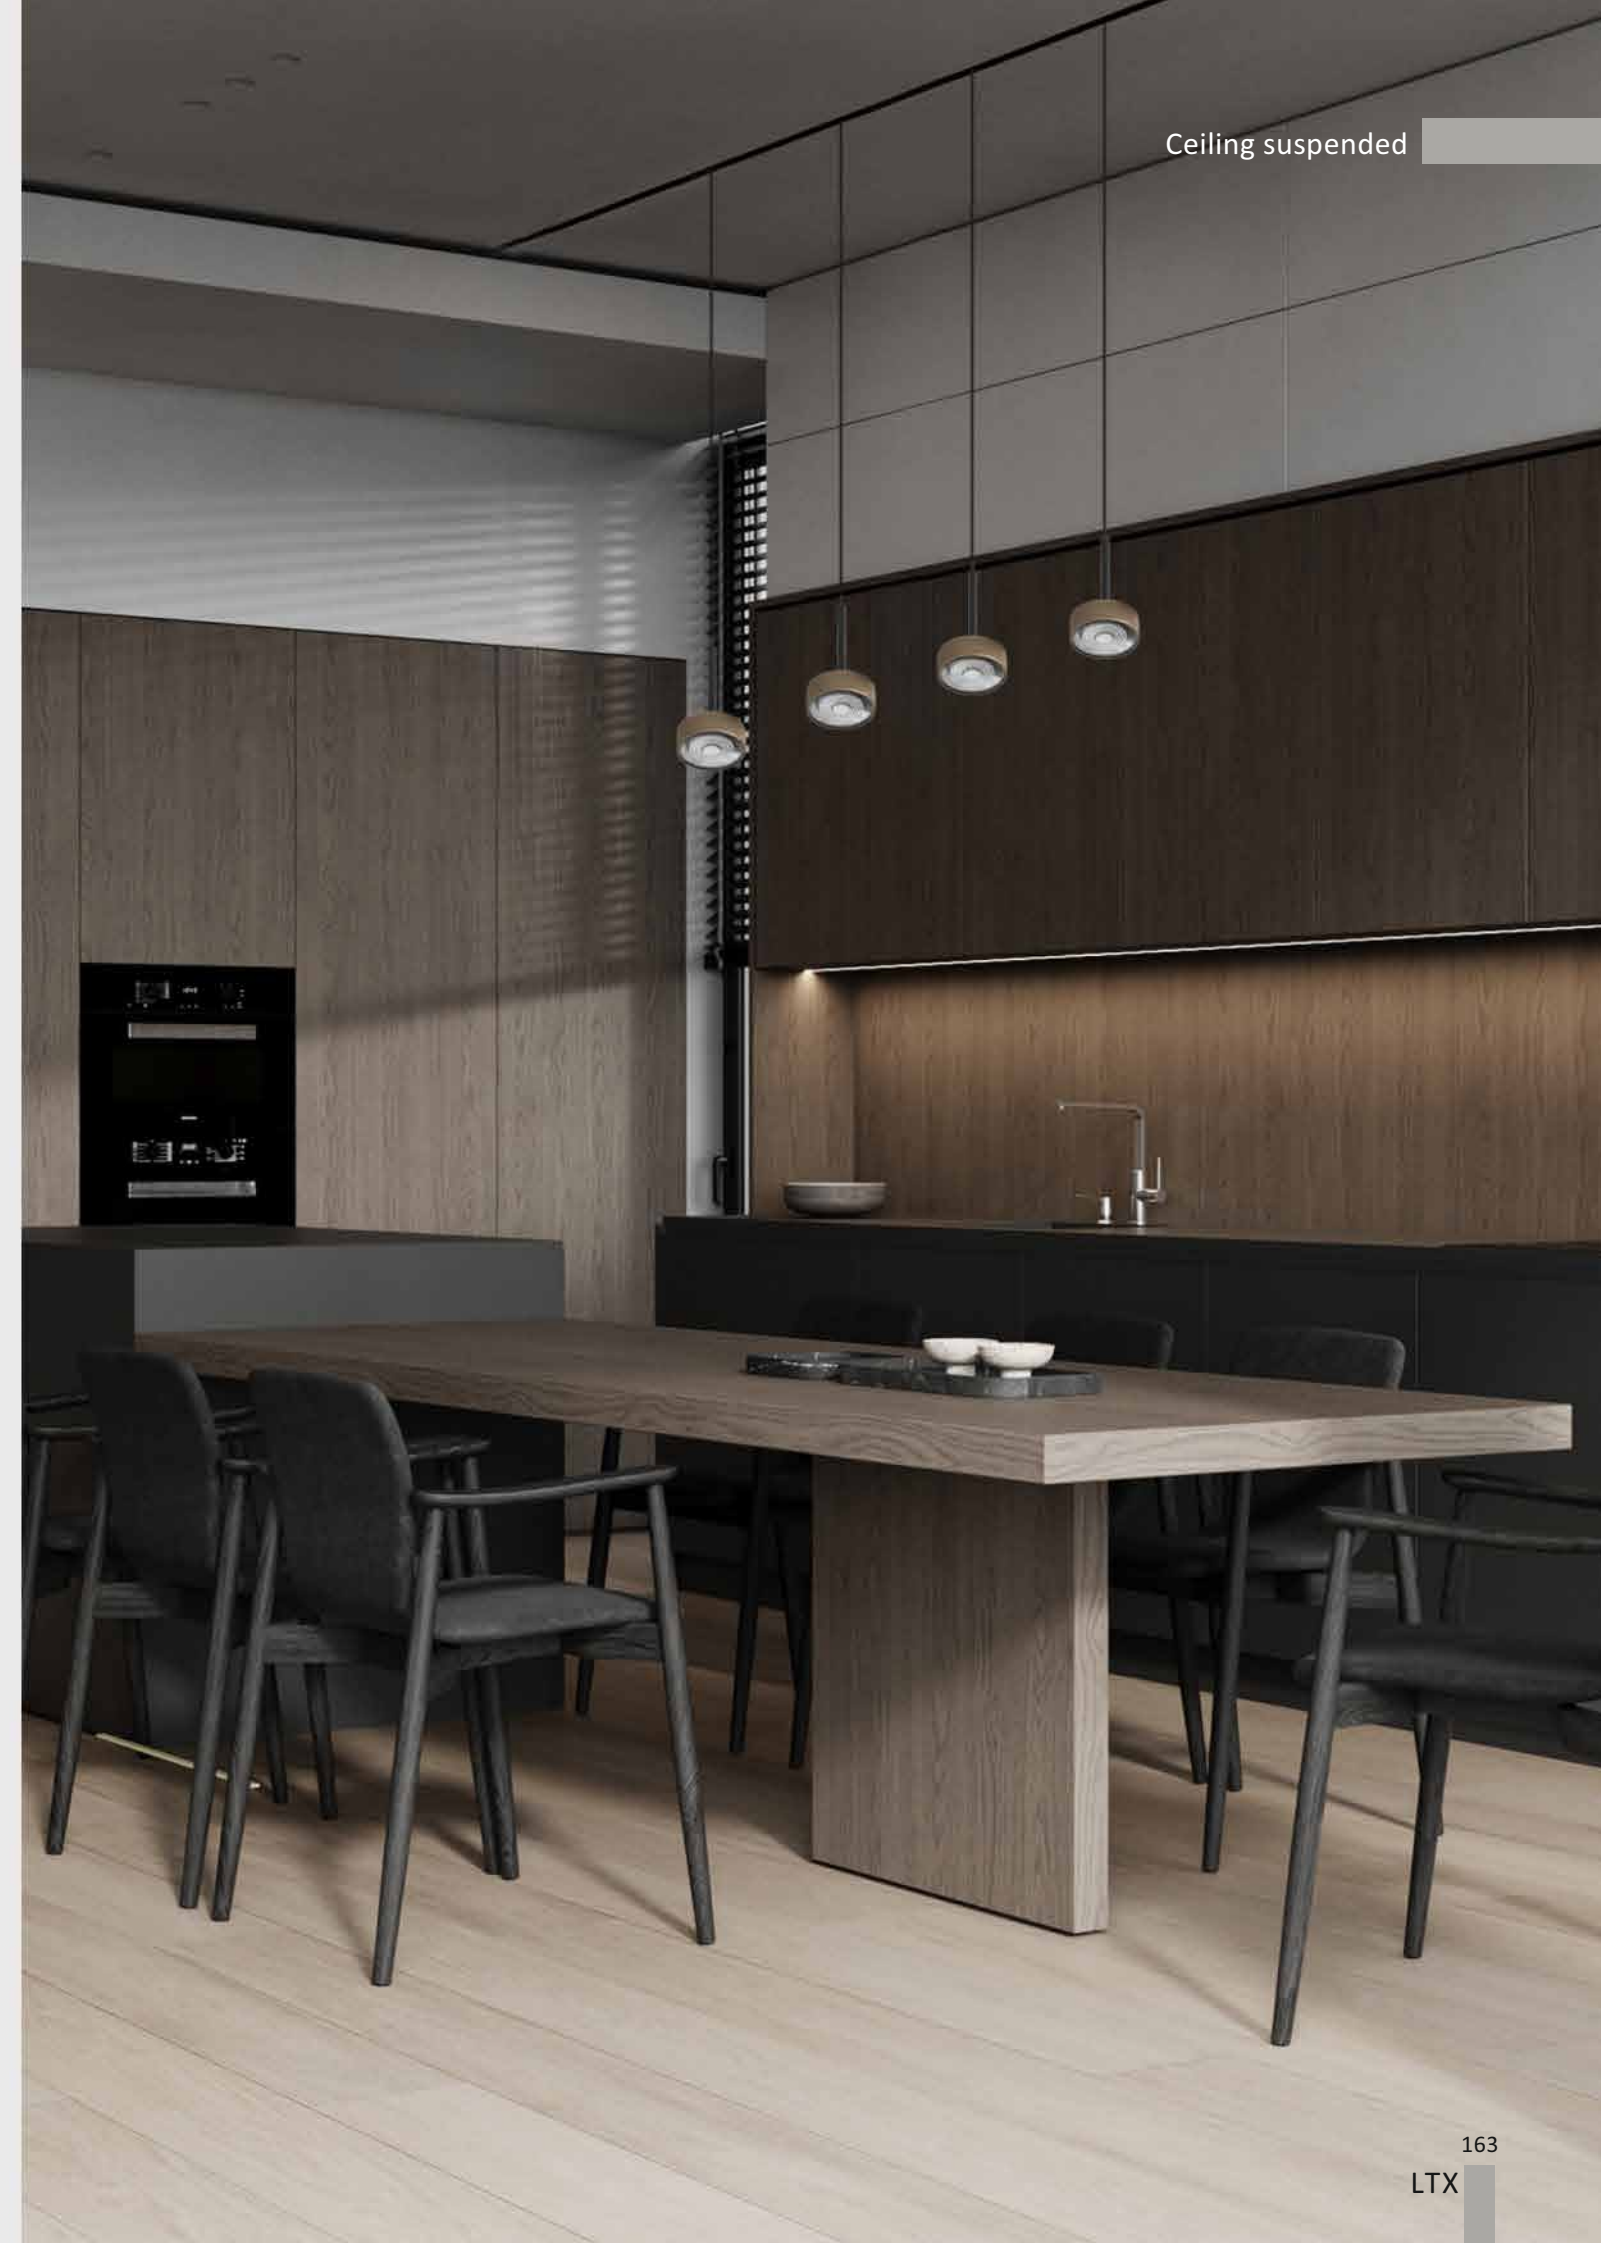

Ceiling suspended

SOL MINI P



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.7530.7.930.XX.***	7	3000	>90	700	610
03.7530.7.940.XX.***	7	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL PC

ⓘ » 497

Ceiling suspended

SOL MINI P NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.7531.7.930.XX.***	7	3000	>90	700	610
03.7531.7.940.XX.***	7	4000	>90	700	610


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497

SOL MINI P NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.7532.7.930.XX.***	7	3000	>90	700	610
03.7532.7.940.XX.***	7	4000	>90	700	610


ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC



ⓘ » 497

Color	Body	M RING
XX		
BK	BK ■ BK ■	
BK/BR	BK ■ BR ■	
BK/CP	BK ■ CP ■	
BK/CR	BK ■ CR ■	
BK/DB	BK ■ DB ■	
BK/WH	BK ■ WH □	
CHECK OTHER COLORS ON PAGE 494		
***	Options	
	ON/OFF	
DALI	DIM DALI	
PC	DIM PHASE CUT	

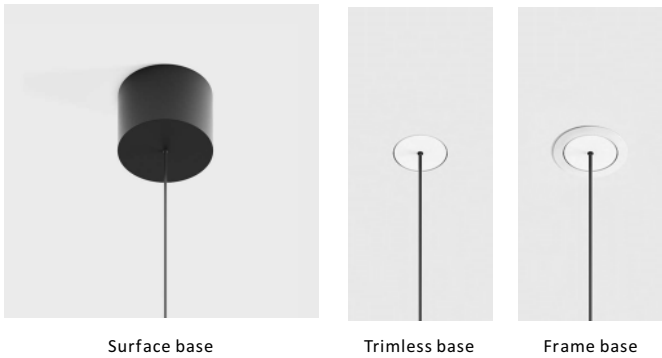

Ceiling suspended

SOL MINI P



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.7530.7.930.XX.***	7	3000	>90	700	610
03.7530.7.940.XX.***	7	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497


Color XX	Body	M RING GRAIN
BK/BKG	BK	BKG
BK/BRG	BK	BRG
BK/BZG	BK	BZG
BK/CFG	BK	CFG
BK/CPG	BK	CPG
BK/CRG	BK	CRG
BK/DBG	BK	DBG
BK/SBG	BK	SBG
BK/WHG	BK	WHG

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Ceiling suspended

SOL MINI P NANO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.7531.7.930.XX.***	7	3000	>90	700	610
03.7531.7.940.XX.***	7	4000	>90	700	610



ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497

SOL MINI P NANO




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
03.7532.7.930.XX.***	7	3000	>90	700	610
03.7532.7.940.XX.***	7	4000	>90	700	610

ⓘ DIM DALI/DIM PHASE CUT MUST BE PLACED ON REMOTE




MATERIAL | AL PC

ⓘ » 497

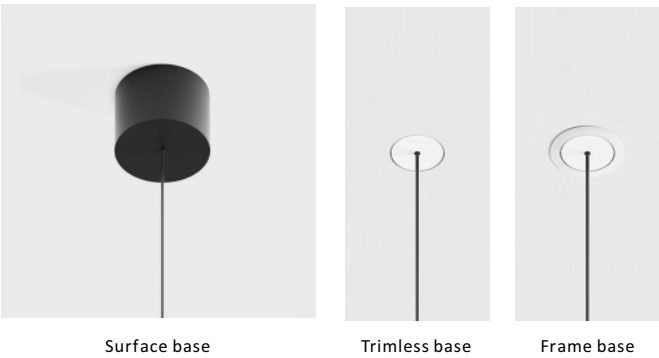

Ceiling suspended

SLIMLINE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1870.5.930.XX	5	3000	>90	48	400


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 497

SLIMLINE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1811.8.930.XX	8	3000	>90	48	640

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | BR PC

ⓘ » 497

Color	XX	Body
	BR	BR




Rotation luminary body

Ceiling suspended



Ceiling suspended

STRAW



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1570.5.930.XX	5	3000	>90	48	400
10.1570.5.940.XX	5	4000	>90	48	400


DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

» 497

STRAW



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
10.1511.10.930.XX	10	3000	>90	48	800
10.1511.10.940.XX	10	4000	>90	48	800


DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC


» 497

Color	Body
XX	
BK	BK
BR	BR

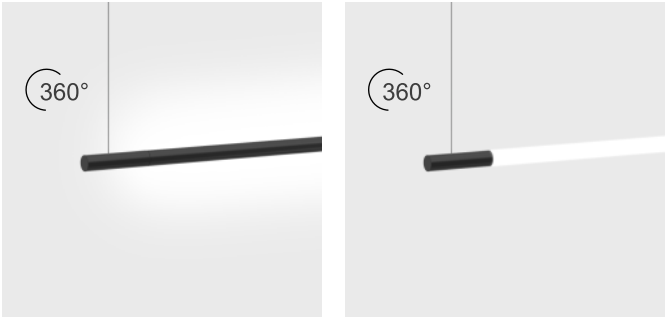


Rotation luminary body

Ceiling suspended

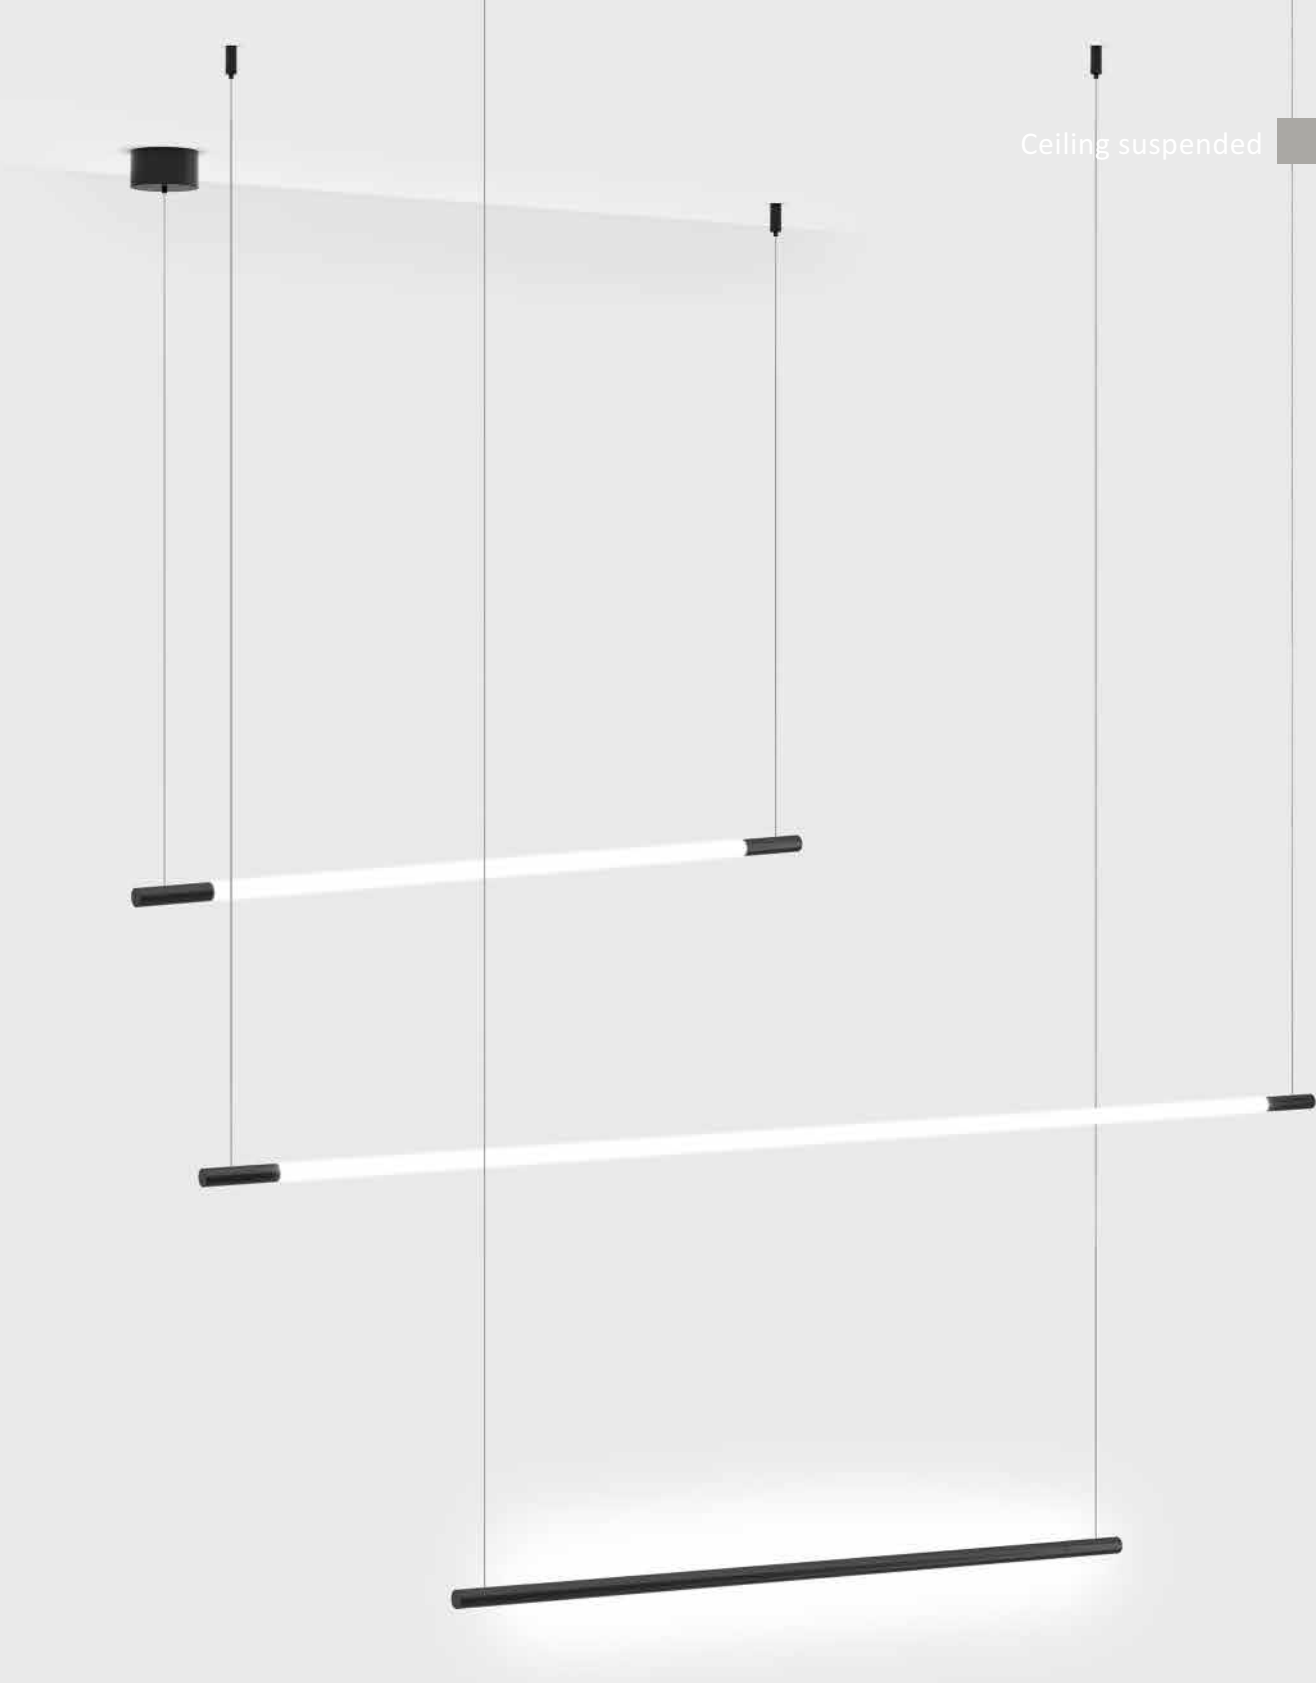

Ceiling suspended

OFFICE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
03.1610.12.930.XX	12	3000	>90	48	415
03.1610.12.940.XX	12	4000	>90	48	415


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497

OFFICE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
03.1620.24.930.XX	24	3000	>90	48	972
03.1620.24.940.XX	24	4000	>90	48	972

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497


Color	XX	Body
BK	BK	■

OTHER COLORS TEMPERATURE ON REQUEST

Ceiling suspended



SNAKE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
25YY.3210.24.930.XX.***	24	3000	>90	24	1500
25YY.3210.24.940.XX.***	24	4000	>90	24	1500


ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497

SNAKE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
25YY.3210.40.930.XX.***	40	3000	>90	24	2000
25YY.3210.40.940.XX.***	40	4000	>90	24	2000

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497

Color	YY	Mesh
B	BK	■
W	WH	□

Color	XX	Body
BK	BK	■
BR	BR	■
BZ	BZ	■
WH	WH	□

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT



Black




Brass



Bronze

SNAKE



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
25YY.3210.80.930.XX.***	80	3000	>90	24	4000
25YY.3210.80.940.XX.***	80	4000	>90	24	4000

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

ⓘ » 497


Color	YY	Mesh
B	BK	■
W	WH	□

Color	XX	Body
BK	BK	■
BR	BR	■
BZ	BZ	■
WH	WH	□

***	Options
	ON/OFF
DALI	DIM DALI
PC	DIM PHASE CUT




25W.3210.24.930.BK




25W.3210.24.930.BR



25B.3210.24.930.BK



25W.3210.40.930.BK




25W.3210.40.930.BR




25B.3210.24.930.BZ



25W.3210.80.930.BK



25W.3210.80.930.BR




25B.3210.80.930.BR

Ceiling suspended

POINTER SUSP BASE



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.1301.6.930.XX	4x5,4	3000	>90	700	4x137



MATERIAL | AL


i » 497

POINTER SUSP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.1300.6.930.XX	4x5,4	3000	>90	700	4x137

i DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL

i » 497

ACCESSORIES

Ø68 Ø35	Trimless white	01.A39TRLS.P.WH
Ø39	Trimless black	01.A39TRLS.P.BK
Ø48 Ø42	Frame white	01.A39FRM.P.WH
	Frame black	01.A39FRM.P.BK

Color	Body	Spot
XX	BK	CG
BK/CG	BK	CG



10.1301.6.930.BK/CG



01.A39TRLS.P.WH




01.A39FRM.S.P.WH


Ceiling suspended



POINTER FLOOR



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
10.1800.6.930.XX	6	3000	>90	180	137




MATERIAL | AL

i » 497

Color	Body	Spot
XX	BK	■
BK/CG	BK	■
	CG	■




MOON




Code	Power Watt	Color T (K)	CRI	Battery
10.3512.02.TW.XX	2	2200-5000	>90	3,7V 4500mAh

i 5V ADAPTER (NOT INCLUDED)



MATERIAL | AL

i » 497

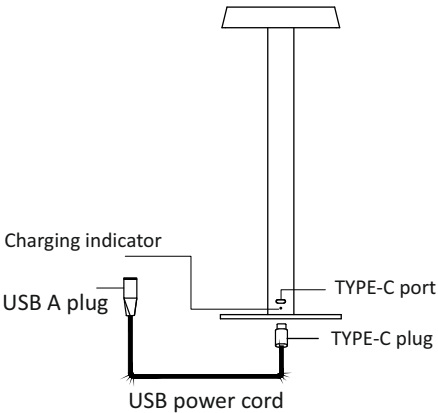

Color	Body
XX	
BK	BK ■
WH	WH □




10.3512.02.TW.BK



10.3512.02.TW.WH



MINI_LINE 42V TRACK SYSTEM

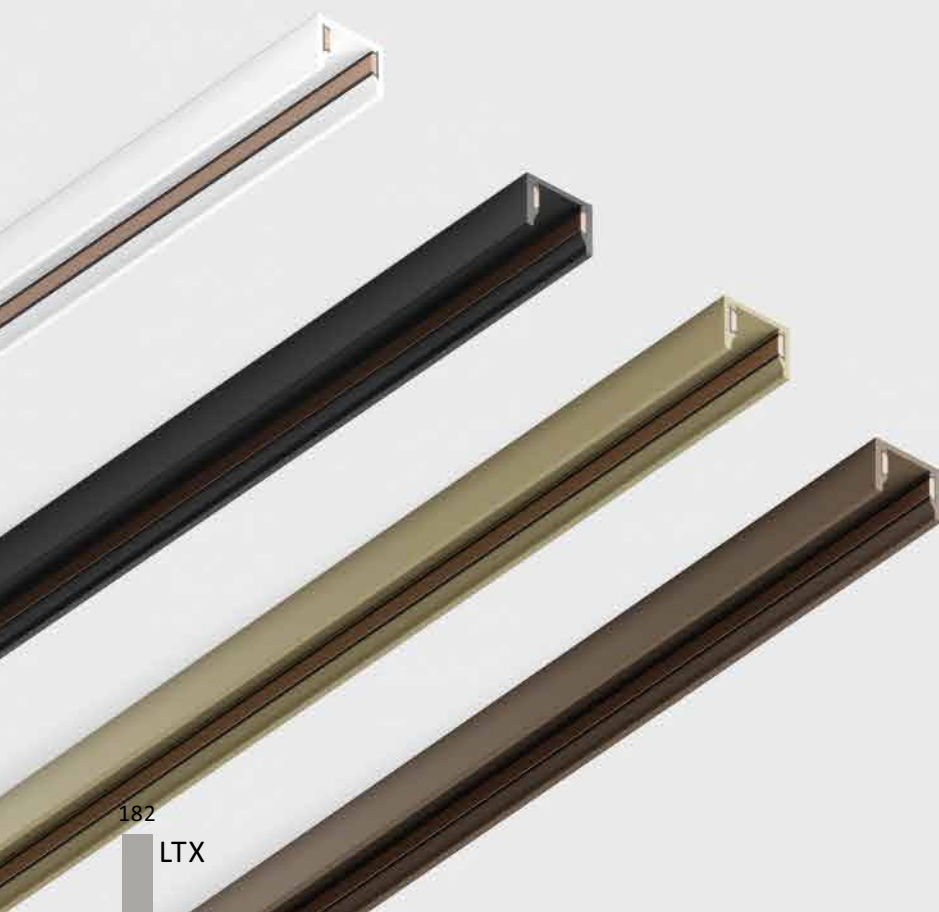

182



LTX



183

LTX

MINI_LINE 42 TRACK R




MATERIAL | AL

	Code	Dimensions (mm): LxWxH	Color
Recessed track	07.R200.WH	2000 x 49x 13	White
(End caps 2pcs included)	07.R200.BK	2000 x 49 x 13	Black

» 497

MINI_LINE 42 MEC JOINT




MATERIAL | AL

	Code	Color
Mechanical linear connector for track	07.R/SLNCON.WH	White
	07.R/SLNCON.BK	Black

» 497


MINI_LINE 42 END CAP S




MATERIAL | PC

	Code	Color
End cap for surface track	07.R/SECAP.WH	White
2 pcs/set	07.R/SECAP.BK	Black

» 497

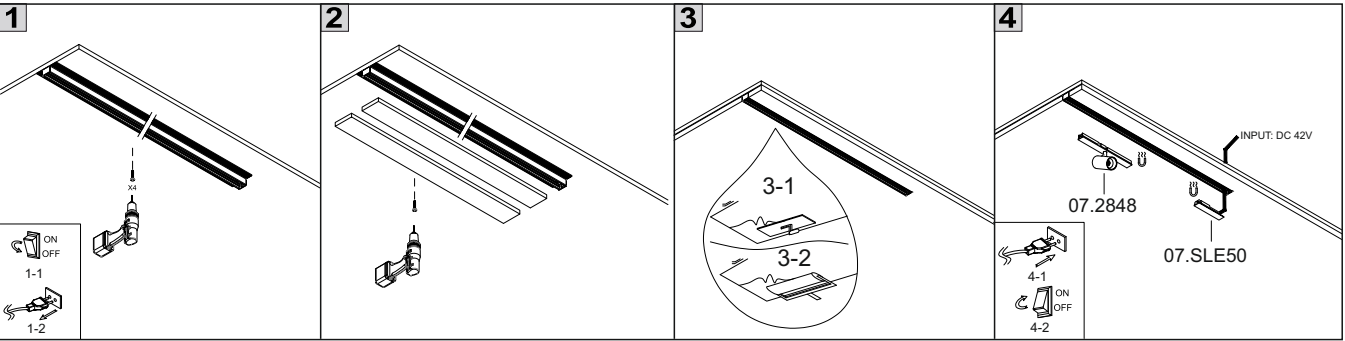

MINI_LINE 42 TRACK S




CE IP20 42V

MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Surface track (End caps 2pcs included)	07.S300.WH	3000 x 19 x 13,5	White
	07.S300.BK	3000 x 19 x 13,5	Black

MINI_LINE 42 TRACK S



CE IP20 42V

MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Surface track (End caps 2pcs included)	07.S200.LG	2000 x 19 x 13,5	Like gold
	07.S200.LB	2000 x 19 x 13,5	Like brass

MINI_LINE 42 MEC JOINT



CE IP20

MATERIAL | AL

» 497

	Code	Color
Mechanical linear connector for track	07.R/SLNCON.WH	White
	07.R/SLNCON.BK	Black

MINI_LINE 42 END CAP S




CE IP20

MATERIAL | PC

» 497

	Code	Color
End cap for surface track 2 pcs/set	07.R/SECAP.WH	White
	07.R/SECAP.BK	Black
	07.SECAP.LG	Like gold
	07.SECAP.LB	Like brass

MINI_LINE 42 CORNER S HR




CE IP20 42V

MATERIAL | AL

» 497

	Code	Color
Surface «L» track connector	07.S90HR.WH	White
	07.S90HR.BK	Black
	07.S90HR.LG	Like gold
	07.S90HR.LB	Like brass

MINI_LINE 42 CORNER S IN



CE IP20 42V

MATERIAL | AL

» 497

	Code	Color
Surface «L» connector Ceiling to Wall in-installation	07.S90IN.WH	White
	07.S90IN.BK	Black

MINI_LINE 42 CORNER S OUT




CE IP20 42V

MATERIAL | AL

» 497

	Code	Color
Surface «L» track connector Wall to Wall out-installation	07.S90OUT.WH	White
	07.S90OUT.BK	Black

MINI_LINE ARC S HR




CE IP20 42V

MATERIAL | AL

» 497

	Code	Color
Surface radial corner, 90° R300mm	07.SC30HR.WH	White
	07.SC30HR.BK	Black

MINI_LINE ARC S HR




CE IP20 42V

MATERIAL | AL

» 497

	Code	Color
Surface radial corner, 90° R500mm	07.SC50HR.WH	White
	07.SC50HR.BK	Black

MINI_LINE ARC S IN




CE IP20 42V

MATERIAL | AL

» 497

	Code	Color
Surface radial corner, 90° R300mm, ceiling to wall in-installation	07.SC30IN.WH	White
	07.SC30IN.BK	Black

MINI_LINE ARC S IN




CE IP20 42V

MATERIAL | AL


» 497

	Code	Color
Surface radial corner, 90° R500mm, ceiling to wall in-installation	07.SC50IN.WH	White
	07.SC50IN.BK	Black


INSTALLATION SURFACE
TRACK SYSTEM MINI_LINE 42
WITH CORNER RADIAL R300

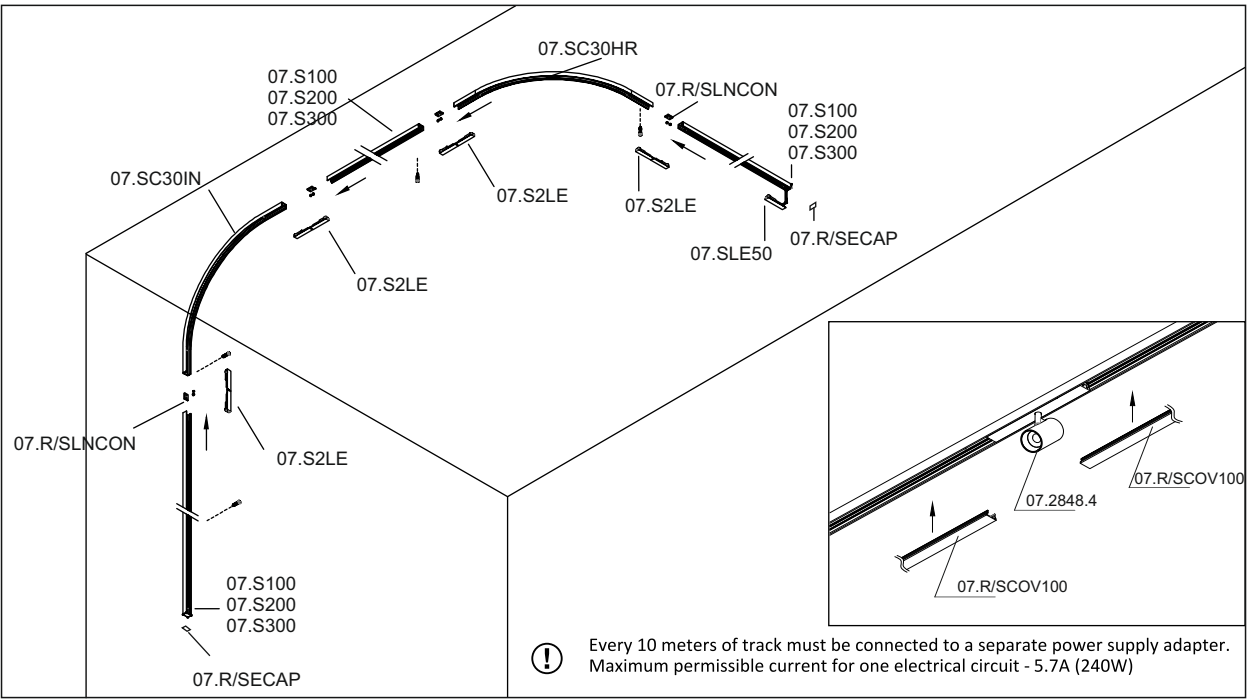

INSTALLATION SURFACE
TRACK SYSTEM MINI_LINE 42
WITH CORNER RADIAL R500

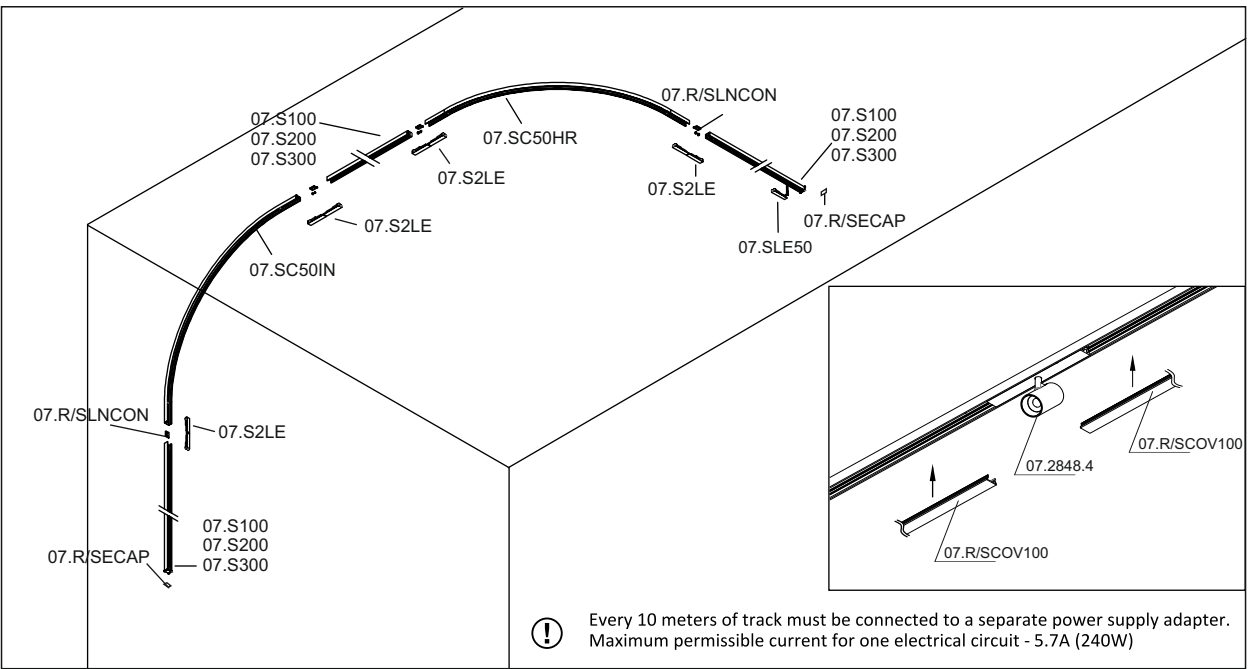

MINI_LINE 42 ELECTRICAL JOINT FLEX




CE IP20 42V

MATERIAL | AL

	Code	Color
Electrical joint flex connector for tack	07.S2LE.WH	White
	07.S2LE.BK	Black

» 497

MINI_LINE 42 LIVE END 500




CE IP20 42V

MATERIAL | AL

	Code	Color
Feed cable, L 300mm	07.SLE50.WH	White
	07.SLE50.BK	Black

» 497

MINI_LINE 42 COVER R/S




CE IP20

MATERIAL | PC

	Code	Dimensions (mm): LxWxH	Color
Track cover for surface	07.R/SCOV100.WH	1000 x 15,4 x 8	White
	07.R/SCOV100.BK	1000 x 15,4 x 8	Black

» 497


INSTALLATION SURFACE
TRACK SYSTEM MINI_LINE 42

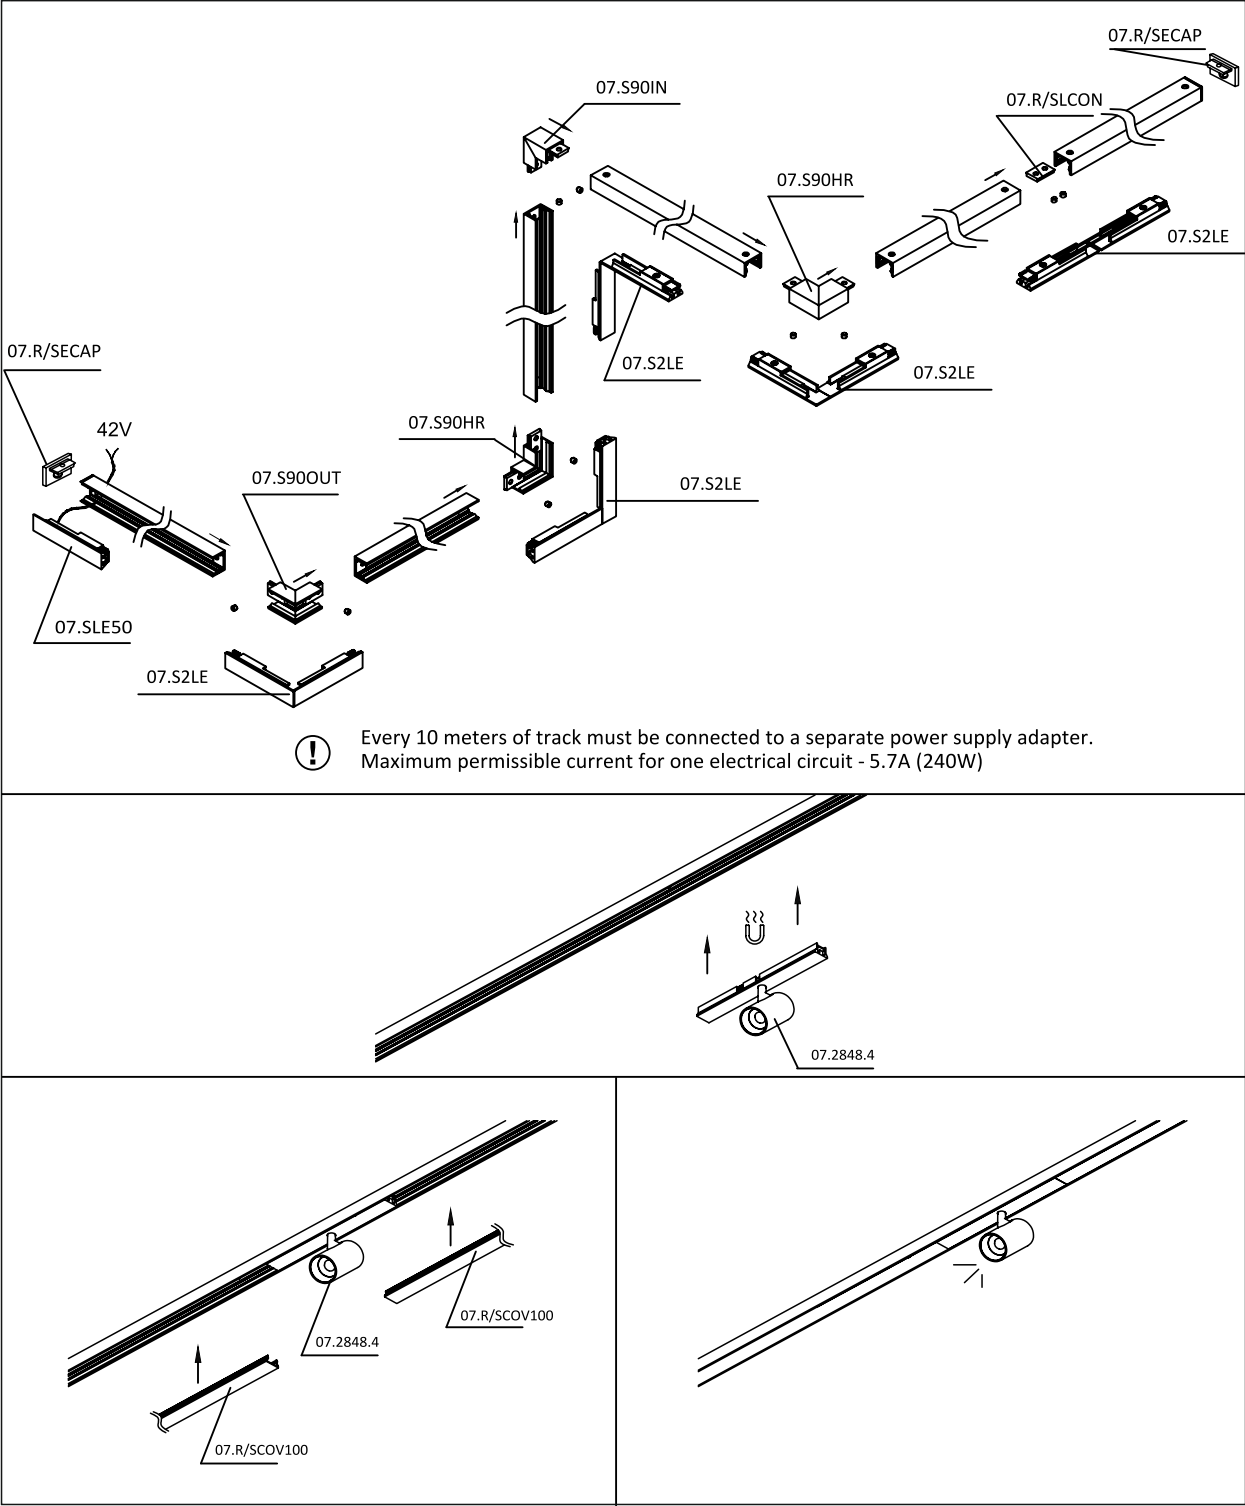

MINI_LINE 42 LINEA 300



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.3000.6.930.XX	6	3000	>90	395
07.3000.6.940.XX	6	4000	>90	395



LED CE IP20 42V EXCL DIFFUSED 0-10V DIM


MATERIAL | AL PC

» 497

MINI_LINE 42 LINEA 600



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.6000.12.930.XX	12	3000	>90	790
07.6000.12.940.XX	12	4000	>90	790



LED CE IP20 42V EXCL DIFFUSED 0-10V DIM

MATERIAL | AL PC

» 497

Color	Body
XX	
BK	
WH	



07.3000.6.930.WH




07.3000.6.930.BK

MINI_LINE 42 LINEA 900



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.9000.18.930.XX	18	3000	>90	1185
07.9000.18.940.XX	18	4000	>90	1185




LED CE IP20 42V EXCL DIFFUSED 0-10V DIM


MATERIAL | AL PC

» 497

MINI_LINE 42 LINEA 1200



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.1200.24.930.XX	24	3000	>90	1580
07.1200.24.940.XX	24	4000	>90	1580



LED CE IP20 42V EXCL DIFFUSED 0-10V DIM

MATERIAL | AL PC


» 497

Color	Body
XX	
BK	
WH	

MINI_LINE 42 COMFORT 300



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.3001.4.930. XX	4	3000	>90	390
07.3001.4.940. XX	4	4000	>90	390



LED

CE

IP20

42V

0-10V DIM


MATERIAL | AL PC

» 497

MINI_LINE 42 COMFORT 600



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.6001.8.930. XX	8	3000	>90	780
07.6001.8.940. XX	8	4000	>90	780



LED

CE

IP20

42V

0-10V DIM

MATERIAL | AL PC

» 497

Color	Body
XX	
BK	
WH	




07.3001.4.930.WH 07.3001.4.930.BK



MINI_LINE 42 TUB XS A



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.2848.4.930.XX	3,5	3000	>90	426
07.2848.4.940.XX	3,5	4000	>90	426



LEDCE

IP20

42V

EXCL

36°

Tilt

Rotate

0-10V DIM

MATERIAL |

AL

PC


i

» 497

MINI_LINE 42 TUB XS A X2



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.2848.7.930.XX	2 x 3,5	3000	>90	2 x 426
07.2848.7.940.XX	2 x 3,5	4000	>90	2 x 426



LEDCE

IP20

42V

EXCL

2x36°

Tilt

Rotate

0-10V DIM

MATERIAL |

AL

PC

i

» 497

Color	Body	Adapter
XX		
BK	BK BK	
WH	WH WH	



07.2848.7.930.WH




07.2848.7.930.BK



MINI_LINE 42 TUB S A



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.3270.5.930.XX	5	3000	>90	642
07.3270.5.940.XX	5	4000	>90	642



LED

CE

42V

EXCL

0-10V DIM


MATERIAL | AL PC

» 497

MINI_LINE 42 TUB S A X2



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.3270.10.930.XX	2 x 5	3000	>90	2 x 642
07.3270.10.940.XX	2 x 5	4000	>90	2 x 642



LED

CE

42V

EXCL

0-10V DIM

MATERIAL | AL PC

» 497

Color	Body	Adapter
XX		
BK	BK BK	
BR	BR BK	
CR	CR BK	
WH	WH WH	



07.3270.5.930.BK



07.3270.5.930.BR



07.3270.10.930.BK



07.3270.5.930.CR




07.3270.5.930.WH



07.3270.10.930.WH



MINI_LINE 42 TUB OUT



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.0349.4.930.XX	3,5	3000	>90	265
07.0349.4.940.XX	3,5	4000	>90	265

LEDCE

IP20

42V

EXCL

36°

Tilt

Rotate

0-10V DIM

MATERIAL |


AL

PC

i

» 497

MINI_LINE 42 TUB OUT



Code	Power Watt	Color T (K)	CRI	Product Lumen
07.2349.7.930.XX	2 x 3,5	3000	>90	2 x 265
07.2349.7.940.XX	2 x 3,5	4000	>90	2 x 265

LEDCE

IP20

42V

EXCL

2x36°

Tilt

Rotate

0-10V DIM

MATERIAL |

AL

PC


i

» 497


Color	Body	Adapter
XX		
BK	BK BK	BK
BR	BR BK	BK
WH	WH WH	WH



IN-LINE TRACK SYSTEM

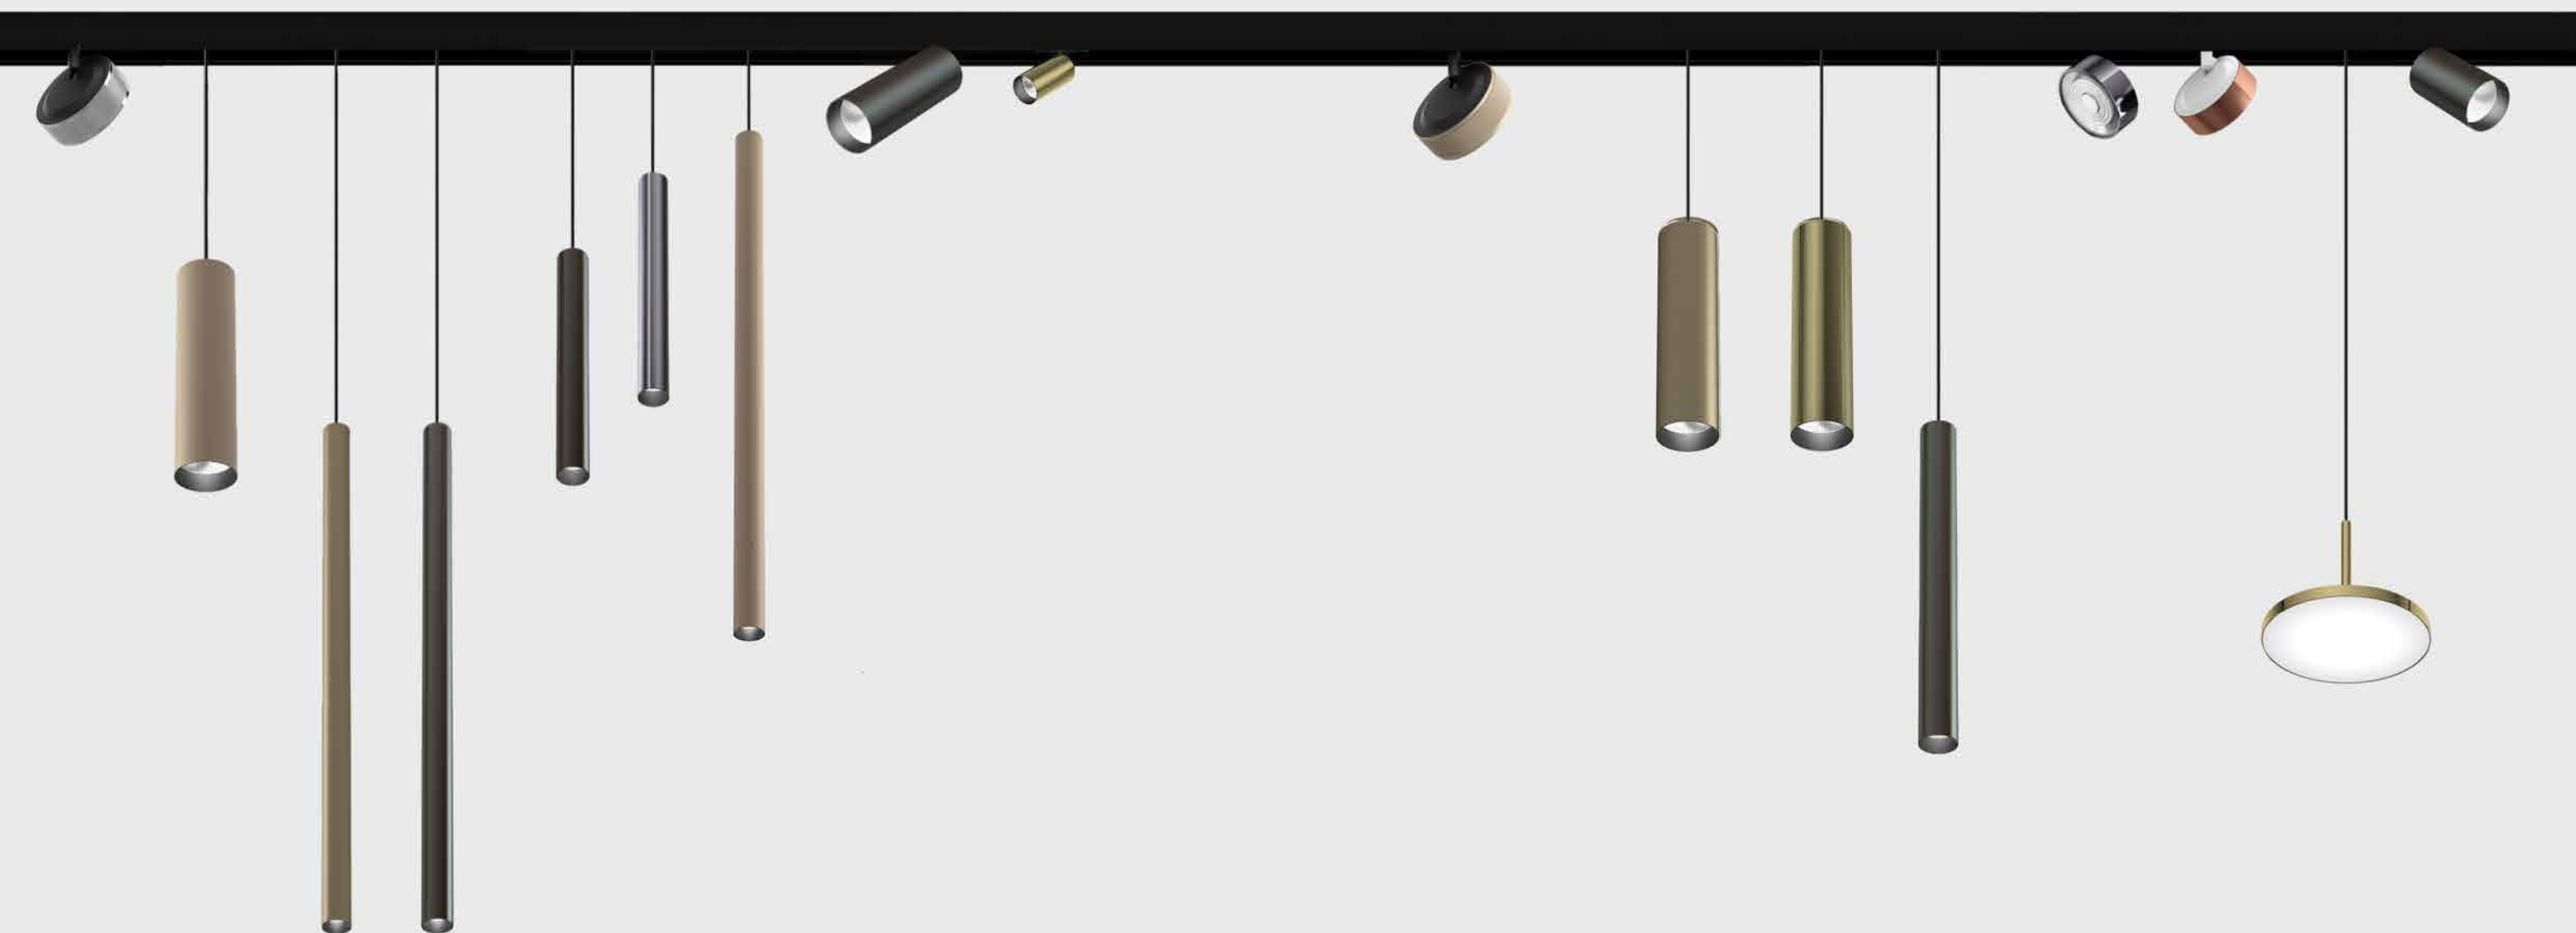

IN_LINE TRACK T



CE IP20 48V


EXCL 80

MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Recessed track with trim, 4 wired, (mounting bracket 06.TCB included)	06.T200.WH.4x	2000 x 40 x 54	White
	06.T200.BK.4x	2000 x 40 x 54	Black
	06.T300.WH.4x	3000 x 40 x 54	White
	06.T300.BK.4x	3000 x 40 x 54	Black

IN_LINE CORNER T HR




CE IP20 48V

MATERIAL | AL

» 497

	Code	Color
Recessed «L» track connector with trim (2 pcs 06.TLNCON included)	06.T90HR.BK	Black
	06.T90HR.WH	White

IN_LINE END CAP T




CE IP20

MATERIAL | AL

» 497

	Code	Color
End cap for recessed track T 2 pcs/set	06.R90IN.WH	White
	06.R90IN.BK	Black

IN_LINE MEC JOINT



IP20

MATERIAL | INOX

» 497

	Code	Color
Mechanical linear connector for track IN_LINE TRACK T	06.TLNCON	Black

MOUNTING BRACKET






IP20

MATERIAL | INOX

» 497

	Code	Color
Mounting bracket for track IN_LINE TRACK T	06.TCB.BK	Black

IN_LINE TRACK R





MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Recessed track, 4 wired	06.R200.WH.4x	2000 x 76 x 54	White
	06.R200.BK.4x	2000 x 76 x 54	Black
	06.R300.WH.4x	3000 x 76 x 54	White
	06.R300.BK.4x	3000 x 76 x 54	Black

IN_LINE CORNER R HR





MATERIAL | AL

» 497

	Code	Color
Recessed «L» track connector (8 pcs 06.R/SLNCON included)	06.R90HR.WH	White
	06.R90HR.BK	Black

IN_LINE CORNER R IN




MATERIAL | AL

» 497

	Code	Color
Recessed «L» connector Ceiling to Wall, in-installation (8 pcs 06.R/SLNCON included)	06.R90IN.WH	White
	06.R90IN.BK	Black

IN_LINE CORNER R OUT




MATERIAL | AL

» 497


	Code	Color
Recessed «L» track connector Wall to Wall out-installation (8 pcs 06.R/SLNCON included)	06.R90OUT.WH	White
	06.R90OUT.BK	Black



IN_LINE RADIAL CORNER




	Code	Color
Recessed radial corner track (4 pcs 06.RCCON included)	06.RC50.WH	White
	06.RC50.BK	Black



CE IP20 48V EXCL
MATERIAL | AL

» 497

IN_LINE ELECTRICAL JOINT FLEX




	Code	Color
Electrical joint flex connector for tack	06.S2RC.WH	White
	06.S2RC.BK	Black



CE IP20 48V
MATERIAL | PC

» 497


IN_LINE TRACKSYSTEM
RECESSED RADIAL CORNER INSTALLATION

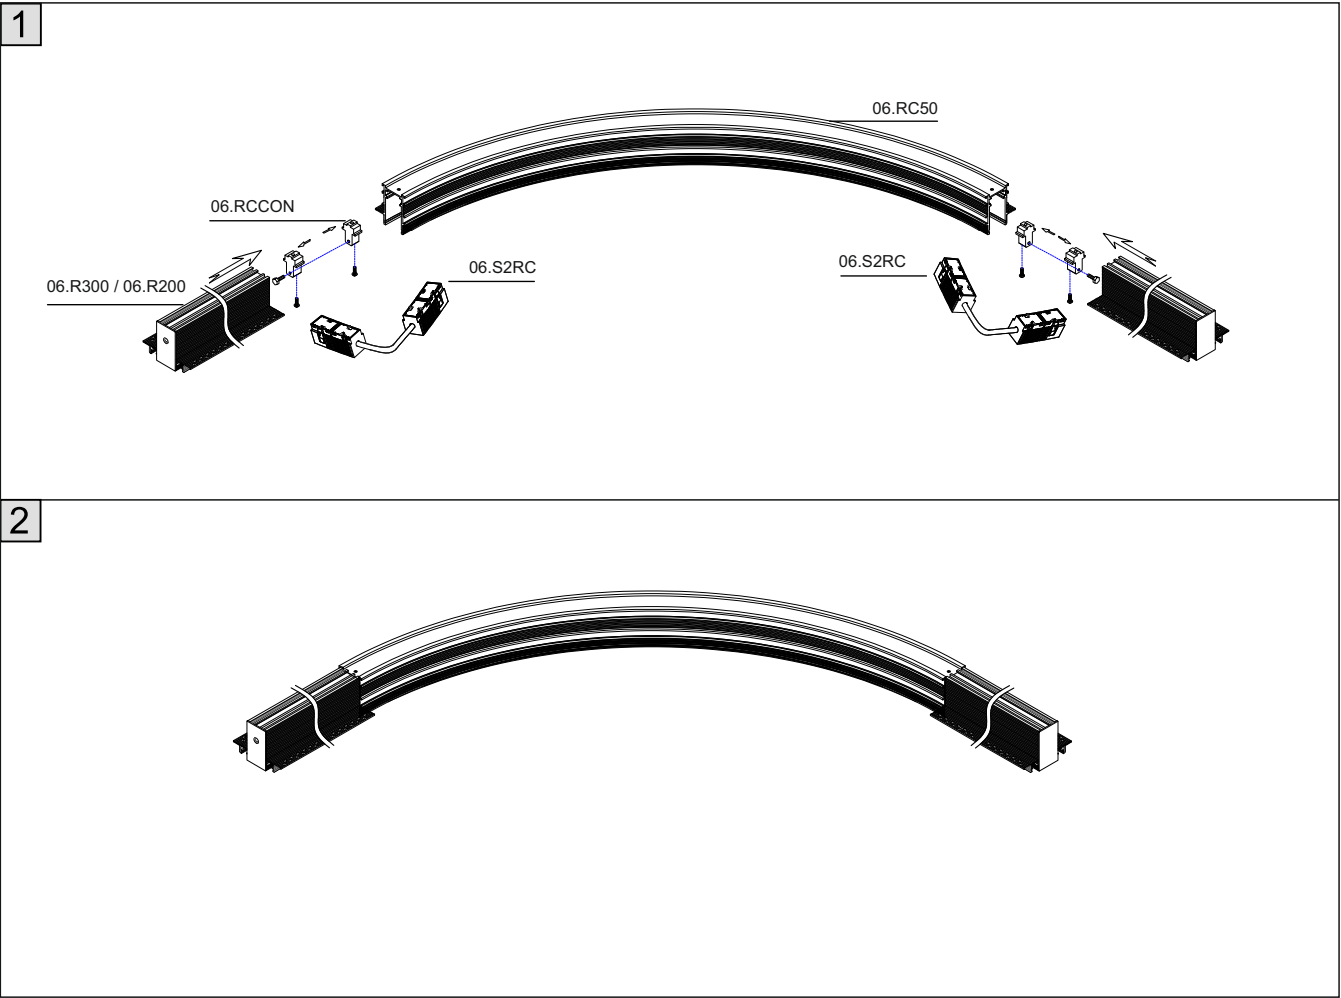

IN_LINE TRACK S



	Code	Dimensions (mm): LxWxH	Color
Surface / Suspension track, 4 wired	06.S200.WH.4x	2000 x 30 x 54	White
	06.S200.BK.4x	2000 x 30 x 54	Black
	06.S200.BR.4x	2000 x 30 x 54	Brush brass
	06.S200.MN.4x	2000 x 30 x 54	Midnight
	06.S300.WH.4x	3000 x 30 x 54	White
	06.S300.BK.4x	3000 x 30 x 54	Black




CE ENEC IP20 48V EXCL

MATERIAL | AL

i » 497

IN_LINE END CAP R/S




	Code	Color
End cap for Recessed & Surface 2 pcs/set	06.R/SECAP.WH	White
	06.R/SECAP.BK	Black
	06.R/SECAP.BR	Brush brass
	06.R/SECAP.MN	Midnight





CE ENEC IP20

MATERIAL | PC

i » 497

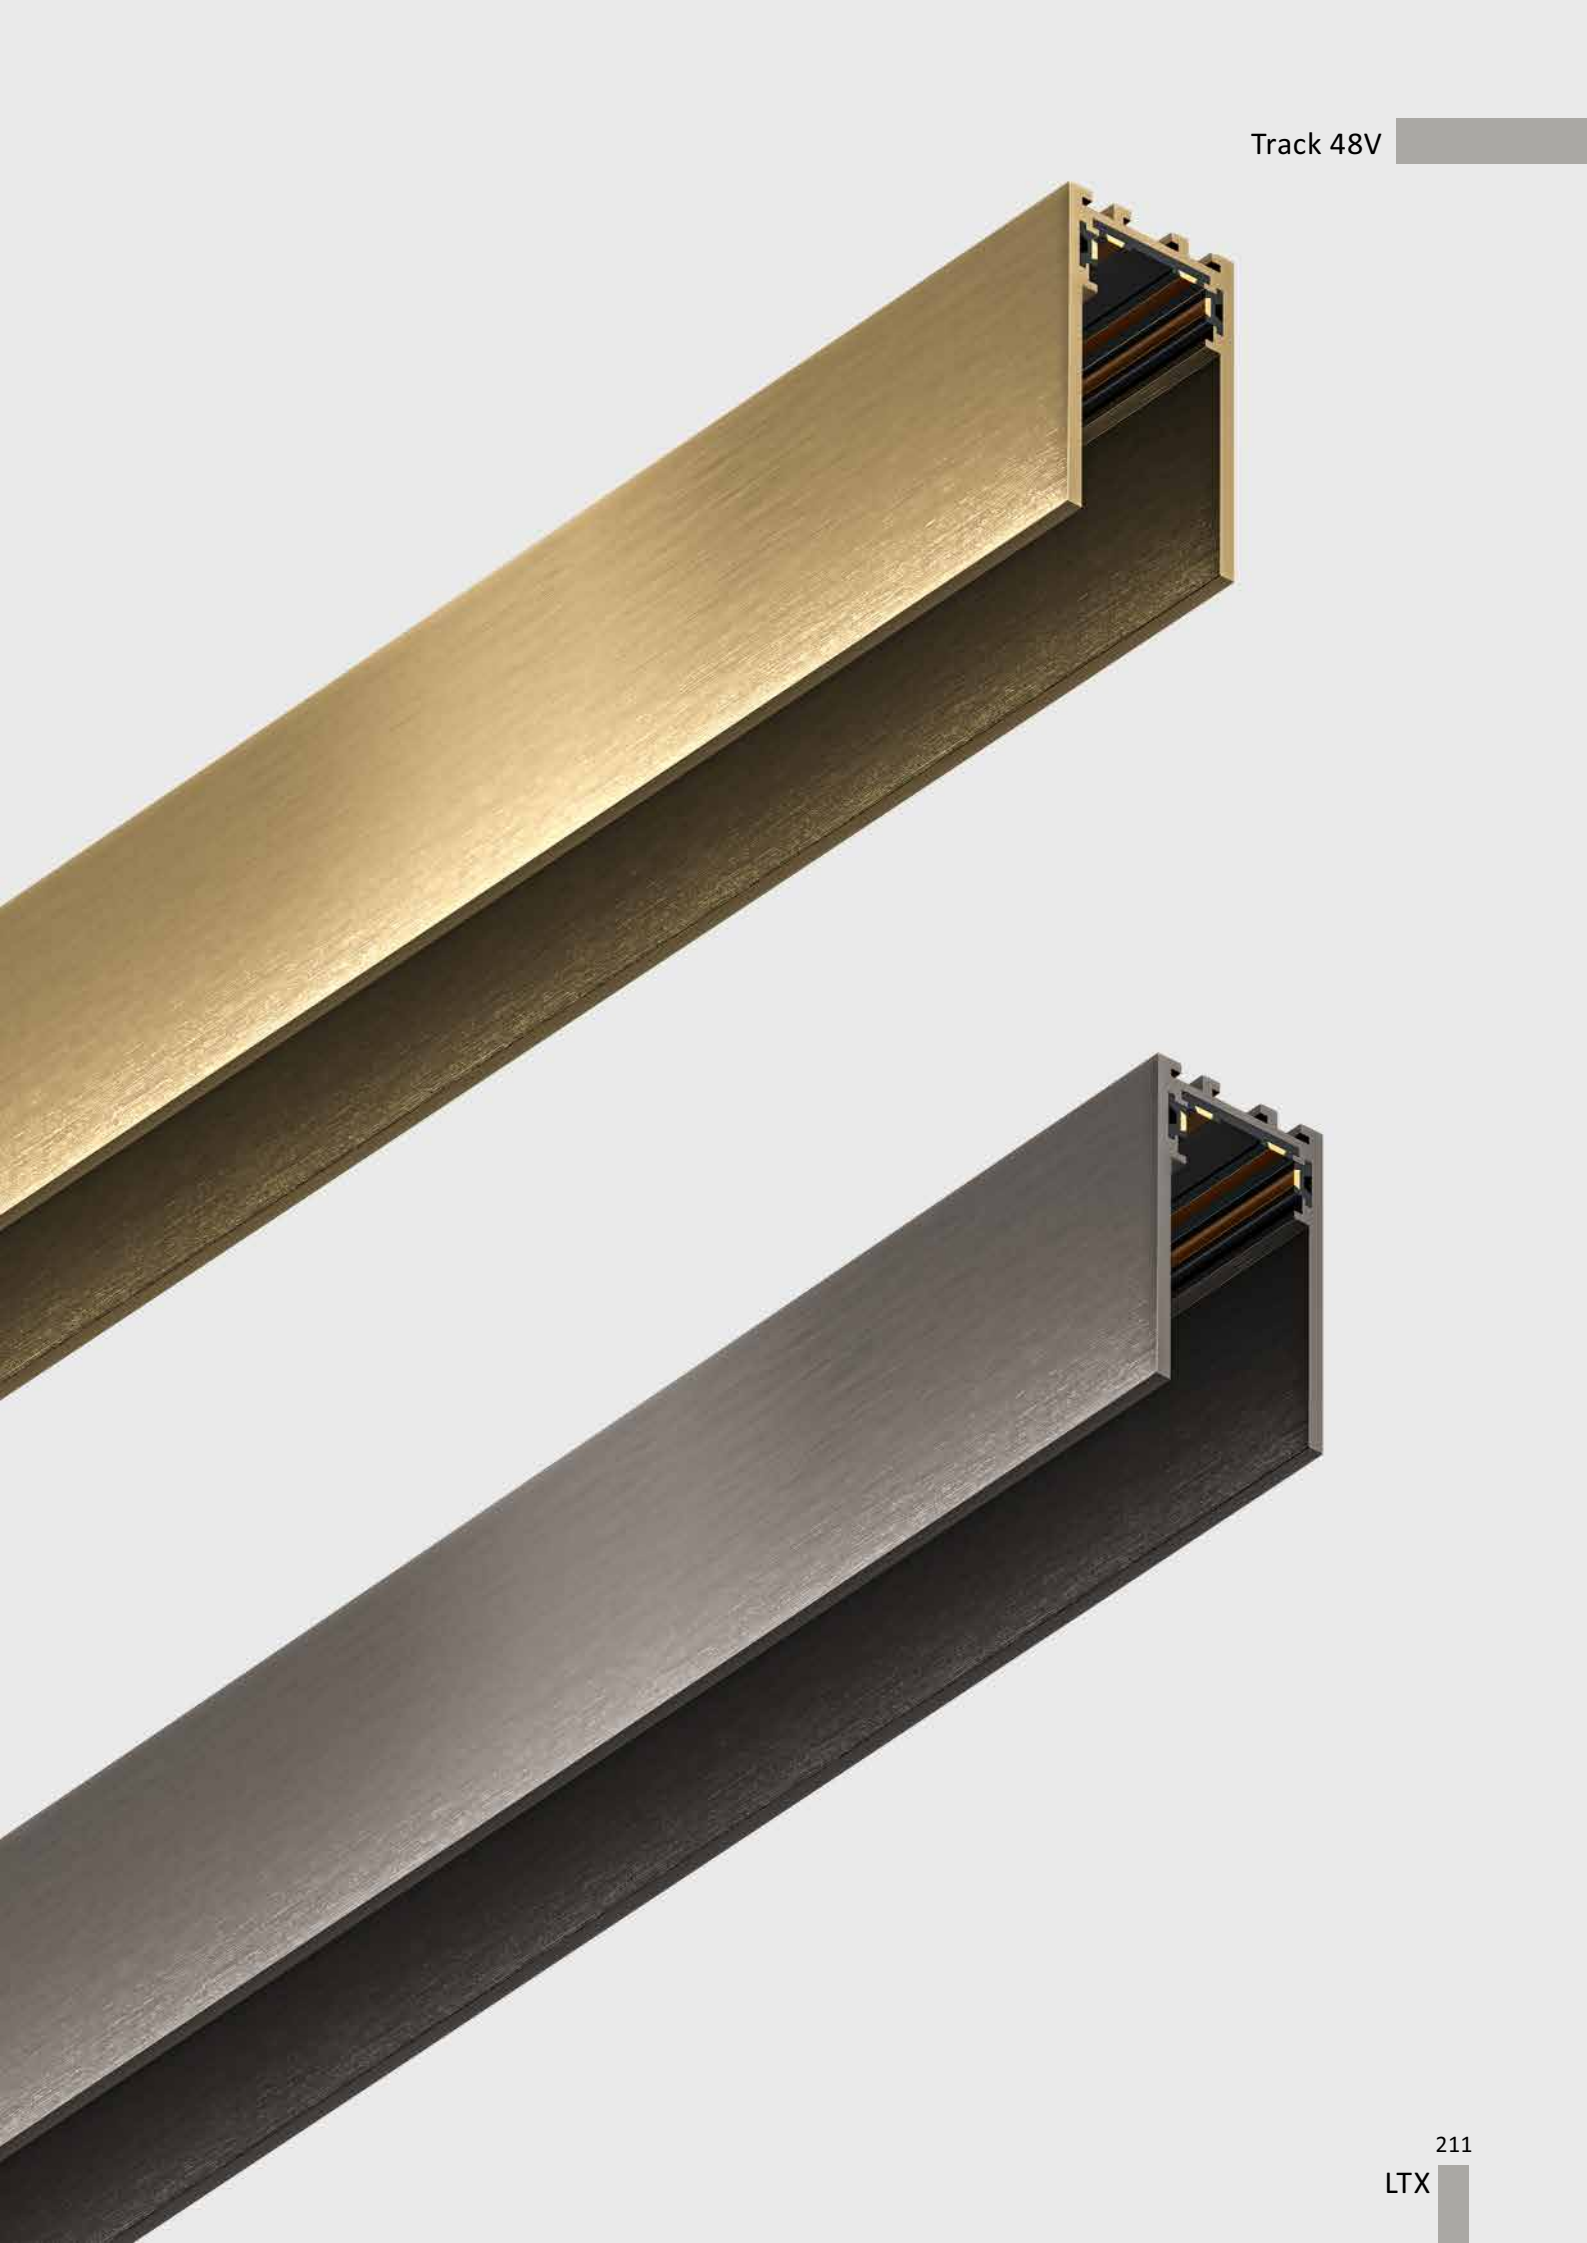

IN_LINE CORNER S HR





CE IP20 48V
MATERIAL | AL

	Code	Color
Surface/suspension «L» track connector	06.S90HR.WH	White
(2 pcs 06.R/SLNCON included)	06.S90HR.BK	Black

» 497

IN_LINE CORNER S IN




CE IP20 48V
MATERIAL | AL

	Code	Color
Surface «L» track connector	06.S90IN.WH	White
Ceiling to Wall in – installation	06.S90IN.BK	Black
(2 pcs 06.R/SLNCON included)		

» 497

IN_LINE CORNER S OUT




CE IP20 48V
MATERIAL | AL

	Code	Color
Surface «L» track connector –	06.S90OUT.WH	White
Wall to Wall out – installation	06.S90OUT.BK	Black
(2 pcs 06.R/SLNCON included)		


» 497



IN_LINE RADIAL CORNER S




	Code	Color
Surface radial corner track, 4 wired	06.SC50.WH	White
(4 pcs 06.SCCON included)	06.SC50.BK	Black



CE IP20 48V
MATERIAL | AL

» 497

IN_LINE ELECTRICAL JOINT FLEX




	Code	Color
Electrical joint flex connector for track	06.S2RC.WH	White
	06.S2RC.BK	Black


CE IP20 48V
MATERIAL | PC

» 497

IN_LINE TRACKSYSTEM
SURFACE/SUSPENDED
RADIAL CORNER INSTALLATION

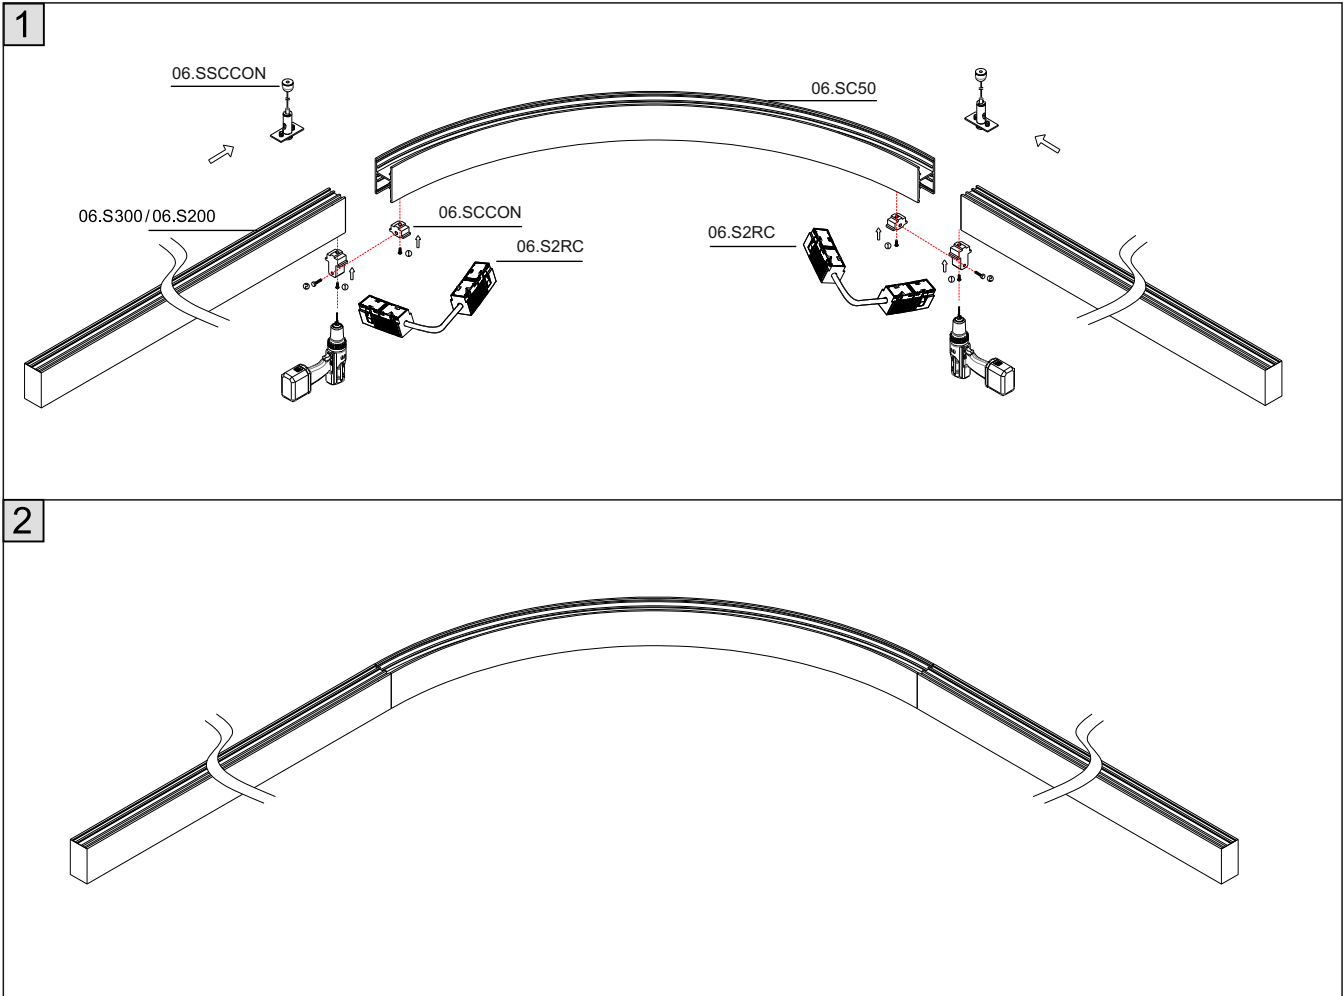



IN_LINE CORNER 90



	Code	Color
Surface «90» track electrical connector, 2 wired	06.SE90HR.WH	White
	06.SE90HR.BK	Black
Surface «90» track electrical connector, 4 wired	06.SE90HR.WH.4x	White
	06.SE90HR.BK.4x	Black

» 497



IN_LINE CORNER T RIGHT



	Code	Color
Surface T right track electrical connector, 2 wired	06.SETRHR.WH	White
	06.SETRHR.BK	Black
Surface T right track electrical connector, 4 wired	06.SETRHR.WH.4x	White
	06.SETRHR.BK.4x	Black

» 497


IN_LINE CORNER T LEFT



	Code	Color
Surface T left track electrical connector, 2 wired	06.SETLHR.WH	White
	06.SETLHR.BK	Black
Surface T left track electrical connector, 4 wired	06.SETLHR.WH.4x	White
	06.SETLHR.BK.4x	Black

» 497


IN_LINE CORNER X





	Code	Color
Surface «X» track electrical connector, 2 wired	06.SEQHR.WH	White
	06.SEQHR.BK	Black
Surface «X» track electrical connector, 4 wired	06.SEQHR.WH.4x	White
	06.SEQHR.BK.4x	Black

» 497

INSTALLATION SURFACE TRACK SYSTEM IN_LINE TRACK S

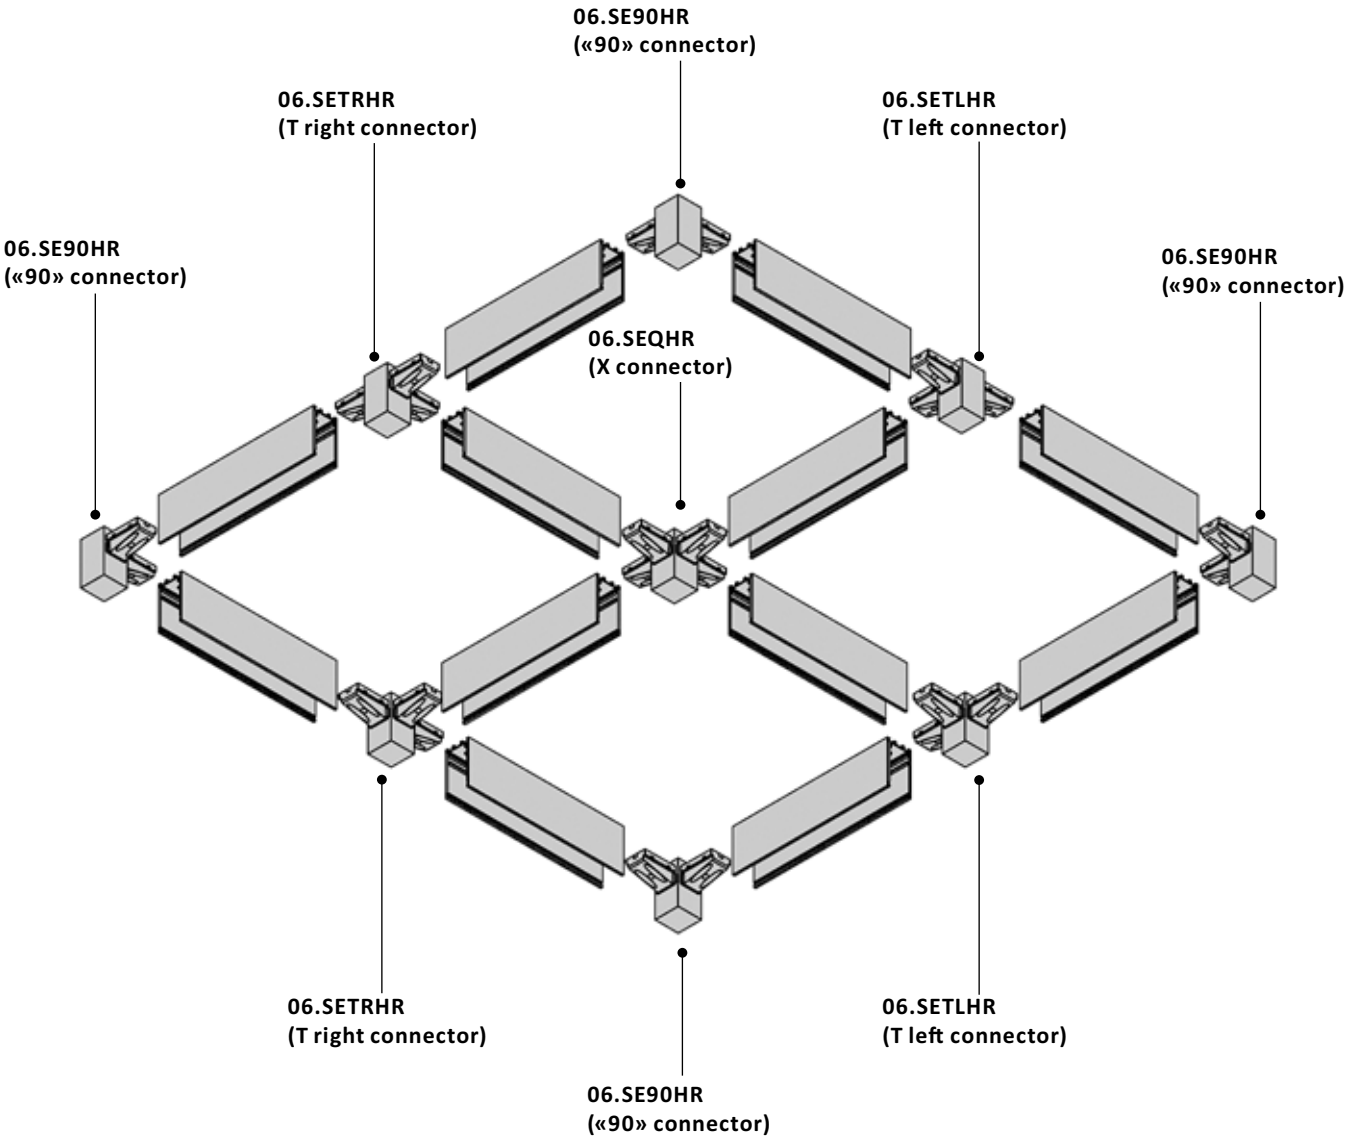


IN_LINE CORNER 180



	Code	Color
Surface «180» track electrical connector, 2 wired	06.SE180HR.WH	White
	06.SE180HR.BK	Black
Surface «180» track electrical connector, 4 wired	06.SE180HR.WH.4x	White
	06.SE180HR.BK.4x	Black

» 497


IN_LINE CORNER 120




	Code	Color
Surface «120» track electrical connector, 2 wired	06.SE120HR.WH	White
	06.SE120HR.BK	Black
Surface «120» track electrical connector, 4 wired	06.SE120HR.WH.4x	White
	06.SE120HR.BK.4x	Black

» 497

INSTALLATION SURFACE
TRACK SYSTEM IN_LINE TRACK S

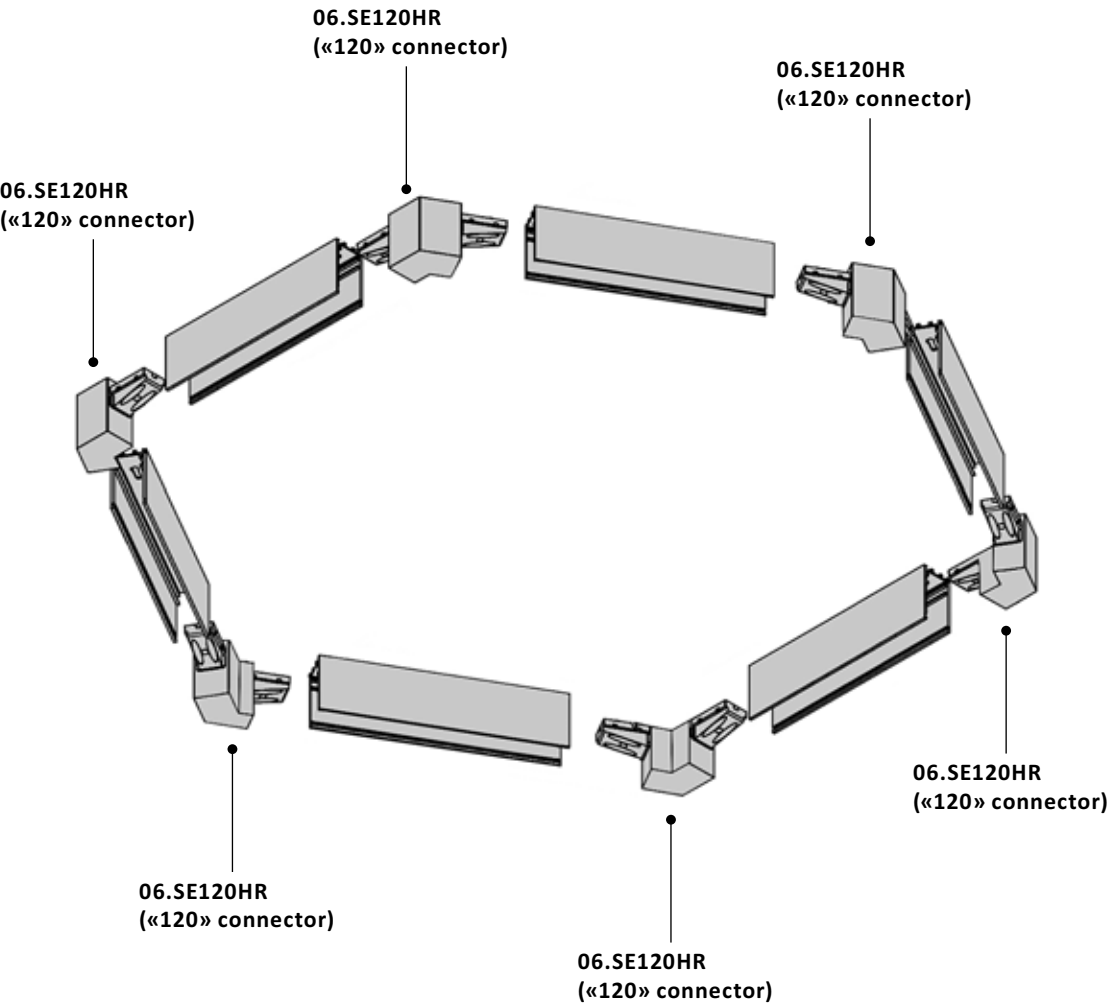

IN_LINE SHORT TRACK S



Code	Dimensions (mm): LxWxH	Color
06.SS300.WH	3000 x 30 x 37	White
06.SS300.BK	3000 x 30 x 37	Black



Surface /
Suspension
track, 2 wired
(End caps 2pcs/set
included)

CE EXCL

MATERIAL | AL

» 497

IN_LINE SHORT CORNER S HR



Code	Color
06.SS90HR.WH	White
06.SS90HR.BK	Black


Surface/suspension «L» track
connector (2 pcs 06.R/SLNCON
included)

CE 48V

MATERIAL | AL

» 497

IN_LINE SHORT END CAP



Code	Color
06.SSCAP.WH	White
06.SSCAP.BK	Black

End cap for surface 2 pcs/set


CE

MATERIAL | PC

» 497



IN_LINE LIVE END




CE IP20 48V

MATERIAL | PC

» 497

	Code	Dimensions (mm): LxWxH	Color
Feed cable, 2 wired	06.SLE60.WH	75x25x24	White
	06.SLE60.BK	75x25x24	Black
Feed cable, 4 wired	06.SLE60.WH.4x	100x25x24	White
	06.SLE60.BK.4x	100x25x24	Black

IN_LINE LIVE END




CE IP20 48V

MATERIAL | PC

» 497

	Code	Dimensions (mm): LxWxH	Color
Feed cable, 2 wired	06.SLE150.WH	75x25x24	White
	06.SLE150.BK	75x25x24	Black
Feed cable, 4 wired	06.SLE150.WH.4x	100x25x24	White
	06.SLE150.BK.4x	100x25x24	Black

IN_LINE ELECTRICAL JOINT




CE IP20 48V

MATERIAL | PC

» 497

	Code	Color
Electrical joint live end for track, 2 wired, without cable	06.SLE00.WH	White
	06.SLE00.BK	Black
Electrical joint live end for track, 4 wired, without cable	06.SLE00.WH.4x	White
	06.SLE00.BK.4x	Black

IN_LINE ELECTRICAL JOINT FLEX




CE IP20 48V

MATERIAL | PC

» 497

	Code	Color
Electrical joint flex connector for tack, 2 wired	06.S2LE60.WH	White
	06.S2LE60.BK	Black
Electrical joint flex connector for tack, 4 wired	06.S2LE60.WH.4x	White
	06.S2LE60.BK.4x	Black

IN_LINE MEC JOINT




CE IP20

MATERIAL | INOX

» 497

	Code	Color
Mechanical linear connector for track	06.R/SLNCON	Black

IN_LINE COVER R/S



	Code	Dimensions (mm): LxWxH	Color
Track cover for Recessed & Surface	06.R/SCOV200.WH	2000 x 26 x 5	White
	06.R/SCOV200.BK		Black
	06.R/SCOV300.WH	3000 x 26 x 5	White
	06.R/SCOV300.BK		Black



CE IP20

MATERIAL | PC

» 497

IN_LINE SUSP KIT




CE IP20

MATERIAL | INOX

» 497

	Code	Dimensions (mm): LxWxH	Color
Suspension	06.SS150.WH	1500 x 26 x 5	White
	06.SS150.BK		Black
	06.SS150.ZZ		Steel

IN_LINE POWER UNIT 100




CE IP20 SELV 48V NO DIM

MATERIAL | AL

» 497

	Code	Power Watt	Color
Power supply, 2 wired	06.PSU.100.WH	100	White
	06.PSU.100.BK	100	Black
Power supply, 4 wired	06.PSU.100.WH.4x	100	White
	06.PSU.100.BK.4x	100	Black

IN_LINE POWER UNIT 200



CE IP20 SELV 48V NO DIM

MATERIAL | AL

» 497

	Code	Power Watt	Color
Power supply, 2 wired	06.PSU.200.WH	200	White
	06.PSU.200.BK	200	Black
Power supply, 4 wired	06.PSU.200.WH.4x	200	White
	06.PSU.200.BK.4x	200	Black

POWER SUPPLY




CE IP20 48V NO DIM

MATERIAL | PC

» 497

	Code	Dimensions (mm): LxWxH	Power Watt	Color
	06.PSU.100.W/O	298 x 30 x 16,5	100	Grey
	06.PSU.200.W/O	384 x 30 x 22	200	Grey
	06.PSU.250.W/O	384 x 30 x 22	250	Grey

POWER SUPPLY DIMMING DALI 2 WIRED




CE IP20 48V DALI

MATERIAL | STEEL

» 497

	Dimensions (mm): LxWxH	Power Watt	Color
28001233	235 x 100 x 31	75	White
28001044	235 x 100 x 31	150	White

POWER SUPPLY DIMMING DALI 2 WIRED




CE IP20 48V DALI

MATERIAL | PC


» 497

	Dimensions (mm): LxWxH	Power Watt	Color
28000815	360 x 40 x 21	75	White / Grey
28001235	360 x 40 x 21	150	White / Grey


INSTALLATION RECESSED TRACK SYSTEM IN_LINE TRACK T

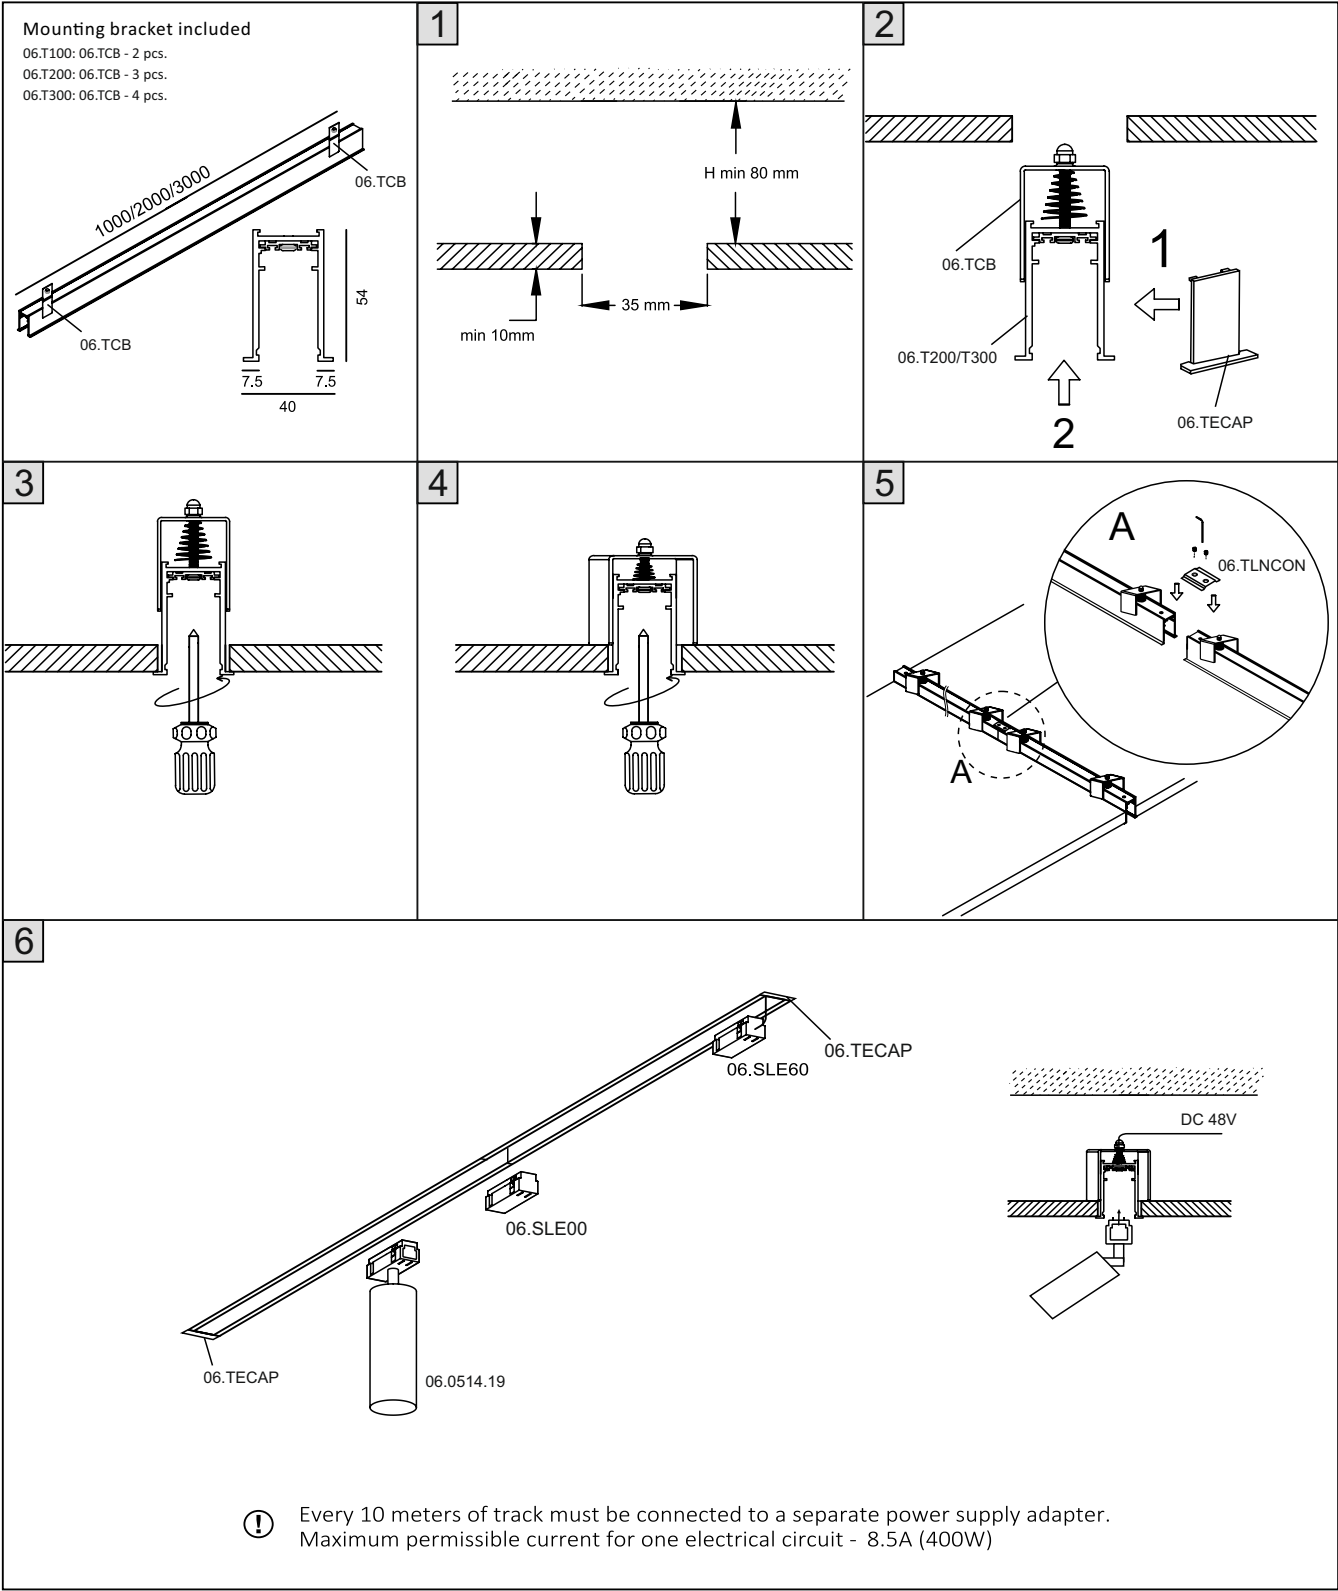

INSTALLATION RECESSED TRACK SYSTEM IN_LINE TRACK R

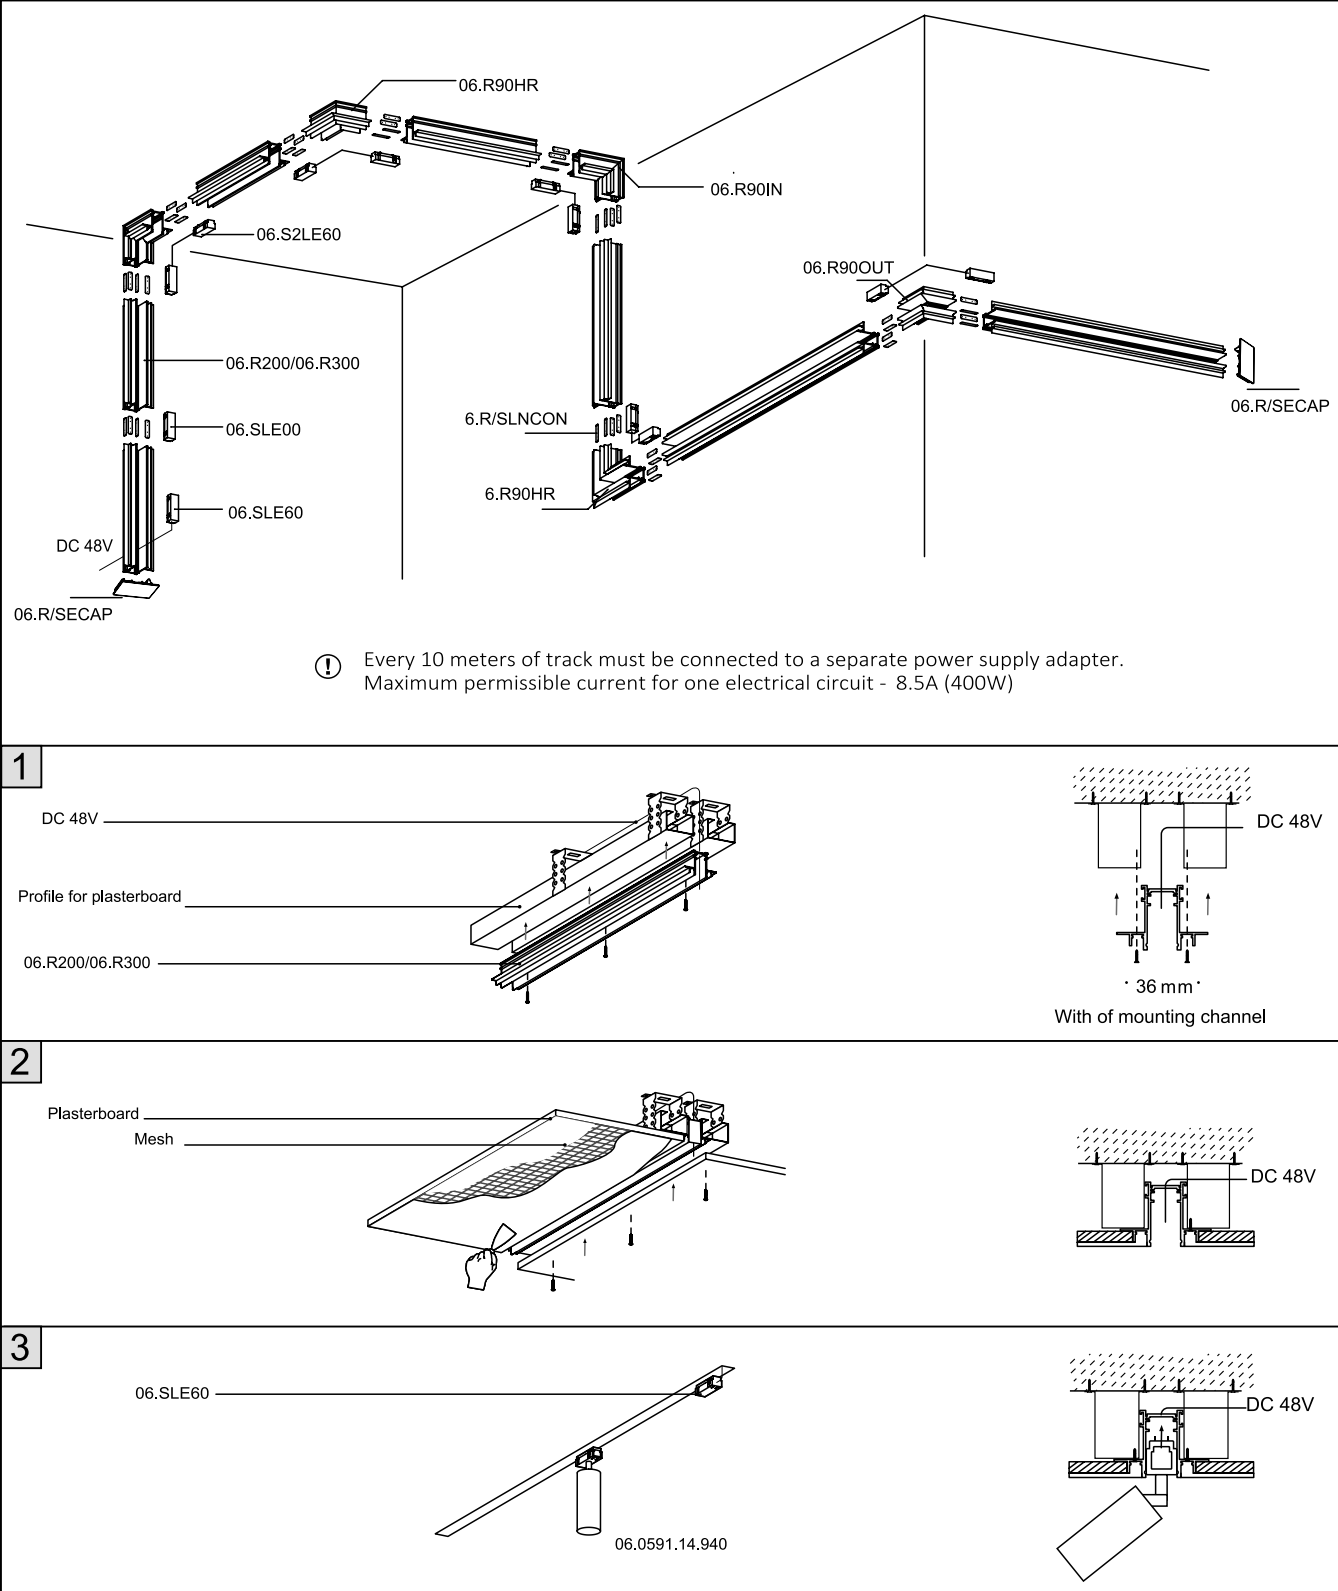


INSTALLATION SURFACE TRACK SYSTEM IN_LINE TRACK S

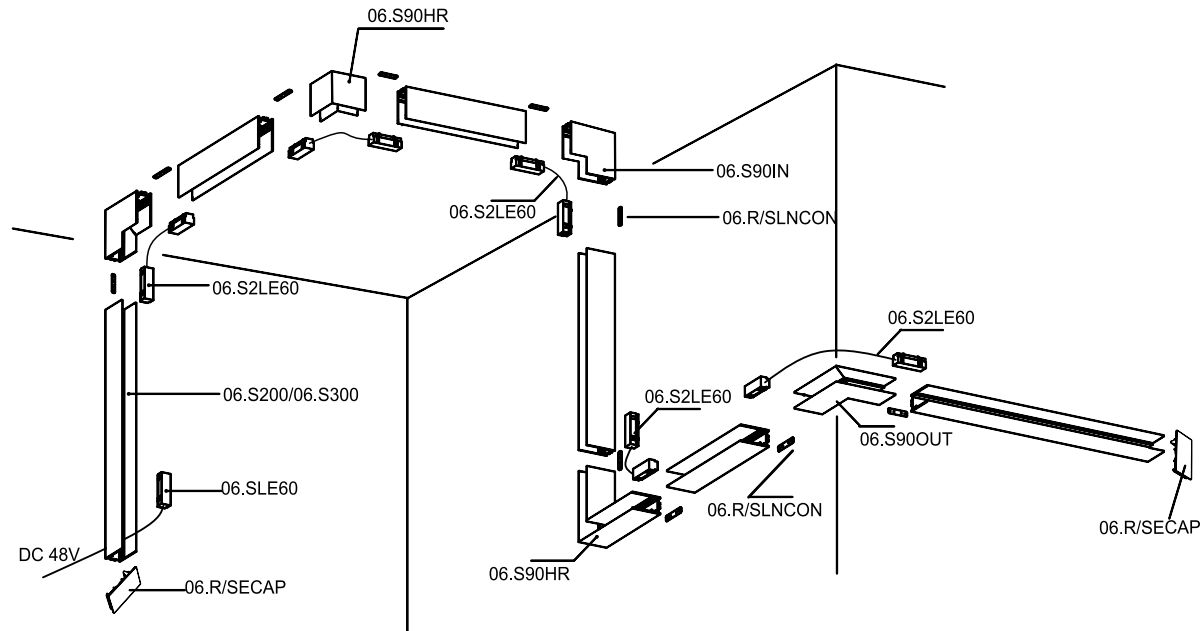


! Every 10 meters of track must be connected to a separate power supply adapter. Maximum permissible current for one electrical circuit - 8.5A (400W)

INSTALLATION SUSPENDED TRACK SYSTEM IN_LINE

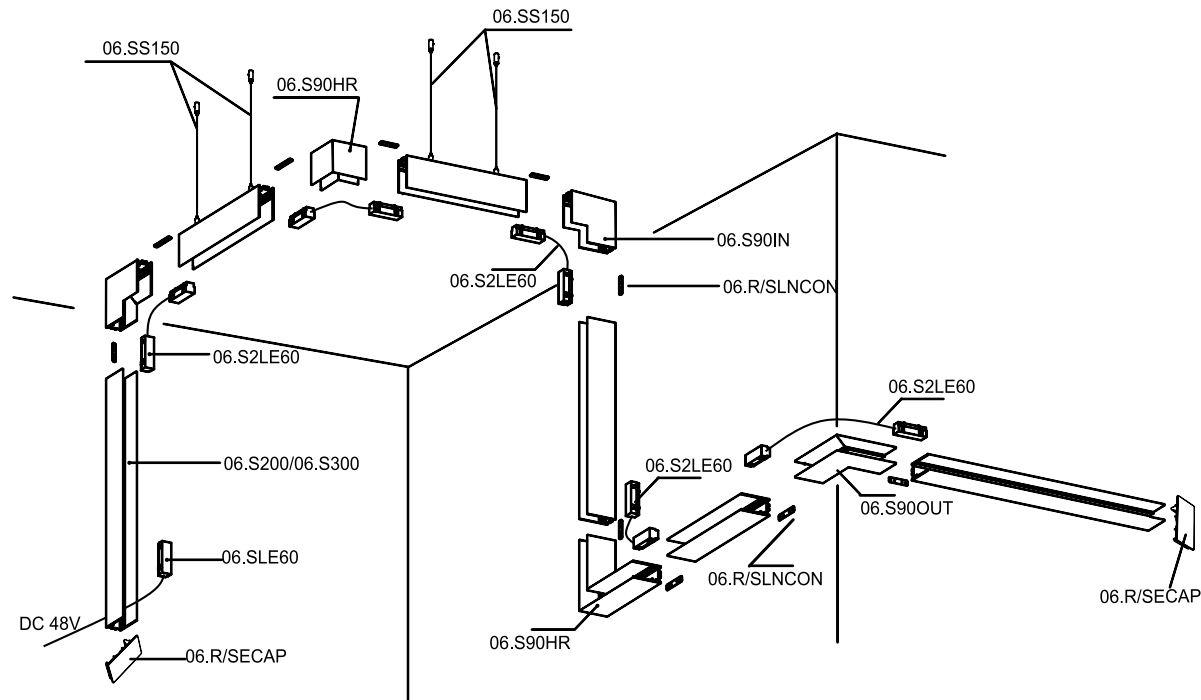


! Every 10 meters of track must be connected to a separate power supply adapter. Maximum permissible current for one electrical circuit - 8.5A (400W)

INSTALLATION SURFACE TRACK SYSTEM IN_LINE SHORT TRACK S

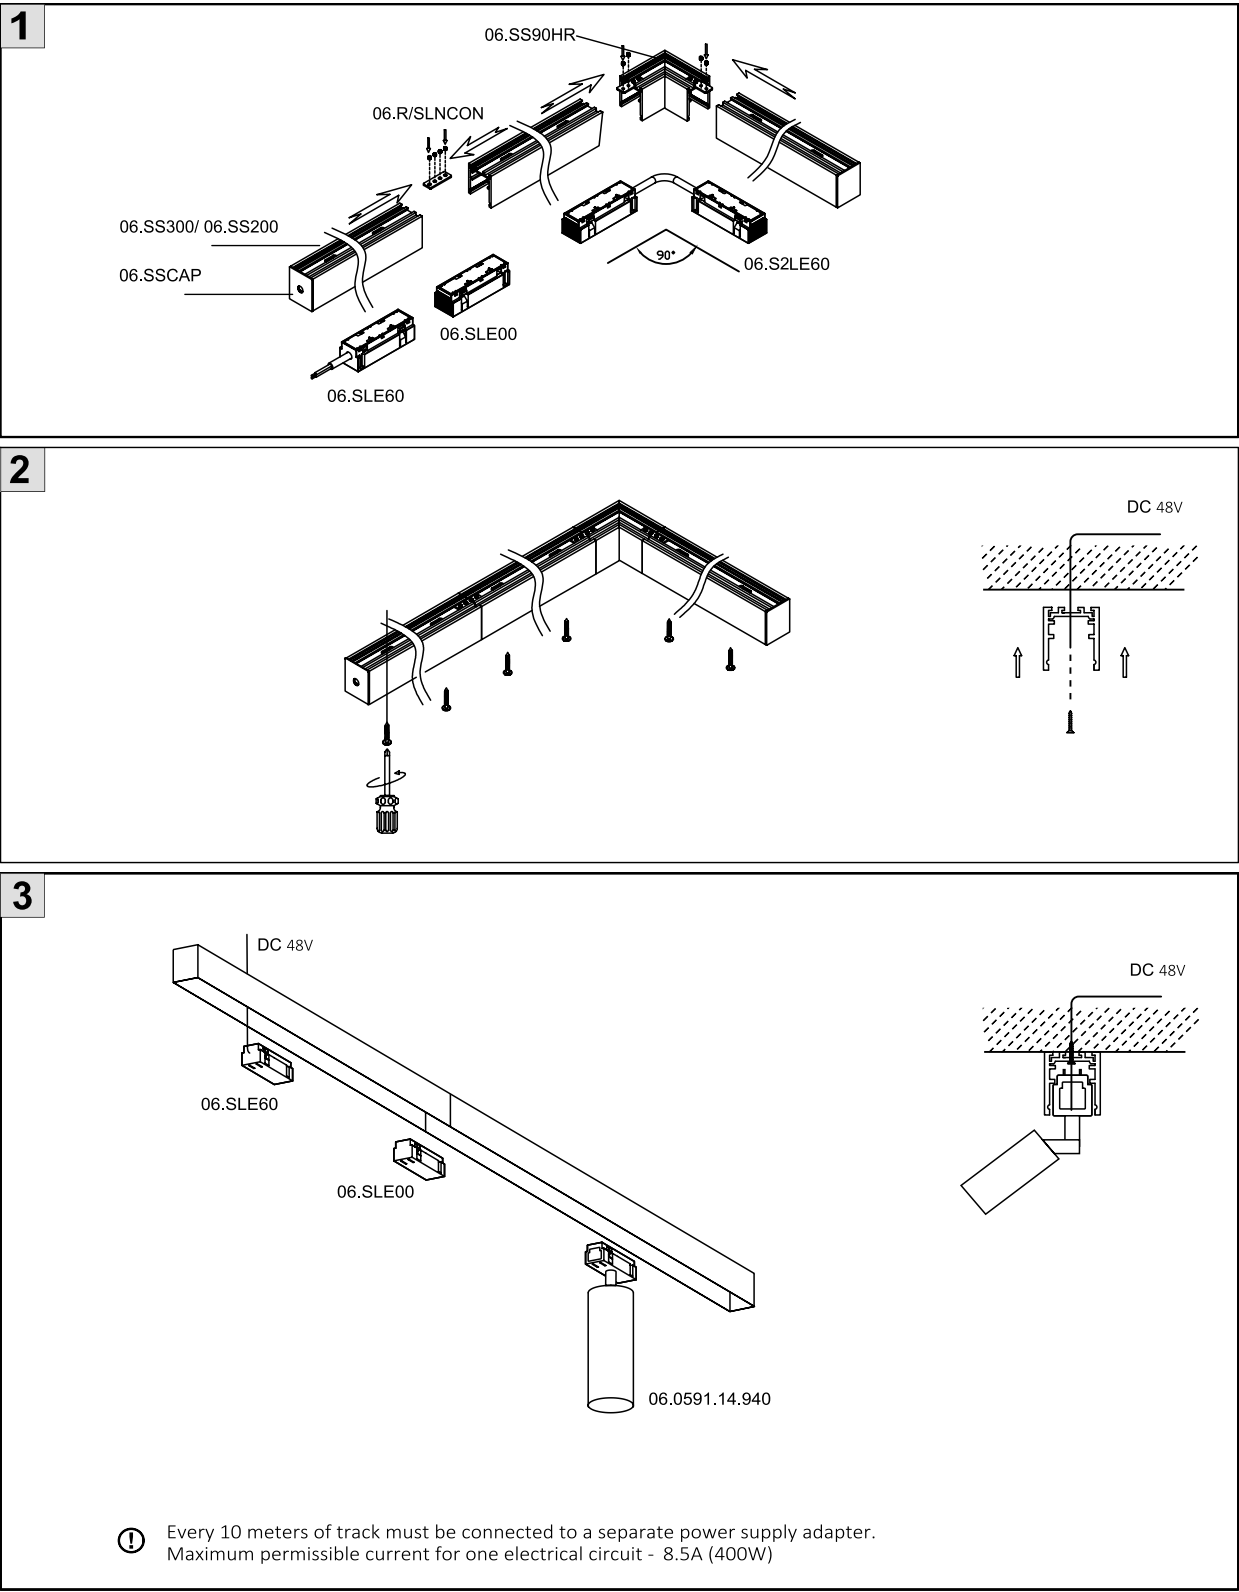

! Every 10 meters of track must be connected to a separate power supply adapter. Maximum permissible current for one electrical circuit - 8.5A (400W)

IN_LINE LINEA 205




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2050.6.930.XX.***	6	3000	>90	406
06.2050.6.940.XX.***	6	4000	>90	435



MATERIAL | AL PC

i » 497

IN_LINE LINEA 407





Code	Power Watt	Color T (K)	CRI	Product Lumen
06.4070.11.930.XX.***	11	3000	>90	782
06.4070.11.940.XX.***	11	4000	>90	810



MATERIAL | AL PC

i » 497

IN_LINE LINEA 800



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.8000.18.930.XX.***	18	3000	>90	1450
06.8000.18.940.XX.***	18	4000	>90	1495



MATERIAL | AL PC


i » 497

Color	Body
XX	
BK	BK ■
WH	WH □

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



IN_LINE COMFORT 69




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0691.4.930.XX	4	3000	>90	273
06.0691.4.940.XX	4	4000	>90	330



MATERIAL | AL PC

» 497

IN_LINE COMFORT 137





Code	Power Watt	Color T (K)	CRI	Product Lumen
06.1371.8.930.XX	8	3000	>90	557
06.1371.8.940.XX	8	4000	>90	684



MATERIAL | AL PC

» 497

IN_LINE COMFORT 205



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2051.12.930.XX.***	12	3000	>90	800
06.2051.12.940.XX.***	12	4000	>90	800





MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK
WH	WH

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

IN_LINE COMFORT 407




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.4071.20.930.XX.***	20	3000	>90	1600
06.4071.20.940.XX.***	20	4000	>90	1600



MATERIAL | AL PC

» 497

IN_LINE WALL WASHER 205



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2055.10.930.XX.***	10	3000	>90	990
06.2055.10.940.XX.***	10	4000	>90	1025



MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK
WH	WH


***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



IN_LINE TUB XS A22 X2



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2221.4.930.XX.***	2 x 2	3000	>90	2 x 77
06.2221.4.940.XX.***	2 x 2	4000	>90	2 x 90




LED CE IP20 48V

MATERIAL | AL PC


» 497

Color	Body	Options
XX		
BK	BK	ON/OFF
BR	BR	
CR	CR	
WH	WH	

06.2221.4.930.BK	06.2221.4.930.BR
06.2221.4.930.CR	06.2221.4.930.WH

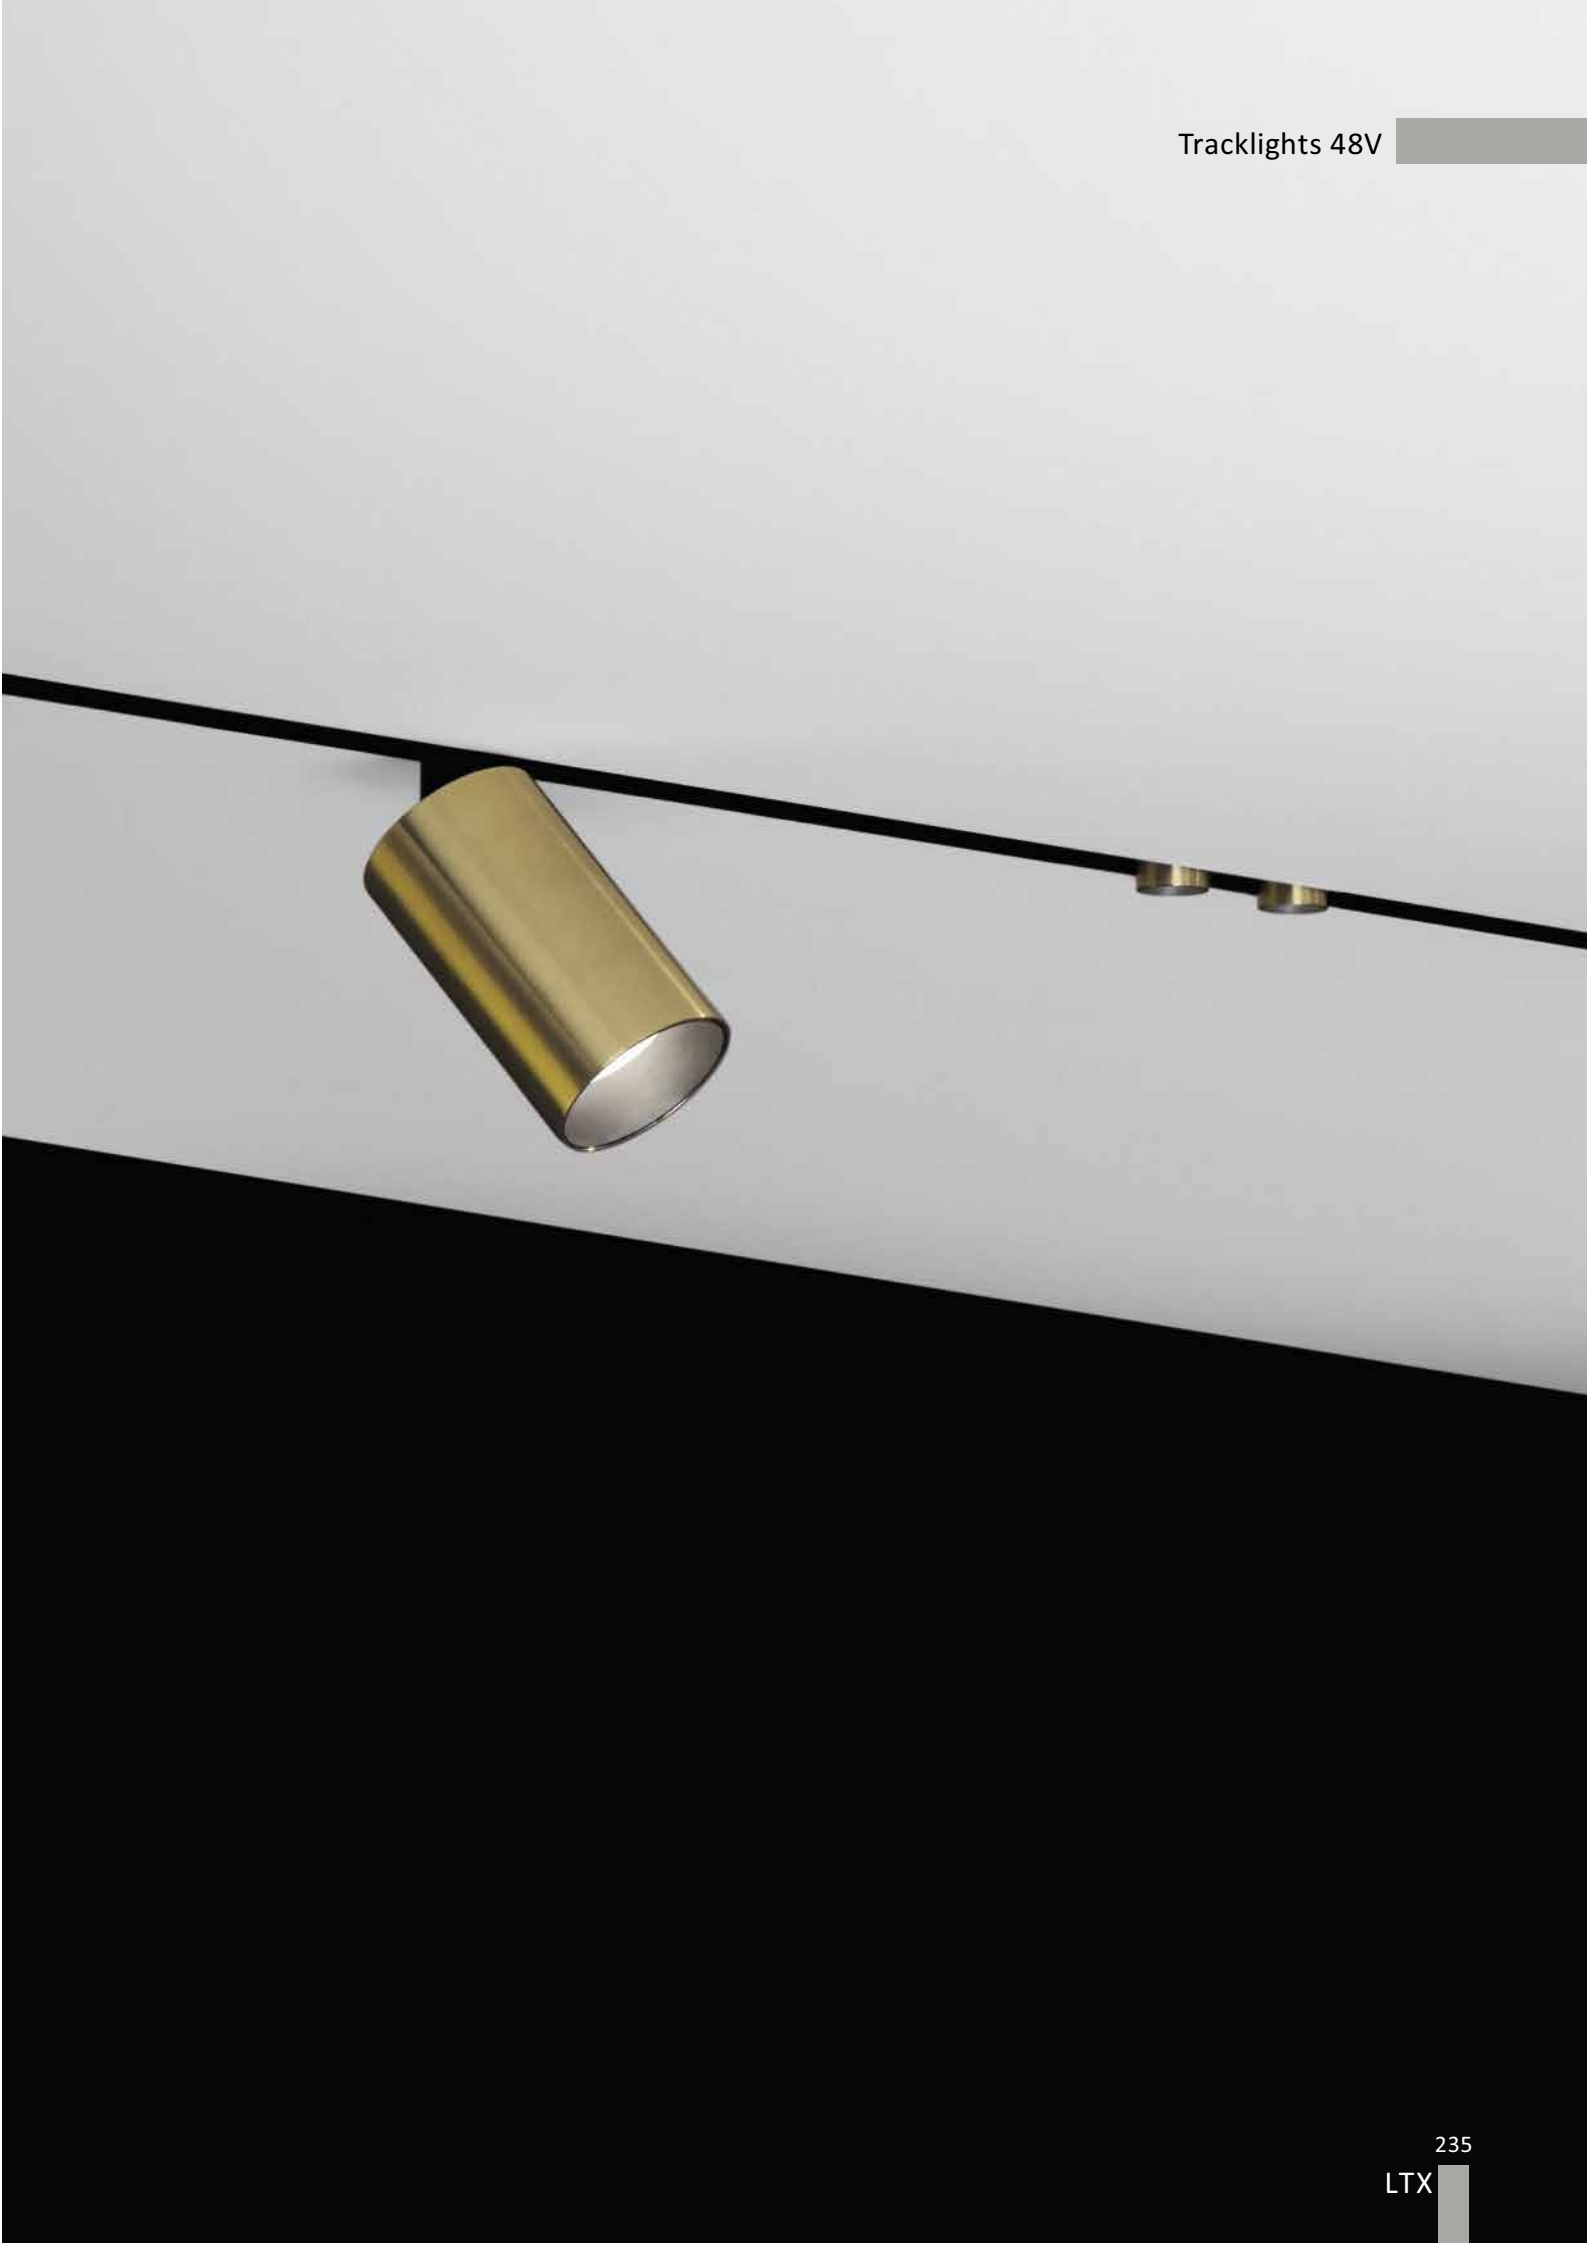

IN_LINE COMFORT B 205




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2052.12.930.XX.***	12	3000	>90	800
06.2052.12.940.XX.***	12	4000	>90	850



MATERIAL | AL PC

i » 497

IN_LINE LINEA B 205



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2053.6.930.XX.***	6	3000	>90	410
06.2053.6.940.XX.***	6	4000	>90	424



MATERIAL | AL PC

i » 497

Color	Body
XX	
BK	BK ■
WH	WH □

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




06.2052.12.930.WH



06.2053.6.930.WH



IN_LINE INDIRECT




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.SUPPCB.930.***	12	3000	>90	1360
06.SUPPCB.940.***	12	4000	>90	1450

LED CE IP20 48V EXCL 110° - LEDs/cut 15/175mm

MATERIAL | AL PC

i » 497




Code	Dimensions (mm): LxWxH	Color
06.SUPCOV	1000 x 24 x 5,3	Transparent



LED CE IP20

MATERIAL | PC

i » 497

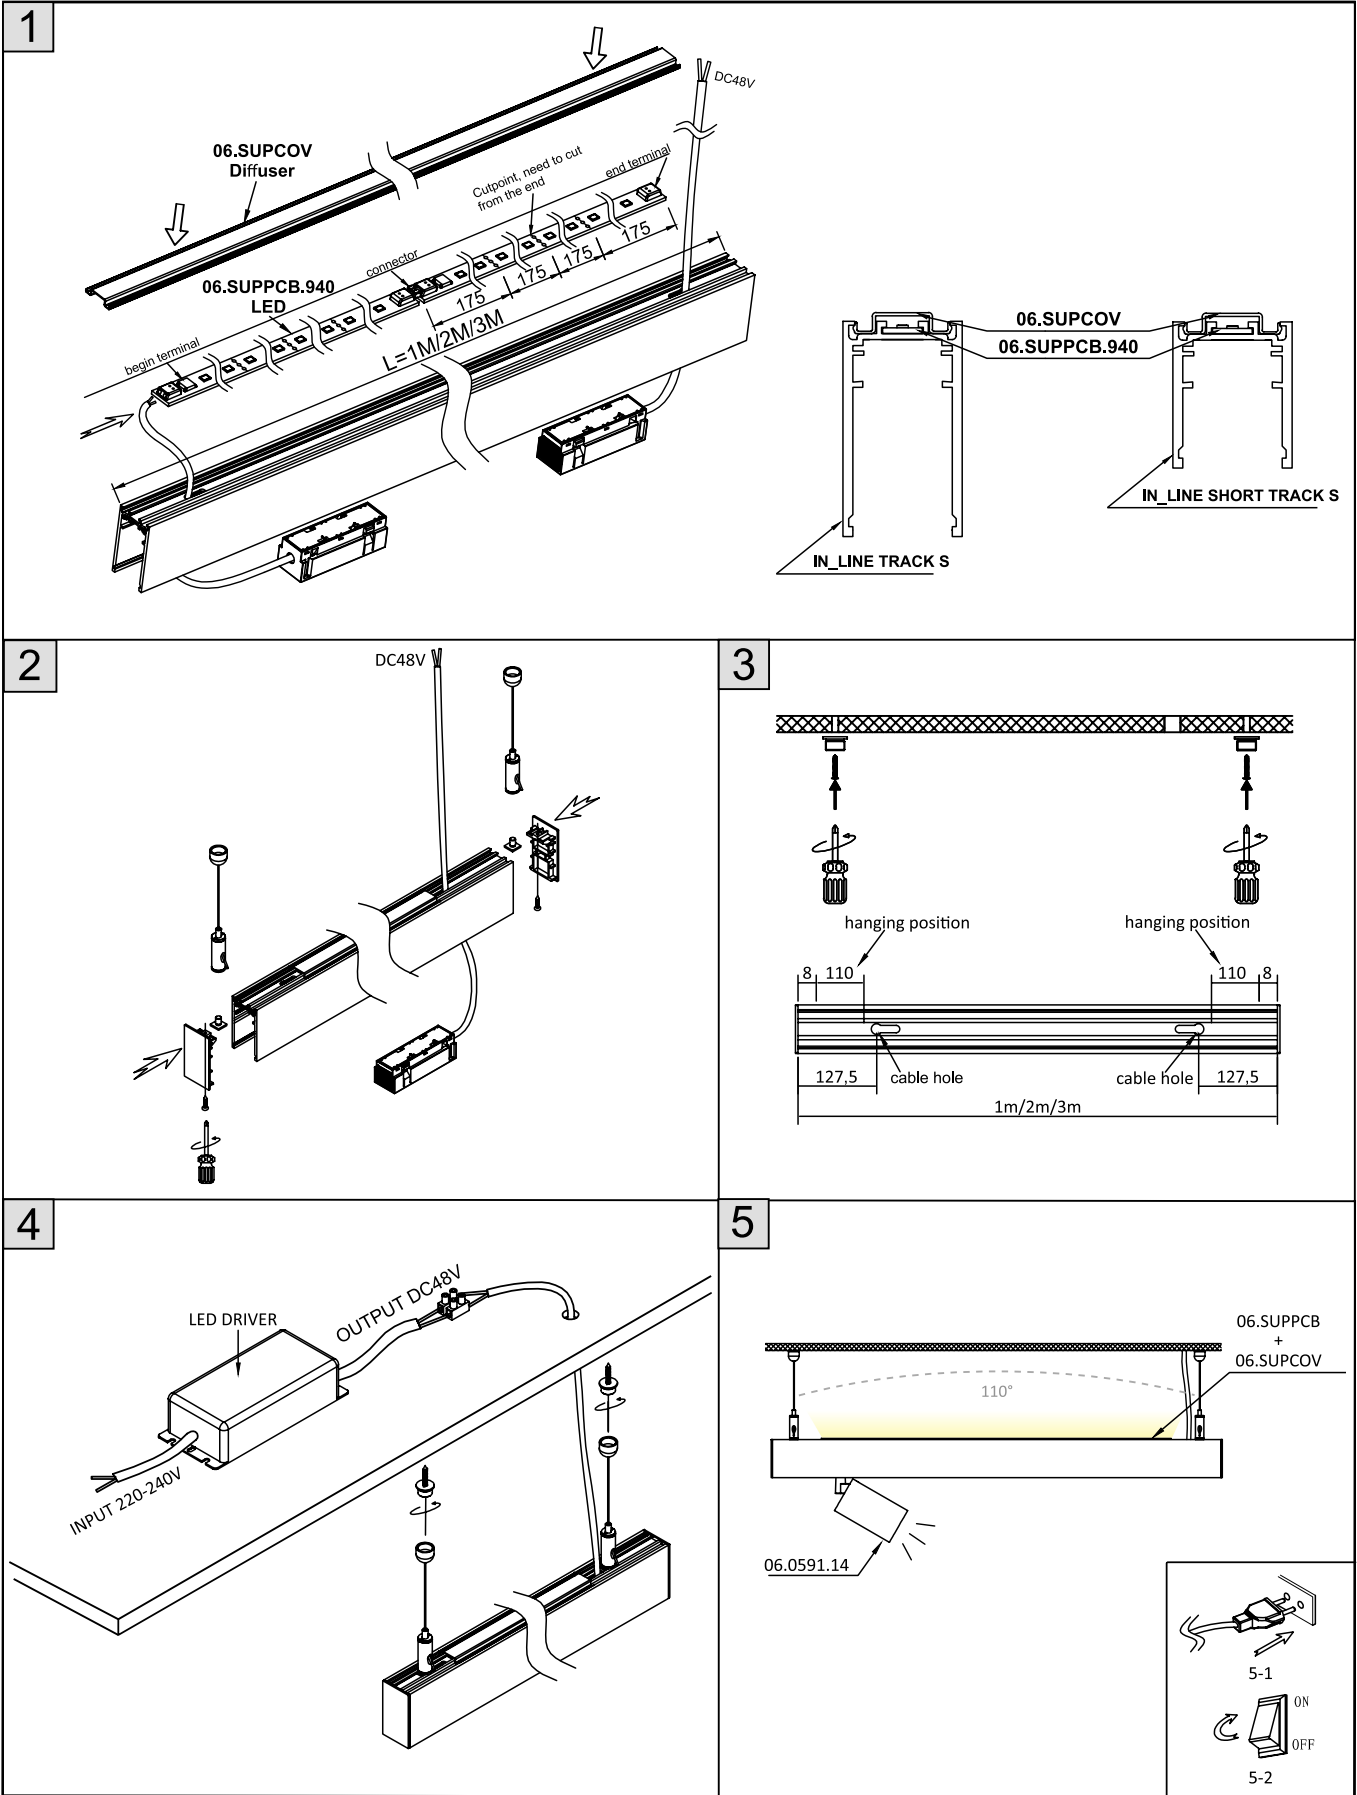

IN_LINE TUB XS A 48



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0248.02.930.XX.***	2,1	3000	>90	112
06.0248.02.940.XX.***	2,1	4000	>90	112

LED

CE

IP20


48V

MATERIAL | AL PC

» 497

Color	Body	Adapter
XX		
BK	BK	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




06.0248.02.930.WH




06.0248.02.930.BK



IN_LINE TUB S A 60



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0361.8.930.XX.***	5,4	3000	>90	535
06.0361.8.940.XX.***	5,4	4000	>90	535



LEDCEIIIFFIP2048VEXCL50°TiltRotate

MATERIAL | ALPC

i » 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

i » 492

Color XX	Body	Adapter
BK	BK	BK
BR/BK	BR	BK
BZ/BK	BZ	BK
CR/BK	CR	BK
DB/BK	DB	BK
MN/BK	MN	BK
SB/BK	SB	BK
WH	WH	BK
WHW	WH	WH

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.0361.8.930.BK

06.0361.8.930.BR/BK

06.0361.8.930.BZ/BK

06.0361.8.930.CR/BK

06.0361.8.930.DB/BK

06.0361.8.930.SB/BK

06.0361.8.930.MN/BK


06.0361.8.930.WH

06.0361.8.930.WHW

IN_LINE TUB S A 60 X2



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2301.14.930.XX.***	2 x 4,5	3000	>90	2 x 430
06.2301.14.940.XX.***	2 x 4,5	4000	>90	2 x 430



LEDCEIIIFFIP2048VEXCL50°TiltRotate

MATERIAL | ALPC

i » 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

i » 492

Color XX	Body	Adapter
BK	BK	BK
BR	BR	BK
BZ	BZ	BK
CR	CR	BK
DB	DB	BK
MN	MN	BK
SB	SB	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.2301.14.930.BK

06.2301.14.930.BR


06.2301.14.930.BZ

06.2301.14.930.DB


06.2301.14.930.MN

06.2301.14.930.SB

IN_LINE ZOOM S



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0369.6.930.XX.***	5,4	3000	>90	228-307
06.0369.6.940.XX.***	5,4	4000	>90	228-307




LEDCEIIIIEIP2048VEXCL15°-50°TiltRotate


MATERIAL | ALPC

i » 497

IN_LINE ZOOM



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0599.13.930.XX.***	13	3000	>90	615-1040
06.0599.13.940.XX.***	13	4000	>90	615-1040




LEDCEIIIIEIP2048VEXCL15°-50°TiltRotate

MATERIAL | ALPC

i » 497

Color XX	Body	Adapter
BK	BK	BK
WH	WH	BK
WHW	WH	WH

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




06.0369.6.930.BK




06.0599.13.930.BK

IN_LINE TUB M NB



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0595.9.930.XX.***	10	3000	>90	640
06.0595.9.940.XX.***	10	4000	>90	640




LEDCEIIIIEIP2048VEXCL6°TiltRotate

MATERIAL | ALPC

i » 497

Color XX	Body	Adapter
BK	BK	BK
WH	WH	BK
WHW	WH	WH

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




06.0595.9.930.WH



06.0595.9.930.BK

IN_LINE GALLERY





Code	Power Watt	Color T (K)	CRI	Product Lumen
06.5160.13.930.XX.***	6,3	3000	>90	600
06.5160.13.940.XX.***	6,3	4000	>90	600



MATERIAL | AL PC

» 497

A (mm)	H (mm)	φ (mm)
1000	320	500
2000	630	990
3000	950	1490

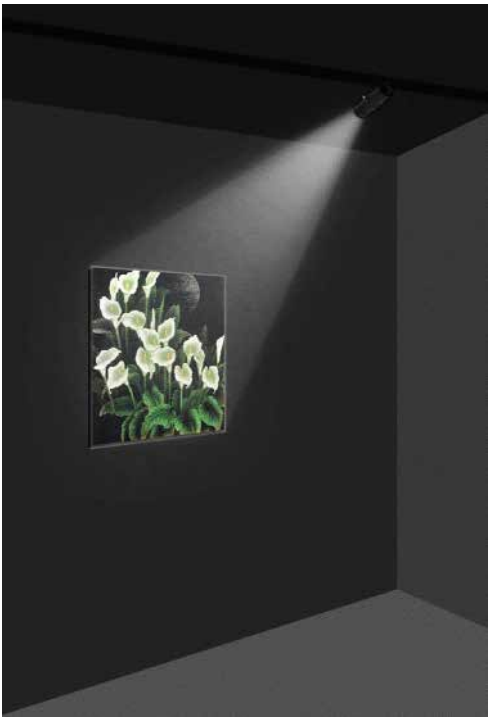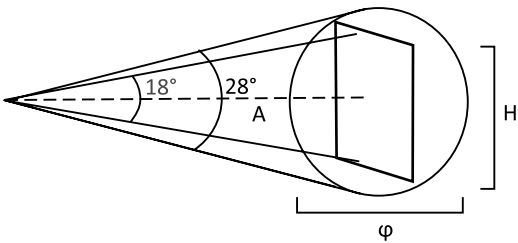

Color	Body	Adapter
XX		
BK	BK	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




06.5160.13.930.WH



06.5160.13.930.BK



IN_LINE TUB M A 90



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0591.14.930.XX.***	10,8	3000	>90	1120
06.0591.14.940.XX.***	10,8	4000	>90	1120

ACCESSORIES		
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

LED CE EXCL

MATERIAL | AL PC

» 497

» 492

ACCESSORIES		
	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG

» 492

Color	Body	Adapter
XX		
BK	BK	BK
BR/BK	BR	BK
BZ/BK	BZ	BK
CR/BK	CR	BK
DB/BK	DB	BK
MN/BK	MN	BK
SB/BK	SB	BK
WH	WH	BK
WHW	WH	WH

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.0591.14.930.BK

06.0591.14.930.BR/BK

06.0591.14.930.BZ/BK

06.0591.14.930.CR/BK

06.0591.14.930.DB/BK

06.0591.14.930.SB/BK


06.0591.14.930.MN/BK

06.0591.14.930.WH

06.0591.14.930.WHW



IN_LINE TUB M A 140



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0514.19.930.XX.***	19	3000	>90	1970
06.0514.19.940.XX.***	19	4000	>90	1970

LEDCE

IP2048V

EXCL

50°

Tilt

Rotate

MATERIAL | ALPC

i » 497

ACCESSORIES		
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30
		i » 492

ACCESSORIES		
	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG
		i » 492

Color	Body	Adapter
XX		
BK	BK	BK
BR/BK	BR	BK
BZ/BK	BZ	BK
CR/BK	CR	BK
DB/BK	DB	BK
MN/BK	MN	BK
SB/BK	SB	BK
WH	WH	BK
WHW	WH	WH

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.0514.19.930.BK

06.0514.19.930.BR/BK

06.0514.19.930.BZ/BK

06.0514.19.930.SB/BK

06.0514.19.930.MN/BK


06.0514.19.930.WHW



IN_LINE SOL MINI



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.7526.7.930.XX.***	6,3	3000	>90	610
06.7526.7.940.XX.***	6,3	4000	>90	610



LED

CE

48V

MATERIAL | AL PC

» 497

Color XX	M RING	Adapter
BK	BK	BK
BR/BK	BR	BK
CP/BK	CP	BK
CR/BK	CR	BK
DB/BK	DB	BK
WH/BK	WH	BK
WH	WH	WH
BK/WH	BK	WH
BR/WH	BR	WH
CP/WH	CP	WH
CR/WH	CR	WH
DB/WH	DB	WH


***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.7526.7.930.WH	06.7526.7.930.BR/WH	06.7526.7.930.CP/WH
06.7526.7.930.BK	06.7526.7.930.BR/BK	06.7526.7.930.CP/BK
06.7526.7.930.CR/WH	06.7526.7.930.DB/WH	06.7526.7.930.BK/WH
06.7526.7.930.CR/BK	06.7526.7.930.DB/BK	06.7526.7.930.WH/BK

IN_LINE SOL MINI



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.7526.7.930.XX.***	6,3	3000	>90	610
06.7526.7.940.XX.***	6,3	4000	>90	610



LED

CE

48V

MATERIAL | AL PC

» 497

Color XX	M RING	Adapter
BKG/BK	BKG	BK
BRG/BK	BRG	BK
BZG/BK	BZG	BK
CFG/BK	CFG	BK
CPG/BK	CPG	BK
CRG/BK	CRG	BK
DBG/BK	DBG	BK
SBG/BK	SBG	BK
WHG/BK	WHG	BK
BKG/WH	BKG	WH
BRG/WH	BRG	WH
BZG/WH	BZG	WH
CFG/WH	CFG	WH
CPG/WH	CPG	WH
CRG/WH	CRG	WH
DBG/WH	DBG	WH
SBG/WH	SBG	WH
WHG/WH	WHG	WH


***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.7526.7.930.WHG/WH	06.7526.7.930.BRG/WH	06.7526.7.930.BZG/WH
06.7526.7.930.BKG/BK	06.7526.7.930.BRG/BK	06.7526.7.930.BZG/BK
06.7526.7.930.CFG/WH	06.7526.7.930.SBG/WH	06.7526.7.930.BKG/WH
06.7526.7.930.CFG/BK	06.7526.7.930.SBG/BK	06.7526.7.930.WHG/BK

IN_LINE SOL



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.9533.14.930.XX.***	10,8	3000	>90	1120
06.9533.14.940.XX.***	10,8	4000	>90	1120



LEDCE

IP2048V

EXCL

38°

Tilt

Rotate

MATERIAL |

AL

PC

i

» 497

Color XX	M RING	Adapter
BK	BK BK	
BR/BK	BR BK	
CP/BK	CP BK	
CR/BK	CR BK	
DB/BK	DB BK	
WH/BK	WH BK	
WH	WH WH	
BK/WH	BK WH	
BR/WH	BR WH	
CP/WH	CP WH	
CR/WH	CR WH	
DB/WH	DB WH	

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.9533.14.930.WH

06.9533.14.930.BR/WH

06.9533.14.930.CP/WH

06.9533.14.930.BK

06.9533.14.930.BR/BK

06.9533.14.930.CP/BK

06.9533.14.930.CR/WH

06.9533.14.930.DB/WH

06.9533.14.930.BK/WH

06.9533.14.930.CR/BK


06.9533.14.930.DB/BK

06.9533.14.930.WH/BK

IN_LINE SOL



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.9533.14.930.XX.***	10,8	3000	>90	1120
06.9533.14.940.XX.***	10,8	4000	>90	1120



LEDCE

IP2048V

EXCL

38°

Tilt

Rotate

MATERIAL |

AL

PC

i

» 497

Color XX	M RING	Adapter
BKG/BK	BKG BK	
BRG/BK	BRG BK	
BZG/BK	BZG BK	
CFG/BK	CFG BK	
CPG/BK	CPG BK	
CRG/BK	CRG BK	
DBG/BK	DBG BK	
SBG/BK	SBG BK	
WHG/BK	WHG BK	
BKG/WH	BKG WH	
BRG/WH	BRG WH	
BZG/WH	BZG WH	
CFG/WH	CFG WH	
CPG/WH	CPG WH	
CRG/WH	CRG WH	
DBG/WH	DBG WH	
SBG/WH	SBG WH	
WHG/WH	WHG WH	

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.9533.14.930.BRG/WH

06.9533.14.930.BZG/WH

06.9533.14.930.CFG/WH

06.9533.14.930.BRG/BK

06.9533.14.930.BZG/BK

06.9533.14.930.CFG/BK

06.9533.14.930.CPG/WH

06.9533.14.930.CRG/WH



06.9533.14.930.DBG/WH

06.9533.14.930.CPG/BK

06.9533.14.930.CRG/BK

06.9533.14.930.DBG/BK

IN_LINE WIN





Code	Power Watt	Color T (K)	CRI	Product Lumen
06.WIN.3.930.XX.***	3	3000	>90	1800
06.WIN.3.940.XX.***	3	4000	>90	1800

LED CE IP20 48V EXCL 172°x4° Rotate

MATERIAL | AL GL

i » 497

IN_LINE SFERA



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.1001.5.930.XX.***	5	3000	>90	250
06.1001.5.940.XX.***	5	4000	>90	250

LED CE IP20 48V EXCL 360°

MATERIAL | AL GL


i » 497

Color XX	Body	Adapter
BK	BK ■	BK ■
WH	WH □	BK ■


***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



IN_LINE ART



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2420.14.930.XX.***	14	3000	>90	750
06.2420.14.940.XX.***	14	4000	>90	750



LED

CE

IP20

48V

EXCL

DIFFUSED

Tilt

MATERIAL |


AL

PC

i

 » 497

IN_LINE STICKS



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.8003.20.930.XX.***	20	3000	>90	1200
06.8003.20.940.XX.***	20	4000	>90	1275

LED

CE

IP20

48V

EXCL

DIFFUSED

MATERIAL |

AL

PC

i

 » 497

Color	Body	Adapter
XX		
BK	BK	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




OTHER COLORS TEMPERATURE ON REQUEST



LIFESTYLE INTERIOR

IN_LINE BALL M




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.1000.7.930.XX.***	7	3000	>90	590
06.1000.7.940.XX.***	7	4000	>90	590




MATERIAL | AL GL

» 497

IN_LINE BALL L



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.1800.28.930.XX.***	28	3000	>90	2181
06.1800.28.940.XX.***	28	4000	>90	2181



MATERIAL | AL GL

» 497

Color	Body	Adapter
XX	BK	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI





06.1000.7.930.WH



06.1800.28.930.WH



IN_LINE TUB XS P



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0160.2.930.XX.***	2,4	3000	>90	137
06.0160.2.940.XX.***	2,4	4000	>90	137



MATERIAL | AL

» 497

Color	Body	Adapter
XX		
BK	BK	BK
BR	BR	BK
WH	WH	BK


***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



06.0160.2.930.BK




06.0160.2.930. BR



06.0160.2.930.WH



IN_LINE MATCH 450




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0340.7.930.XX.***	7	3000	>90	415
06.0340.7.940.XX.***	7	4000	>90	415



MATERIAL | BR PC

» 497

IN_LINE MATCH 550



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0350.7.930.XX.***	7	3000	>90	415
06.0350.7.940.XX.***	7	4000	>90	415



MATERIAL | BR PC


» 497

Color	Body	Adapter
XX	BR	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



IN_LINE TUB S P 200



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0320.8.930.XX.***	7	3000	>90	610
06.0320.8.940.XX.***	7	4000	>90	610



MATERIAL | AL PC

» 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

» 492

Color XX	Body	Adapter
BK	BK	BK
BR	BR	BK
BZ	BZ	BK
DB	DB	BK
MN	MN	BK
SB	SB	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



06.0320.8.930.BR



06.0320.8.930.BZ



06.0320.8.930.DB



06.0320.8.930.MN




06.0320.8.930.SB



06.0320.8.930.WH

IN_LINE TUB S P 300



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0331.8.930.XX.***	7	3000	>90	610
06.0331.8.940.XX.***	7	4000	>90	610



MATERIAL | AL PC

» 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

» 492

Color XX	Body	Adapter
BK	BK	BK
BR	BR	BK
BZ	BZ	BK
MN	MN	BK
SB	SB	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



06.0331.8.930.BK



06.0331.8.930.BR



06.0331.8.930.BZ



06.0331.8.930.MN




06.0331.8.930.SB



06.0331.8.930.WH

IN_LINE TUB S P 600



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0360.8.930.XX.***	7	3000	>90	610
06.0360.8.940.XX.***	7	4000	>90	610



MATERIAL | AL PC

» 497


ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

» 492

Color XX	Body	Adapter
BK	BK	BK
BR	BR	BK
BZ	BZ	BK
MN	MN	BK
SB	SB	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




06.0360.8.930.BK




06.0360.8.930.BR



06.0360.8.930.BZ



06.0360.8.930.MN




06.0360.8.930.SB



06.0360.8.930.WH

IN_LINE TUB S P 300 ZOOM



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0339.6.930.XX.***	5,4	3000	>90	228-307
06.0339.6.940.XX.***	5,4	4000	>90	228-307



MATERIAL | AL PC

» 497

Color XX	Body	Adapter
BK	BK	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI




06.0339.6.930.BK



06.0339.6.930.WH

IN_LINE TUB M P 200



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0521.19.930.XX.***	10,8	3000	>90	1120
06.0521.19.940.XX.***	10,8	4000	>90	1120

ACCESSORIES		
	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

LEDCE↓III∇IP2048VEXCL50°TiltRotate

MATERIAL | AL PC

» 497

ACCESSORIES		
	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG

» 492

Color XX	Body	Adapter
BK	BK	BK
BR	BR	BK
BZ	BZ	BK
MN	MN	BK
SB	SB	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.0521.19.930.BK

06.0521.19.930.BR


06.0521.19.930.BZ

06.0521.19.930.MN

06.0521.19.930.SB

06.0521.19.930.WH

IN_LINE TUB M P 200 ZOOM




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0529.13.930.XX.***	13	3000	>90	615-1040
06.0529.13.940.XX.***	13	4000	>90	615-1040

LEDCE↓III∇IP2048VEXCL15°-50°Rotate

MATERIAL | AL PC

» 497

IN_LINE CONE

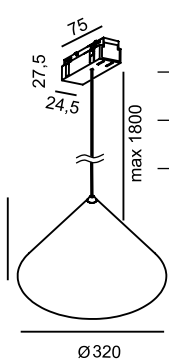

Code	Power Watt	Color T (K)	CRI	Product Lumen
06.3200.12.930.XX.***	12	3000	>90	715
06.3200.12.940.XX.***	12	4000	>90	715

LEDCE↓III∇IP2048VEXCLDIFFUSED

MATERIAL | AL PC

» 497


Color XX	Body	Adapter
BK	BK	BK
WH	WH	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI

06.0529.13.930.WH

06.0529.13.930.BK

IN_LINE DISK



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.1570.15.930.XX.***	15	3000	>90	715
06.1570.15.940.XX.***	15	4000	>90	715



MATERIAL | AL PC

» 497

Color	Body	Adapter
XX		
BK	BK	BK
BR	BR	BK

***	Options
	ON/OFF
2G	2 GROUP, ON/OFF
DALI	2 WIRED, DALI
DALI.4x	4 WIRED, DALI



06.1570.12.930.BK




06.1570.12.930.BR

OTHER COLORS TEMPERATURE ON REQUEST



IN_LINE SOL MINI P



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.7530.7.930.XX.***	6,3	3000	>90	610
06.7530.7.940.XX.***	6,3	4000	>90	610



MATERIAL | AL PC

» 497

Color XX	M RING	Adapter
BK	BK	BK
BR/BK	BR	BK
CP/BK	CP	BK
CR/BK	CR	BK
DB/BK	DB	BK
WH/BK	WH	BK

*** Options
ON/OFF
2G 2 GROUP, ON/OFF
DALI 2 WIRED, DALI
DALI.4x 4 WIRED, DALI



06.7530.7.930.BK



06.7530.7.930.BR/BK



06.7530.7.930.CP/BK



06.7530.7.930.CR/BK




06.7530.7.930.DB/BK



06.7530.7.930.WH/BK

IN_LINE SOL MINI P



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.7530.7.930.XX.***	6,3	3000	>90	610
06.7530.7.940.XX.***	6,3	4000	>90	610



MATERIAL | AL PC

» 497

Color XX	M RING GRAIN	Adapter
BKG/BK	BKG	BK
BRG/BK	BRG	BK
BZG/BK	BZG	BK
CFG/BK	CFG	BK
CPG/BK	CPG	BK
CRG/BK	CRG	BK
DBG/BK	DBG	BK
SBG/BK	SBG	BK
WHG/BK	WHG	BK

*** Options
ON/OFF
2G 2 GROUP, ON/OFF
DALI 2 WIRED, DALI
DALI.4x 4 WIRED, DALI



06.7530.7.930.BKG/BK



06.7530.7.930.BRG/BK



06.7530.7.930.BZG/BK



06.7530.7.930.CFG/BK



06.7530.7.930.CPG/BK



06.7530.7.930.CRG/BK



06.7530.7.930.DBG/BK



06.7530.7.930.SBG/BK





06.7530.7.930.WHG/BK



SERIES LUMINAIRES IN_LINE TUNABLE WHITE

The IN_LINE TRACK series features luminaires with Tunable White (TW) color temperature and brightness control technology from 2700K to 6500K. Dimming and color temperature changes are controlled separately from each other.

IN_LINE LINEA 205 TW





Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2050.6.TW.XX	6	2700 - 6500	>90	419-435

LED CE IP20 48V EXCL opal 2700-6500K TUNABLE WHITE WIZ

MATERIAL | AL PC

i » 497

IN_LINE LINEA 407 TW




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.4070.11.TW.XX	11	2700 - 6500	>90	733-834

LED CE IP20 48V EXCL opal 2700-6500K TUNABLE WHITE WIZ

MATERIAL | AL PC

i » 497

IN_LINE COMFORT 205 TW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2051.10.TW.XX	10	2700 - 6500	>90	563-632

LED CE IP20 48V EXCL 20° 2700-6500K TUNABLE WHITE WIZ



MATERIAL | AL PC

i » 497

Color	Body
XX	
BK	BK ■
WH	WH □



IN_LINE COMFORT B 205 TW




Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2052.10.TW.XX	10	2700 - 6500	>90	563-632

LED CE IP20 48V EXCL 20° 2700-6500K TUNABLE WHITE WIZ

MATERIAL | AL PC

i » 497

IN_LINE LINEA B 205 TW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.2053.6.TW.XX	10	2700 - 6500	>90	419 - 435

LED CE IP20 48V EXCL opal 2700-6500K TUNABLE WHITE WIZ

MATERIAL | AL PC

i » 497

Color	Body
XX	
BK	BK ■
WH	WH □



06.2053.6.TW.WH




06.2053.6.TW.BK



IN_LINE TUB S A 60 TW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0361.6.TW.XX	6,3	2700 - 6500	>90	393 - 454




MATERIAL | AL PC

i » 497

IN_LINE TUB M A 90 TW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0591.13.TW.XX	13	2700 - 6500	>90	840 - 994



MATERIAL | AL PC

i » 497

Color	Body	Adapter
XX	BK	BK
BK	BK	BK
WH	WH	BK



06.0361.6.TW.BK




06.0591.13.TW.BK

IN_LINE TUB M A 140 TW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0514.18.TW.XX	18	2700 - 6500	>90	1140 - 1386



MATERIAL | AL PC

i » 497

ACCESSORIES

Shield TUB M Copper	06.A05SH.CP
Shield TUB M Brass	06.A05SH.BR
Shield L TUB M Copper	06.A05SHL.CP
Shield L TUB M Brass	06.A05SHL.BR
Wall washer	06.A05WW
Snoot, black	06.A05NB
Foggy cover	06.A05FG
Honeycomb	06.A05HC
Elips diffuser	06.A05ELPS
Foggy diffuser	06.A05SFT
Lens 15°	06.A05LS15
Lens 50°	06.A05LS50

i » 492




06.0514.18.TW.WH



06.0514.18.TW.BK

Color	Body	Adapter
XX	BK	BK
BK	BK	BK
WH	WH	BK

IN_LINE SOL TW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.9533.13.TW.XX	13	2700 - 6500	>90	881-1025

LED

CE

IP20

48V

EXCL

24°

Tilt

Rotate

2700-6500K
TUNABLE WHITE

WIZ

MATERIAL |

AL

PC

i


 » 497

Color	M RING	Adapter
XX		
BK	BK	BK
BR/BK	BR	BK
CP/BK	CP	BK
CR/BK	CR	BK
DB/BK	DB	BK
WH/BK	WH	BK


06.9533.13.TW.BK


06.9533.13.TW.BR/BK


06.9533.13.TW.CP/BK



06.9533.13.TW.CR/BK


06.9533.13.TW.DB/BK


06.9533.13.TW.WH/BK



IN_LINE SOL TW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.9533.13.TW.XX	13	2700 - 6500	>90	881-1025

LED

CE

IP20


48V

WIZ

MATERIAL | AL PC


» 497

Color	M RING	GRAIN	Adapter
XX			
BKG/BK	BKG		BK
BRG/BK	BRG		BK
BZG/BK	BZG		BK
CFG/BK	CFG		BK
CPG/BK	CPG		BK
CRG/BK	CRG		BK
DBG/BK	DBG		BK
SBG/BK	SBG		BK
WHG/BK	WHG		BK

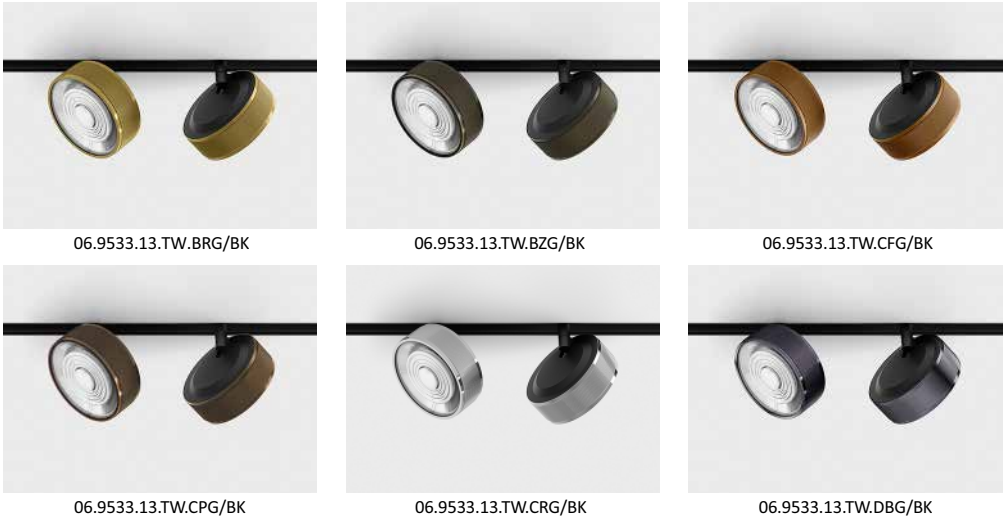

IN_LINE TUB S P 600 TW

NEW



Code	Power Watt	Color T (K)	CRI	Product Lumen
06.0360.8.TW.XX.***	8	2700 - 6500	>90	393-454



MATERIAL | AL PC


i » 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

i » 492

Color	Body	Adapter
XX		
BK	BK ■ BK ■	
WH	WH □ BK ■	





06.0360.8.TW.BK



06.0360.8.TW.WH

OTHER COLORS TEMPERATURE ON REQUEST

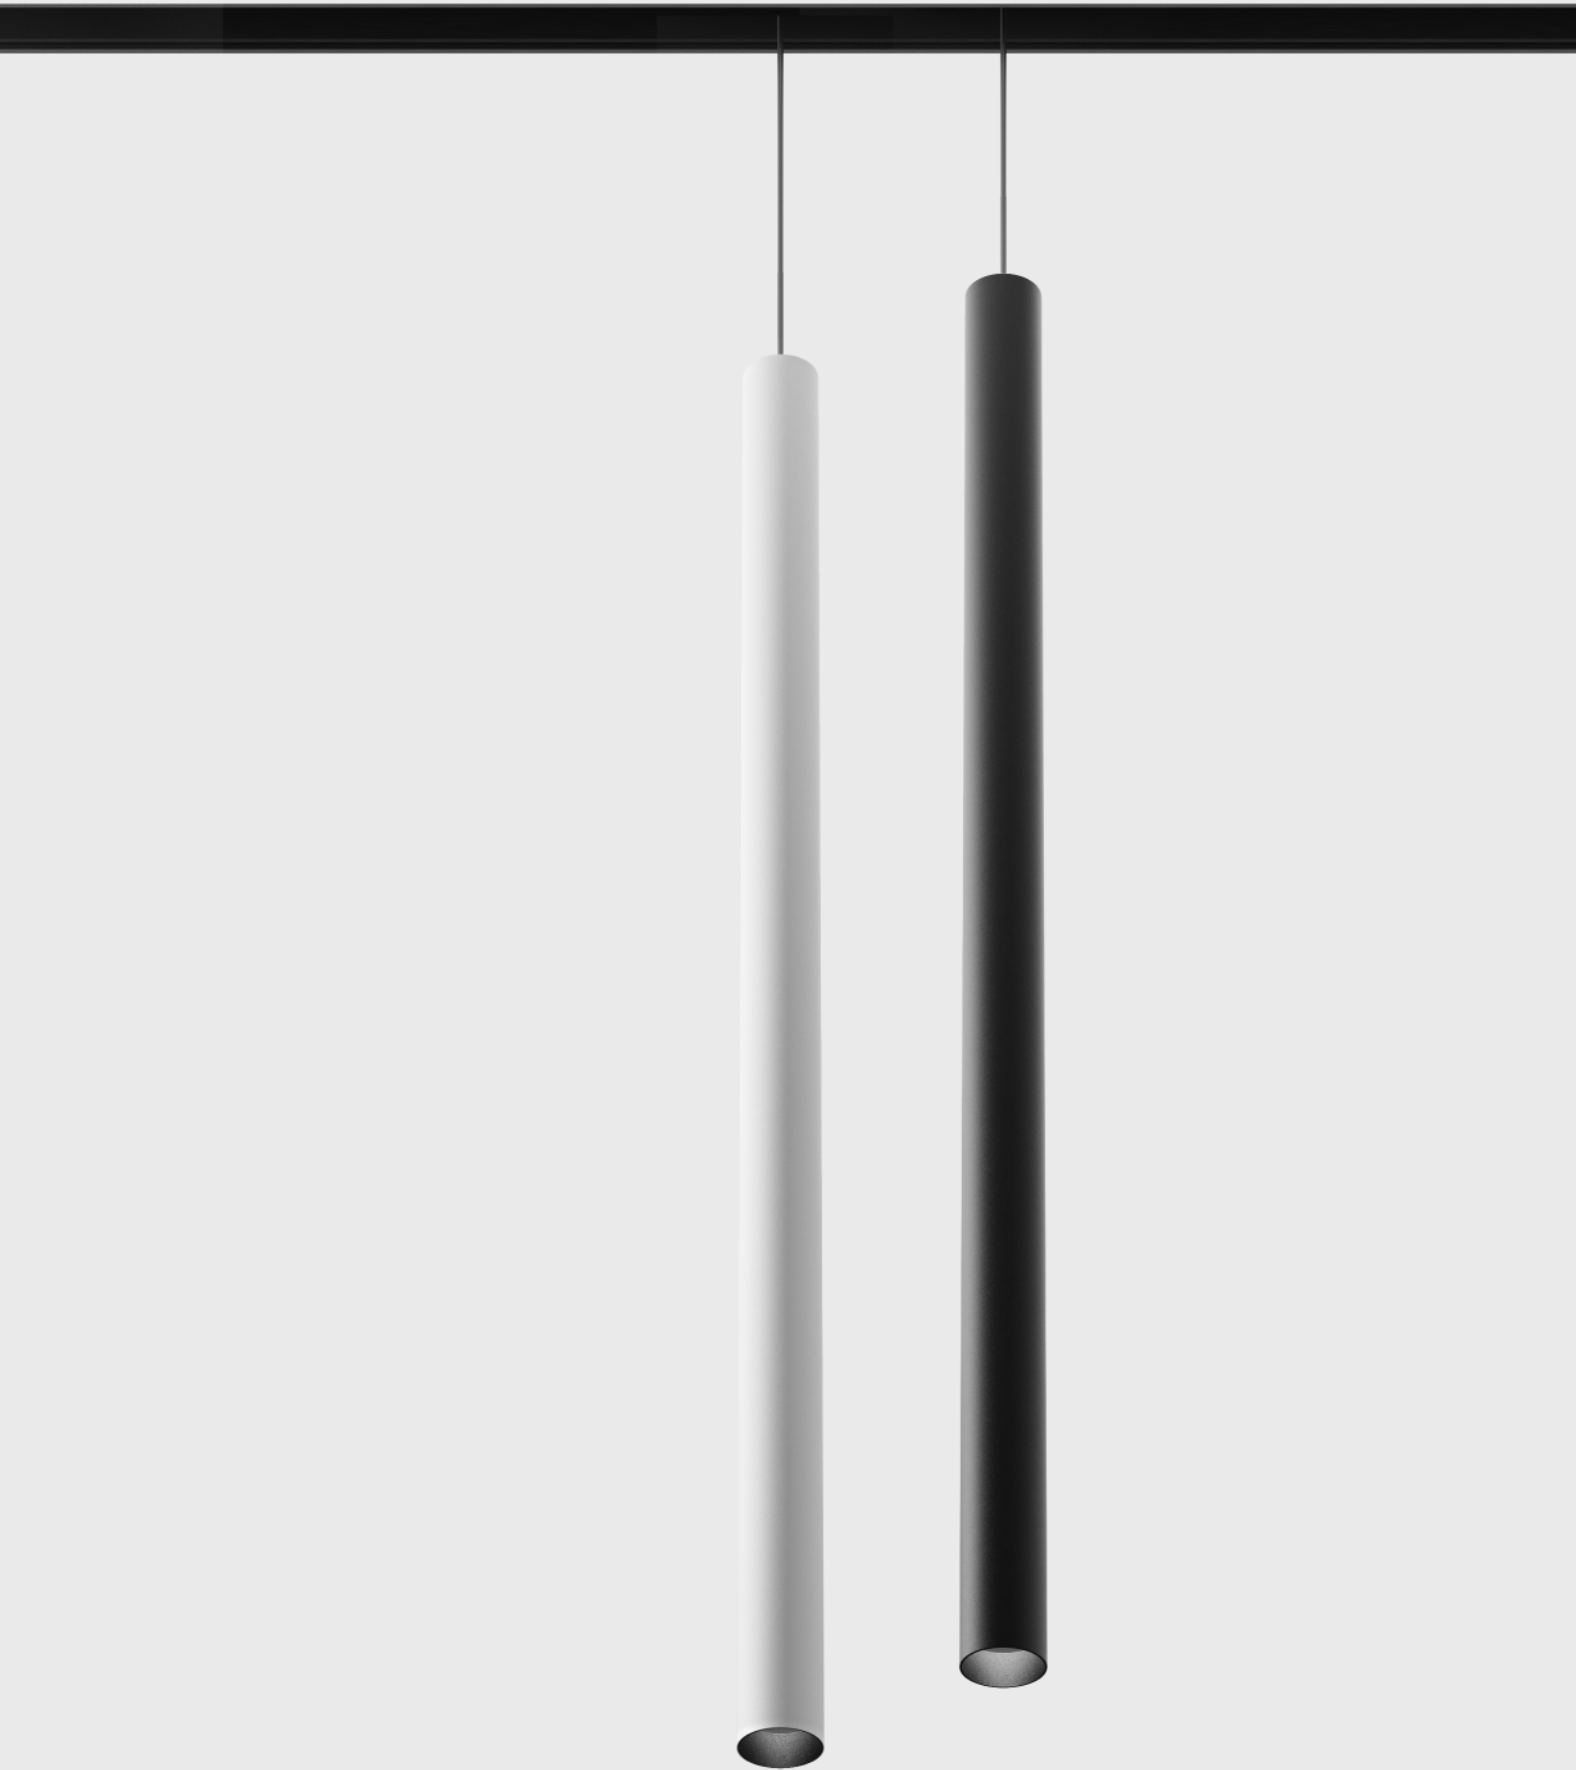

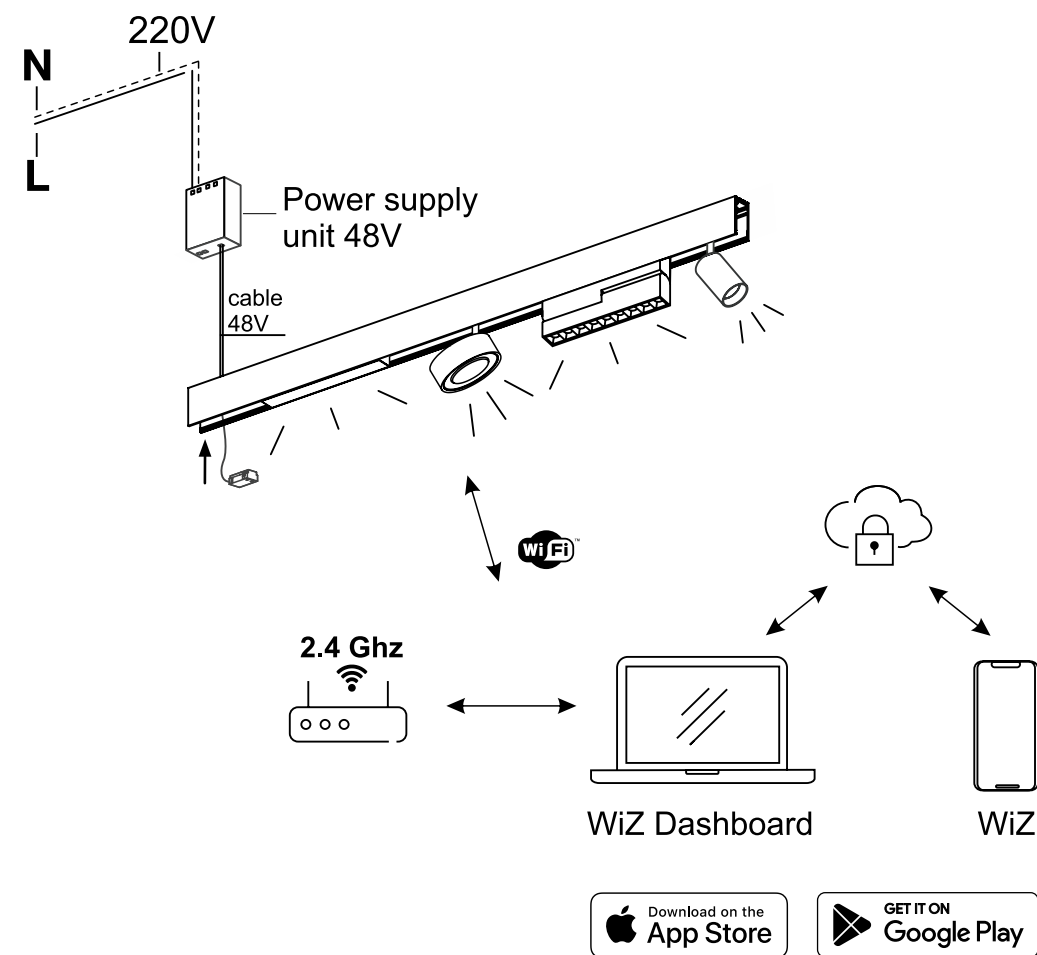

Connected App is a smartphone and tablet app that allows you to control lighting installed on WIZ devices.

To get started with the WIZ app, you'll need to:

- Install WIZ lamps or fixtures in your home or office.
- They should be connected to Wi-Fi.
- Download the WIZ Connected App on your smartphone or tablet. The app is available for free on iOS and Android devices.
- Register on the app and set up your account.

After registration, you'll be prompted to add all the WIZ devices you want to control to the app. You can do this by following the instructions in the app.



2700K



3000K



4000K





6500K

IN_RING TRACK SYSTEM



IN_RING TRACK R





MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Recessed track	09.R100.WH	1000 x 58 x 54	White
	09.R100.BK	1000 x 58 x 54	Black
Track consists of 2 parts			

IN_RING TRACK R






MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Recessed track	09.R200.WH	2000 x 58 x 54	White
	09.R200.BK	2000 x 58 x 54	Black
Track consists of 3 parts			

IN_RING TRACK R





MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Recessed track	09.R300.WH	3000 x 58 x 54	White
	09.R300.BK	3000 x 58 x 54	Black
Track consists of 4 parts			



IN_RING 200





	Code	Dimensions (mm): LxWxH	Color
Suspended track Included: suspension - 6 pcs, mechanical connector - 3 pcs.	09.C200.WH	2000 x 30 x 54	White
	09.C200.BK	2000 x 30 x 54	Black
Track consists of 3 parts			

MATERIAL | AL

» 497

IN_RING 300





	Code	Dimensions (mm): LxWxH	Color
Suspended track Included: suspension - 8 pcs, mechanical connector - 4 pcs.	09.C300.WH	3000 x 30 x 54	White
	09.C300.BK	3000 x 30 x 54	Black
Track consists of 6 parts			

MATERIAL | AL

» 497


IN_RING 500




	Code	Dimensions (mm): LxWxH	Color
Suspended track Included: suspension - 16 pcs, mechanical connector - 8 pcs.	09.C500.WH	5000 x 30 x 54	White
	09.C500.BK	5000 x 30 x 54	Black
Track consists of 8 parts			

MATERIAL | AL


» 497



09.C200.WH




09.C300.WH



09.C500.WH

IN_RING LIVE END 600




	Code	Dimensions (mm): LxWxH	Color
Feed cable	09.CLE60.WH	600	White
	09.CLE60.BK	600	Black

MATERIAL | PC

» 497

IN_RING LIVE END 1500




	Code	Dimensions (mm): LxWxH	Color
Feed cable	09.CLE150.WH	1500	White
	09.CLE150.BK	1500	Black

MATERIAL | PC

» 497

IN_LINE ELECTRICAL JOINT FLEX




	Code	Color
Electrical joint flex connector for tack	09.C2LE60.WH	White
	09.C2LE60.BK	Black


MATERIAL | PC

» 497



INSTALLATION RECESSED TRACK
SYSTEM IN_RING TRACK R 100

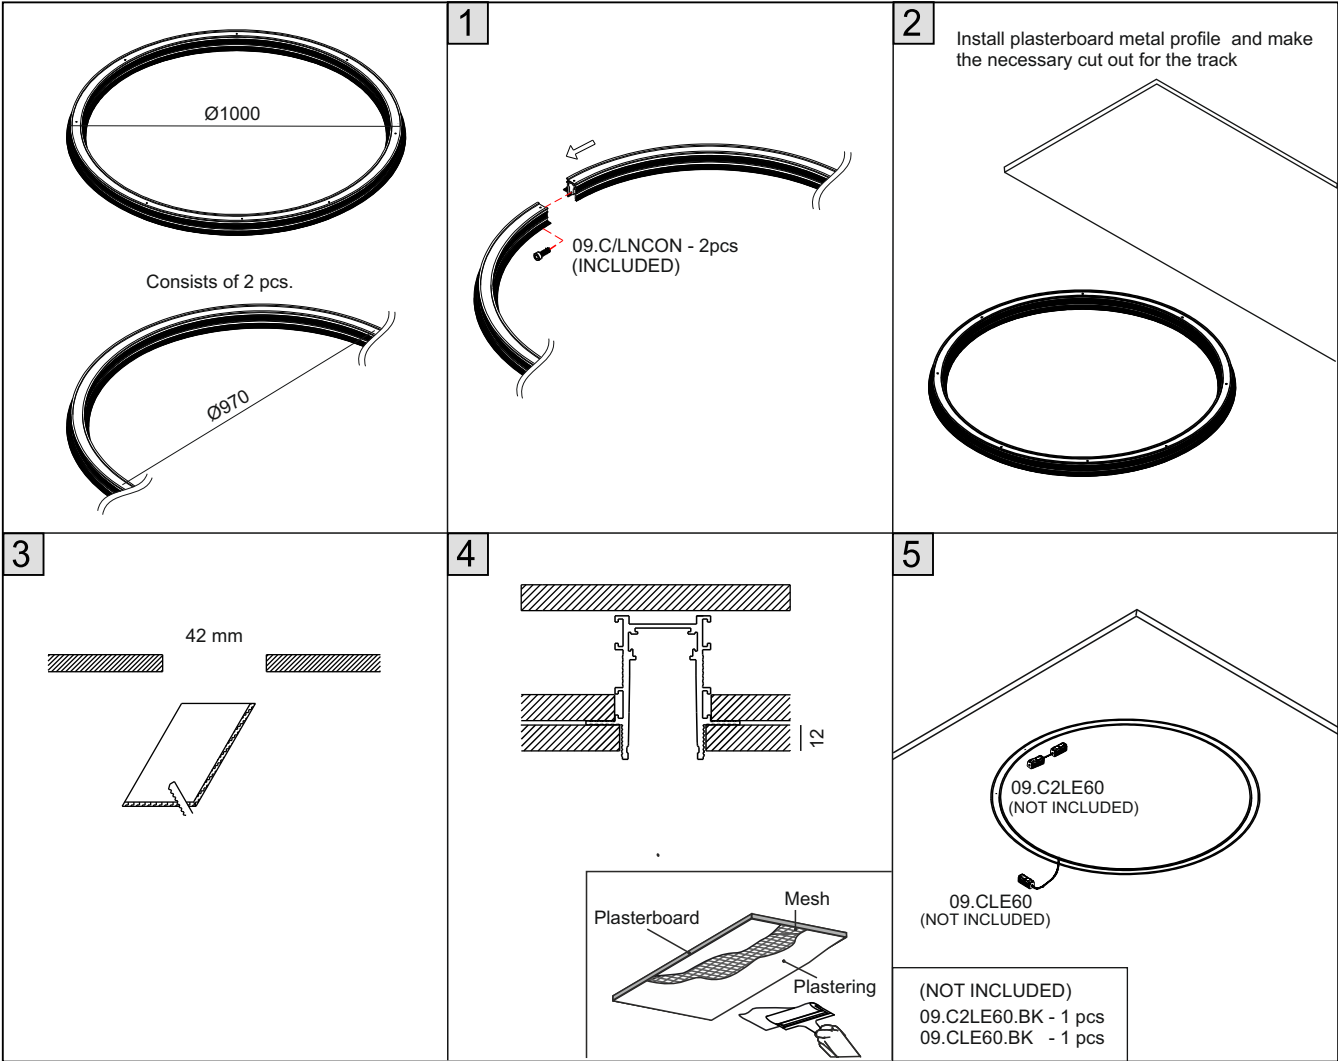

INSTALLATION SUSPENDED
SYSTEM IN_RING 200

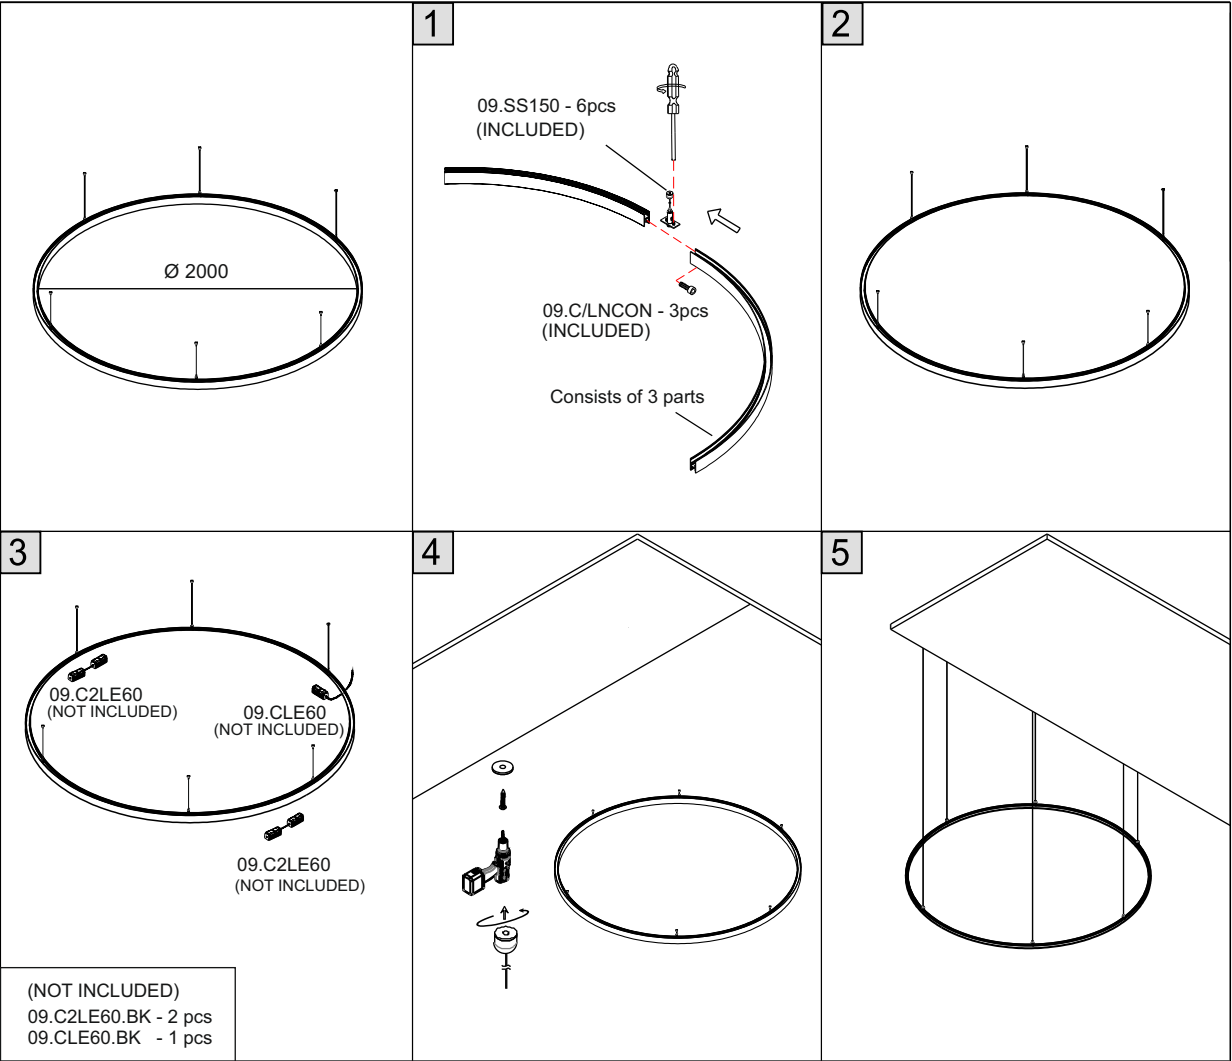

IN_RING FLEXY LINEA





Code	Power Watt	Color T (K)	CRI	Product Lumen
09.4805.6.930.XX.***	6	3000	>90	514
09.4805.6.940.XX.***	6	4000	>90	539



MATERIAL | AL PC [i](#) » 497

IN_RING FLEXY LINEA





Code	Power Watt	Color T (K)	CRI	Product Lumen
09.4810.12.930.XX.***	12	3000	>90	1028
09.4810.12.940.XX.***	12	4000	>90	1079



MATERIAL | AL PC [i](#) » 497

IN_RING FLEXY LINEA




Code	Power Watt	Color T (K)	CRI	Product Lumen
09.4820.25.930.XX.***	25	3000	>90	2286
09.4820.25.940.XX.***	25	4000	>90	2403




MATERIAL | AL PC [i](#) » 497

Color	Body	Adapter
XX		
BK	WH ☐ BK ☒	
WH	WH ☐ WH ☐	

IN_RING FLEXY LINEA




Code	Power Watt	Color T (K)	CRI	Product Lumen
09.4830.36.930.XX.***	36	3000	>90	3086
09.4830.36.940.XX.***	36	4000	>90	3086




MATERIAL | AL PC

» 497

IN_RING FLEXY LINEA




Code	Power Watt	Color T (K)	CRI	Product Lumen
09.4840.50.930.XX.***	50	3000	>90	4114
09.4840.50.940.XX.***	50	4000	>90	4319




MATERIAL | AL PC

» 497

IN_RING FLEXY LINEA



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.4850.62.930.XX.***	62	3000	>90	4626
09.4850.62.940.XX.***	62	4000	>90	4857



MATERIAL | AL PC


» 497

Color	Body	Adapter
XX		
BK	WH ☐ BK ☒	
WH	WH ☐ WH ☐	

IN_RING COMFORT 192



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.1921.7.930.XX.***	6	3000	>90	612
09.1921.7.940.XX.***	6	4000	>90	612




MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK ☒
WH	WH ☐

IN_RING TUB S A 60



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0361.7.930.XX.***	5,4	3000	>90	535
09.0361.7.940.XX.***	5,4	4000	>90	535

LED

CE

↓

III

F

IP20

48V

EXCL

50°

Tilt

Rotate

MATERIAL |

AL

PC

i

 » 497

ACCESSORIES

Honeycomb

06.A03HC

Lens 24°

06.A03LS24

i

 » 492

Color	Body	Adapter
XX		
BK	BK	BK
BR/BK	BR	BK
BZ/BK	BZ	BK
CR/BK	CR	BK
DB/BK	DB	BK
MN/BK	MN	BK
SB/BK	SB	BK
WH	WH	BK
WHW	WH	WH

09.0361.7.930.BK

09.0361.7.930.BR/BK

09.0361.7.930.BZ/BK

09.0361.7.930.CR/BK


09.0361.7.930.DB/BK

09.0361.7.930.MN/BK


09.0361.7.930.SB/BK

09.0361.7.930.WH

09.0361.7.930.WHW

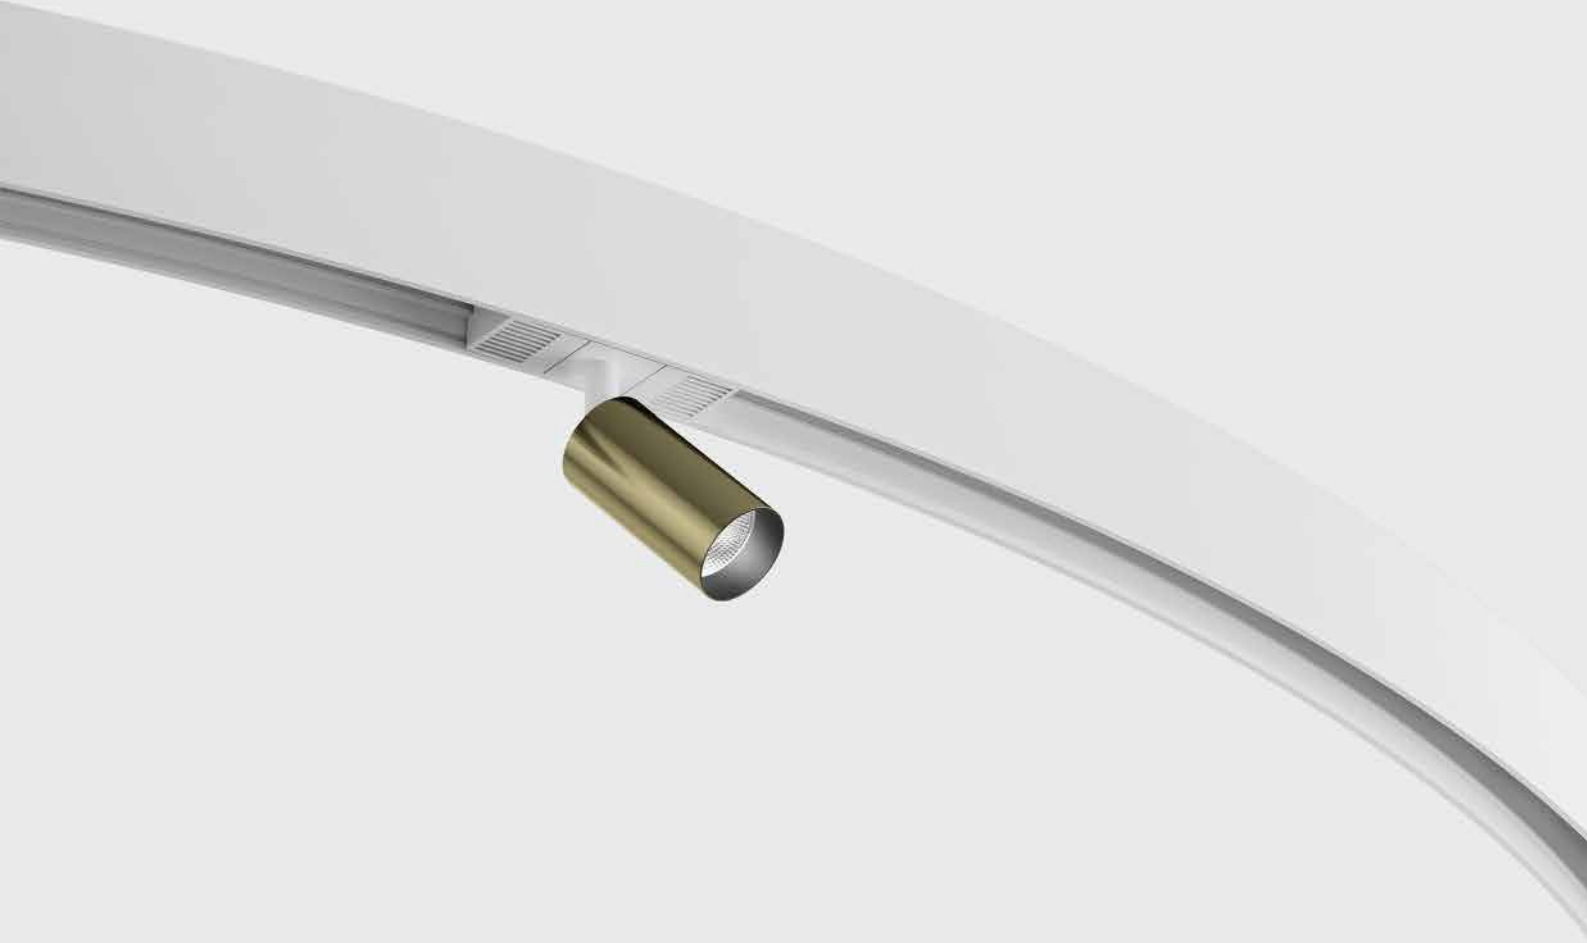

IN_RING TUB M A 90



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0591.13.930.XX.***	10,8	3000	>90	1120
09.0591.13.940.XX.***	10,8	4000	>90	1120

LEDCE

IP2048V

EXCL

50°

Tilt

Rotate

MATERIAL | ALPC

i » 497

ACCESSORIES

	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

i » 492

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG

i » 492

Color	Body	Adapter
XX		
BK	BK	BK
BR/BK	BR	BK
BZ/BK	BZ	BK
CR/BK	CR	BK
DB/BK	DB	BK
MN/BK	MN	BK
SB/BK	SB	BK
WH	WH	BK
WHW	WH	WH



09.0591.13.930.BK



09.0591.13.930.BR/BK



09.0591.13.930.BZ/BK



09.0591.13.930.CR/BK



09.0591.13.930.DB/BK



09.0591.13.930.MN/BK



09.0591.13.930.SB/BK




09.0591.13.930.WH



09.0591.13.930.WHW

IN_RING TUB M A 140



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0514.19.930.XX.***	19	3000	>90	1970
09.0514.19.940.XX.***	19	4000	>90	1970

LEDCE

IP2048V

EXCL

50°

Tilt

Rotate

MATERIAL | ALPC

i » 497

ACCESSORIES

	Honeycomb	06.A05HC
	Elips diffuser	06.A05ELPS
	Foggy diffuser	06.A05SFT
	Lens 15°	06.A05LS15
	Lens 30°	06.A05LS30

i » 492

ACCESSORIES

	Shield TUB M Copper	06.A05SH.CP
	Shield TUB M Brass	06.A05SH.BR
	Shield L TUB M Copper	06.A05SHL.CP
	Shield L TUB M Brass	06.A05SHL.BR
	Wall washer	06.A05WW
	Snoot, black	06.A05NB
	Foggy cover	06.A05FG

i » 492

Color	Body	Adapter
XX		
BK	BK	BK
BR/BK	BR	BK
BZ/BK	BZ	BK
CR/BK	CR	BK
MN/BK	MN	BK
SB/BK	SB	BK
WH	WH	BK
WHW	WH	WH



09.0514.19.930.BK



09.0514.19.930.BR/BK



09.0514.19.930.BZ/BK



09.0514.19.930.SB/BK



09.0514.19.930.MN/BK




09.0514.19.930.WHW

IN_RING ZOOM S



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0369.6.930.XX.***	5,4	3000	>90	228-307
06.0369.6.940.XX.***	5,4	4000	>90	228-307



LEDCE

IP20

48V

EXCL

15°-50°

Tilt

Rotate


MATERIAL | ALPC

i » 497

IN_RING ZOOM



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0599.13.930.XX.***	13	3000	>90	615-1040
06.0599.13.940.XX.***	13	4000	>90	615-1040



LEDCE

IP20

48V

EXCL

15°-50°

Tilt

Rotate

MATERIAL | ALPC

i » 497

Color	Body	Adapter
XX		
BK	BK ■ BK ■	
WH	WH □ BK ■	
WHW	WH □ WH □	



09.0369.8.930.WH




09.0599.13.930.WH

IN_RING TUB M NB



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0595.9.930.XX.***	10	3000	>90	640
09.0595.9.940.XX.***	10	4000	>90	640



LEDCE

IP20

48V

EXCL

6°

Tilt

Rotate

MATERIAL | ALPC

i » 497



09.0595.9.930.BK





09.0595.9.930.WH



09.0595.9.930.WHW

Color	Body	Adapter
XX		
BK	BK ■ BK ■	
WH	WH □ BK ■	
WHW	WH □ WH □	

IN_RING SFERA



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.1001.5.930.XX.***	5	3000	>90	250
09.1001.5.940.XX.***	5	4000	>90	250

LED CE IP20 48V EXCL 360°

MATERIAL | AL GL

» 497


Color	Body	Adapter
XX		
BK	WH ☐ BK ☒	
WH	WH ☐ WH ☐	



IN_RING SOL MINI



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.7526.7.930.XX.***	6,3	3000	>90	610
09.7526.7.940.XX.***	6,3	4000	>90	610



LED

CE

III

IP20

48V

EXCL

38°

Tilt

Rotate

MATERIAL |

AL

PC

i

» 497

Color XX	M RING	Adapter
BK	BK	BK
BR/BK	BR	BK
CP/BK	CP	BK
CR/BK	CR	BK
DB/BK	DB	BK
WH/BK	WH	BK
WH	WH	WH
BK/WH	BK	WH
BR/WH	BR	WH
CP/WH	CP	WH
CR/WH	CR	WH
DB/WH	DB	WH

09.7526.7.930.BK

09.7526.7.930.BR/BK

09.7526.7.930.CP/BK

09.7526.7.930.CR/BK


09.7526.7.930.BK/DB

09.7526.7.930.BK/WH

IN_RING SOL MINI



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.7526.7.930.XX.***	6,3	3000	>90	610
09.7526.7.940.XX.***	6,3	4000	>90	610



LED

CE

III

IP20

48V

EXCL

38°

Tilt

Rotate

MATERIAL |

AL

PC

i

» 497

Color XX	M RING GRAIN	Adapter
BKG/BK	BKG	BK
BRG/BK	BRG	BK
BZG/BK	BZG	BK
CFG/BK	CFG	BK
CPG/BK	CPG	BK
CRG/BK	CRG	BK
DBG/BK	DBG	BK
SBG/BK	SBG	BK
WHG/BK	WHG	BK
BKG/WH	BKG	WH
BRG/WH	BRG	WH
BZG/WH	BZG	WH
CFG/WH	CFG	WH
CPG/WH	CPG	WH
CRG/WH	CRG	WH
DBG/WH	DBG	WH
SBG/WH	SBG	WH
WHG/WH	WHG	WH

09.7526.7.930.BKG/BK

09.7526.7.930.BRG/BK

09.7526.7.930.BZG/BK

09.7526.7.930.CFG/BK

09.7526.7.930.CPG/BK


09.7526.7.930.CRG/BK

09.7526.7.930.DBG/BK

09.7526.7.930.SBG/BK

09.7526.7.930.WHG/BK

IN_RING TUB S P 200



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0320.8.930.XX.***	7	3000	>90	610
09.0320.8.940.XX.***	7	4000	>90	610



MATERIAL | AL PC


» 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

» 492

IN_RING TUB S P 300



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0331.8.930.XX.***	7	3000	>90	610
09.0331.8.940.XX.***	7	4000	>90	610



MATERIAL | AL PC

» 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

» 492


Color XX	Body	Adapter
BK	BK ■ BK ■	
BR	BR ■ BK ■	
BZ	BZ ■ BK ■	
DB	DB ■ BK ■	
MN	MN ■ BK ■	
SB	SB ■ BK ■	
WH	WH □ BK ■	
WHW	WH □ WH □	



Color XX	Body	Adapter
BK	BK ■ BK ■	
BR	BR ■ BK ■	
BZ	BZ ■ BK ■	
MN	MN ■ BK ■	
SB	SB ■ BK ■	
WH	WH □ BK ■	
WHW	WH □ WH □	



IN_RING TUB S P 600



Code	Power Watt	Color T (K)	CRI	Product Lumen
09.0360.8.930.XX.***	7	3000	>90	610
09.0360.8.940.XX.***	7	4000	>90	610



MATERIAL | AL PC

» 497

ACCESSORIES

	Honeycomb	06.A03HC
	Lens 24°	06.A03LS24

» 492

Color	Body	Adapter
XX		
BK	BK	BK
BR	BR	BK
BZ	BZ	BK
MN	MN	BK
SB	SB	BK
WH	WH	BK
WHW	WH	WH




MICRO_LINE
TRACK R


MICRO_LINE
TRACK S

[TRACK SYSTEM]

MICRO_LINE TRACK

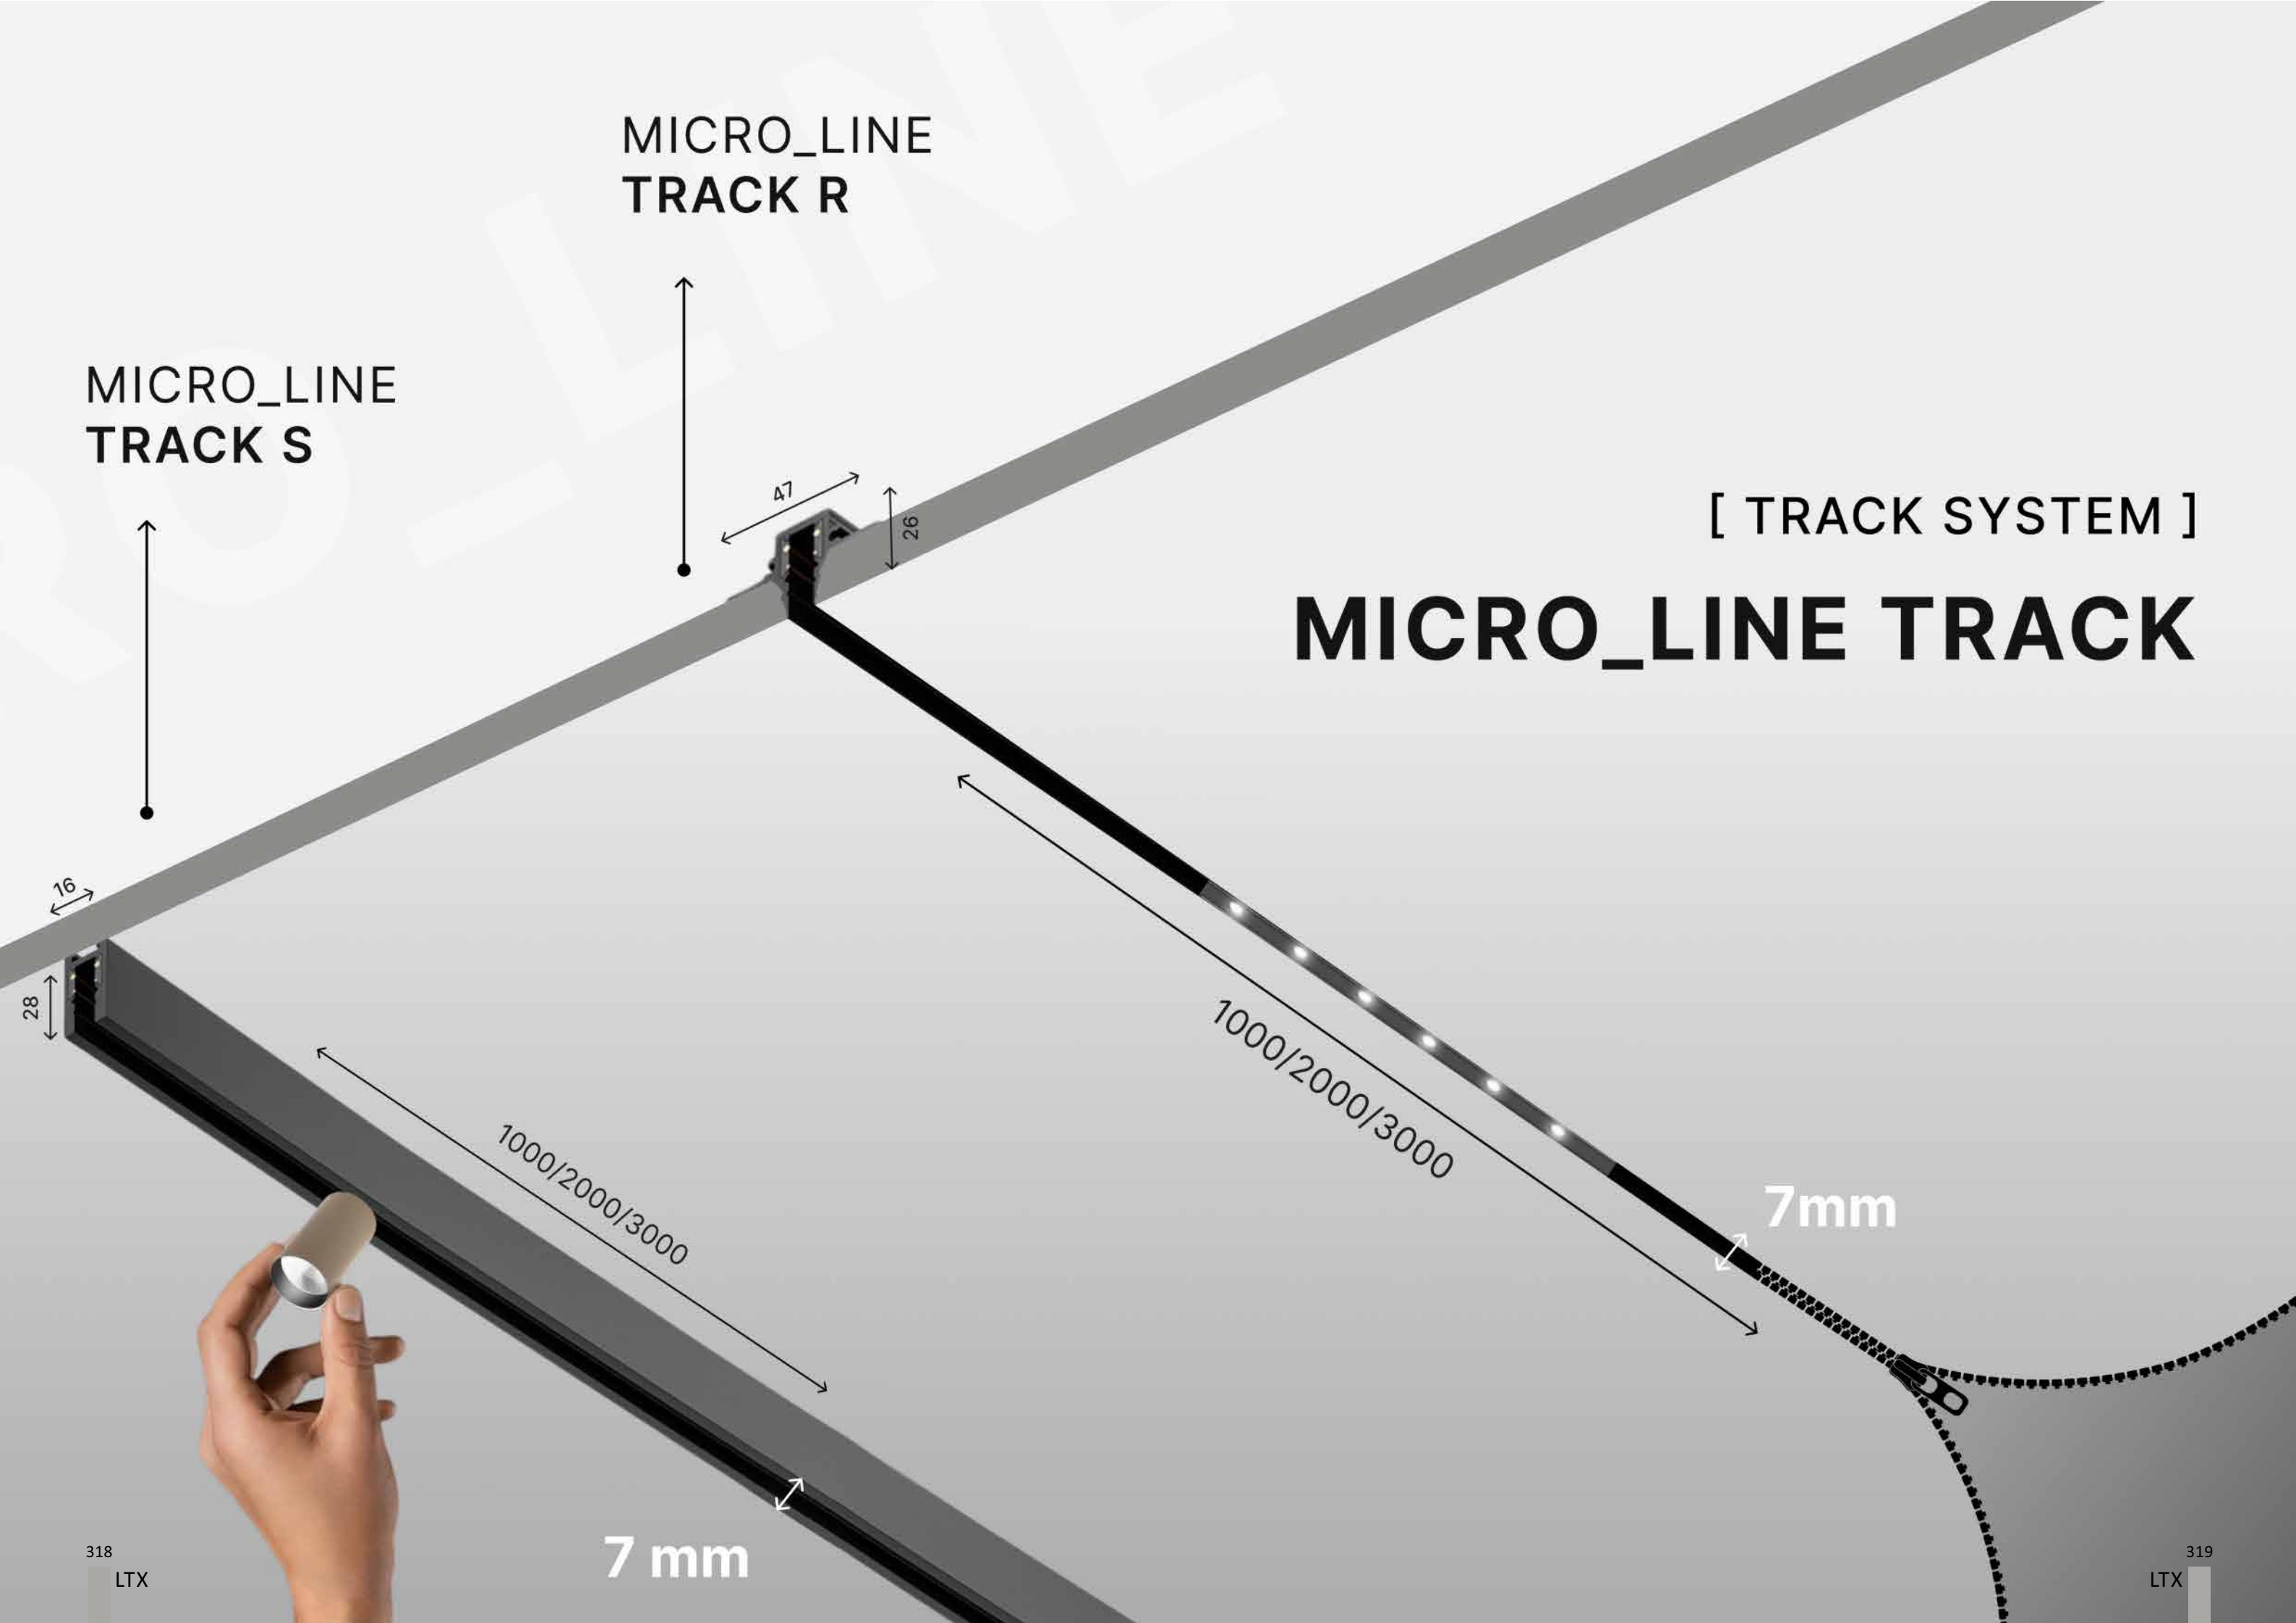

MICRO_LINE TRACK R




	Code	Dimensions (mm): LxWxH	Color
Recessed track	14.R100.BK	1000 x 47 x 26	Black
	14.R200.BK	2000 x 47 x 26	Black
	14.R300.BK	3000 x 47 x 26	Black

CE IP20 48V

MATERIAL | AL

» 497

MICRO_LINE CORNER R HR




	Code	Color
Recessed «L» track connector (2 pcs 14.R/SLNCON included)	14.R90HR.BK	Black

CE IP20 48V

MATERIAL | AL

» 497

MICRO_LINE CORNER R IN





	Code	Color
Recessed «L» connector Ceiling to Wall, in-installation (2 pcs 14.R/SLNCON included)	14.R90IN.BK	Black

CE IP20 48V

MATERIAL | AL

» 497

MICRO_LINE CORNER R OUT





	Code	Color
Recessed «L» track connector Wall to Wall out-installation (2 pcs 14.R/SLNCON included)	14.R90OUT.BK	Black

CE IP20 48V

MATERIAL | AL

» 497

MICRO_LINE END CAP R




	Code	Color
End cap for recessed track 2 pcs/set	14.R/SECAP.BK	Black

CE IP20 48V

MATERIAL | AL

» 497

MICRO_LINE TRACK S




CE EXCL

MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Surface track	14.S100.BK	1000 x 16 x 28,5	Black
	14.S200.BK	2000 x 16 x 28,5	Black
	14.S300.BK	3000 x 16 x 28,5	Black

MICRO_LINE CORNER S OUT





CE

MATERIAL | AL

» 497

	Code	Color
Surface «L» track connector – Wall to Wall out-installation (2 pcs 14.R/SLNCON included)	14.S90OUT.BK	Black

MICRO_LINE CORNER S HR





CE

MATERIAL | AL

» 497

	Code	Color
Surface «L» track connector (2 pcs 14.R/SLNCON included)	14.R90HR.BK	Black

MICRO_LINE END CAP S




CE

MATERIAL | AL

» 497

	Code	Color
End cap for surface track 2 pcs/set	14.R/SECAP.BK	Black

MICRO_LINE CORNER S IN




CE

MATERIAL | AL

» 497

	Code	Color
Surface «L» track connector Ceiling to Wall, in-installation (2 pcs 14.R/SLNCON included)	14.S90IN.BK	Black

MICRO_LINE MEC JOINT





	Code	Color
Mechanical linear connector for track	14.R/SLNCON	Black



MATERIAL |  **AL**

 » 497

MICRO_LINE LIVE END





	Code	Color
Feed cable	14.SLE60.BK	Black



MATERIAL |  **AL**

 » 497

MICRO_LINE ELECTRICAL JOINT FLEX




	Code	Color
Electrical joint live end for track, without cable	14.S2LE20.BK	Black



MATERIAL |  **AL**

 » 497

POWER SUPPLY




Code	Dimensions (mm): LxWxH	Power Watt	Color
06.PSU.100.W/O	298 x 30 x 16,5	100	Grey
06.PSU.250.W/O	384 x 30 x 22	250	Grey

 IP20 48V NODIM


MATERIAL |  **PC**

 » 497


INSTALLATION RECESSED TRACK SYSTEM MICRO_LINE TRACK R

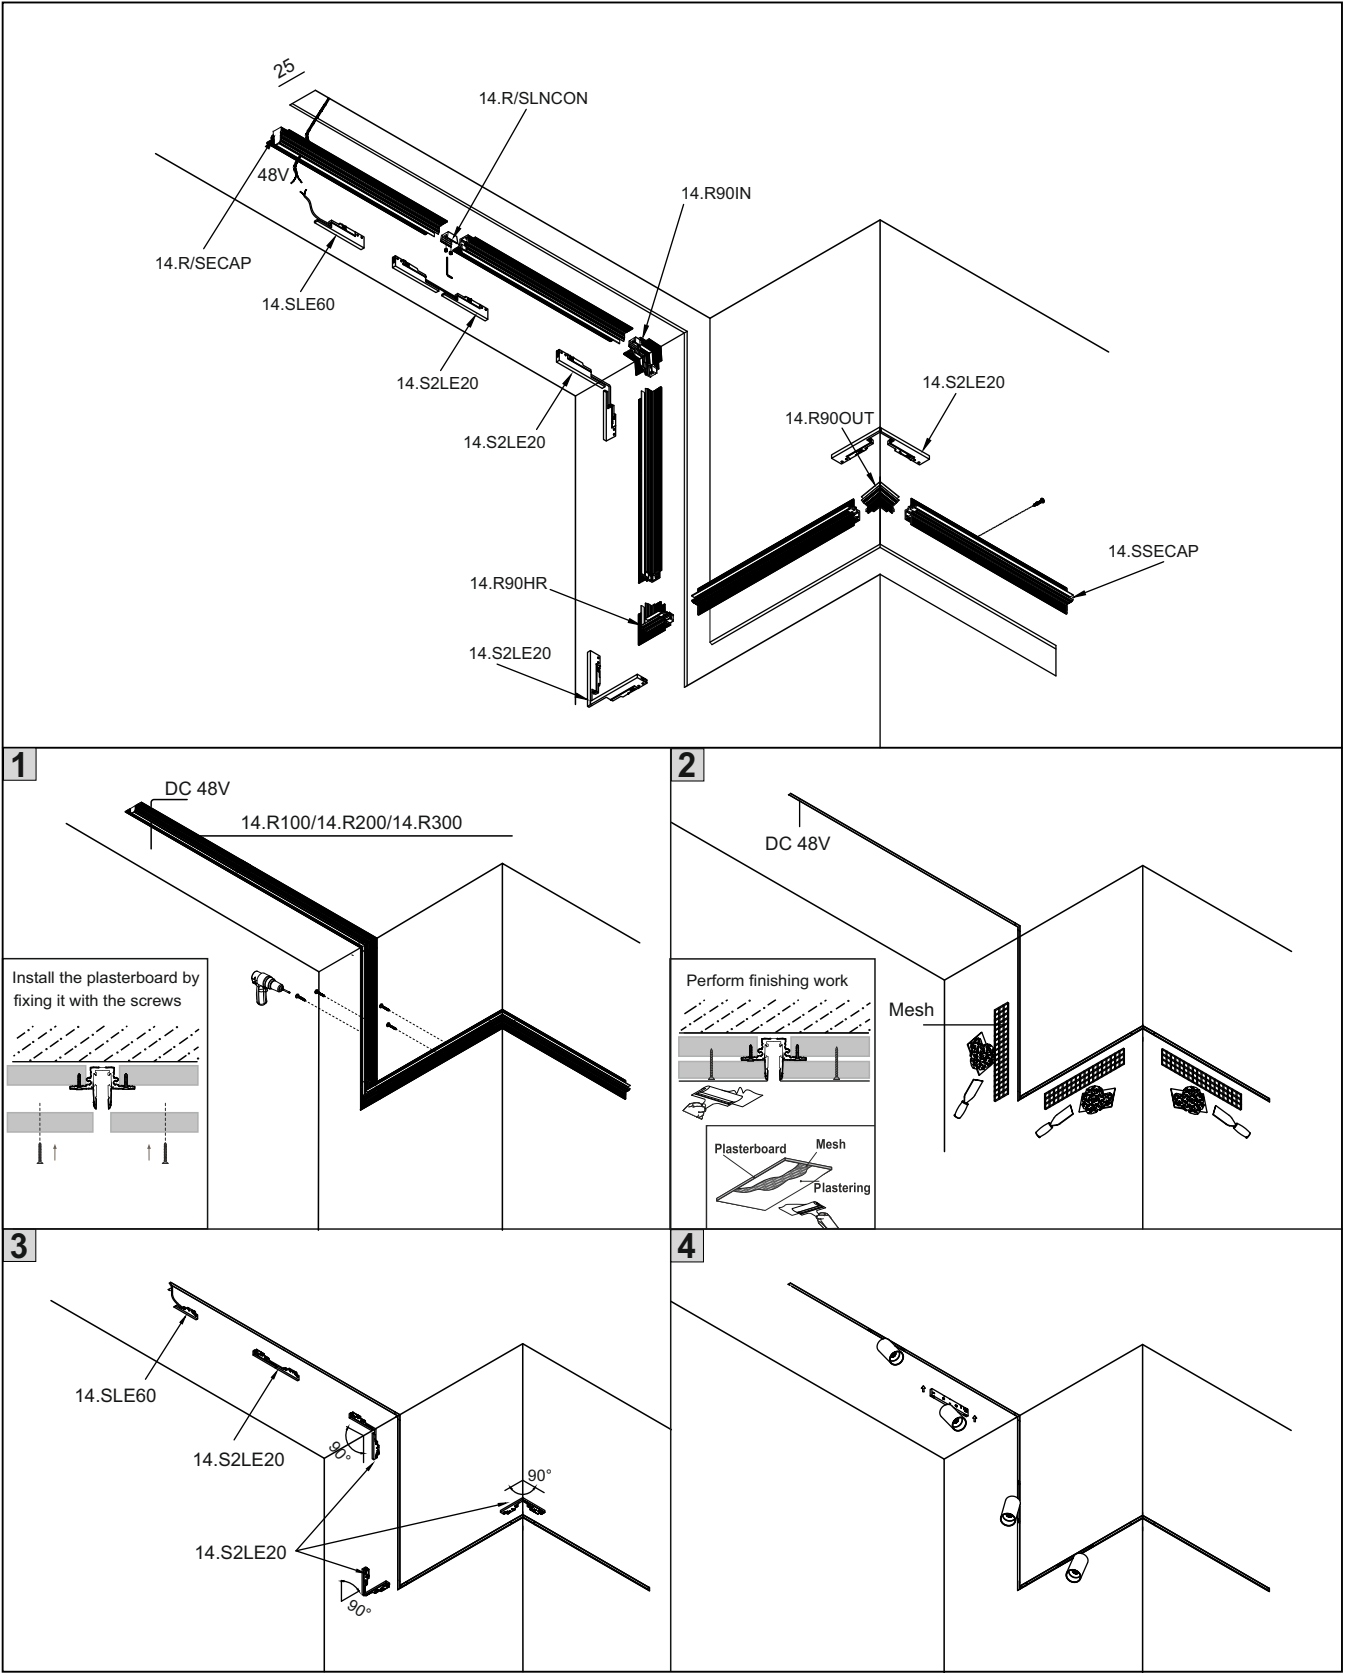



INSTALLATION SURFACE TRACK SYSTEM MICRO_LINE TRACK S

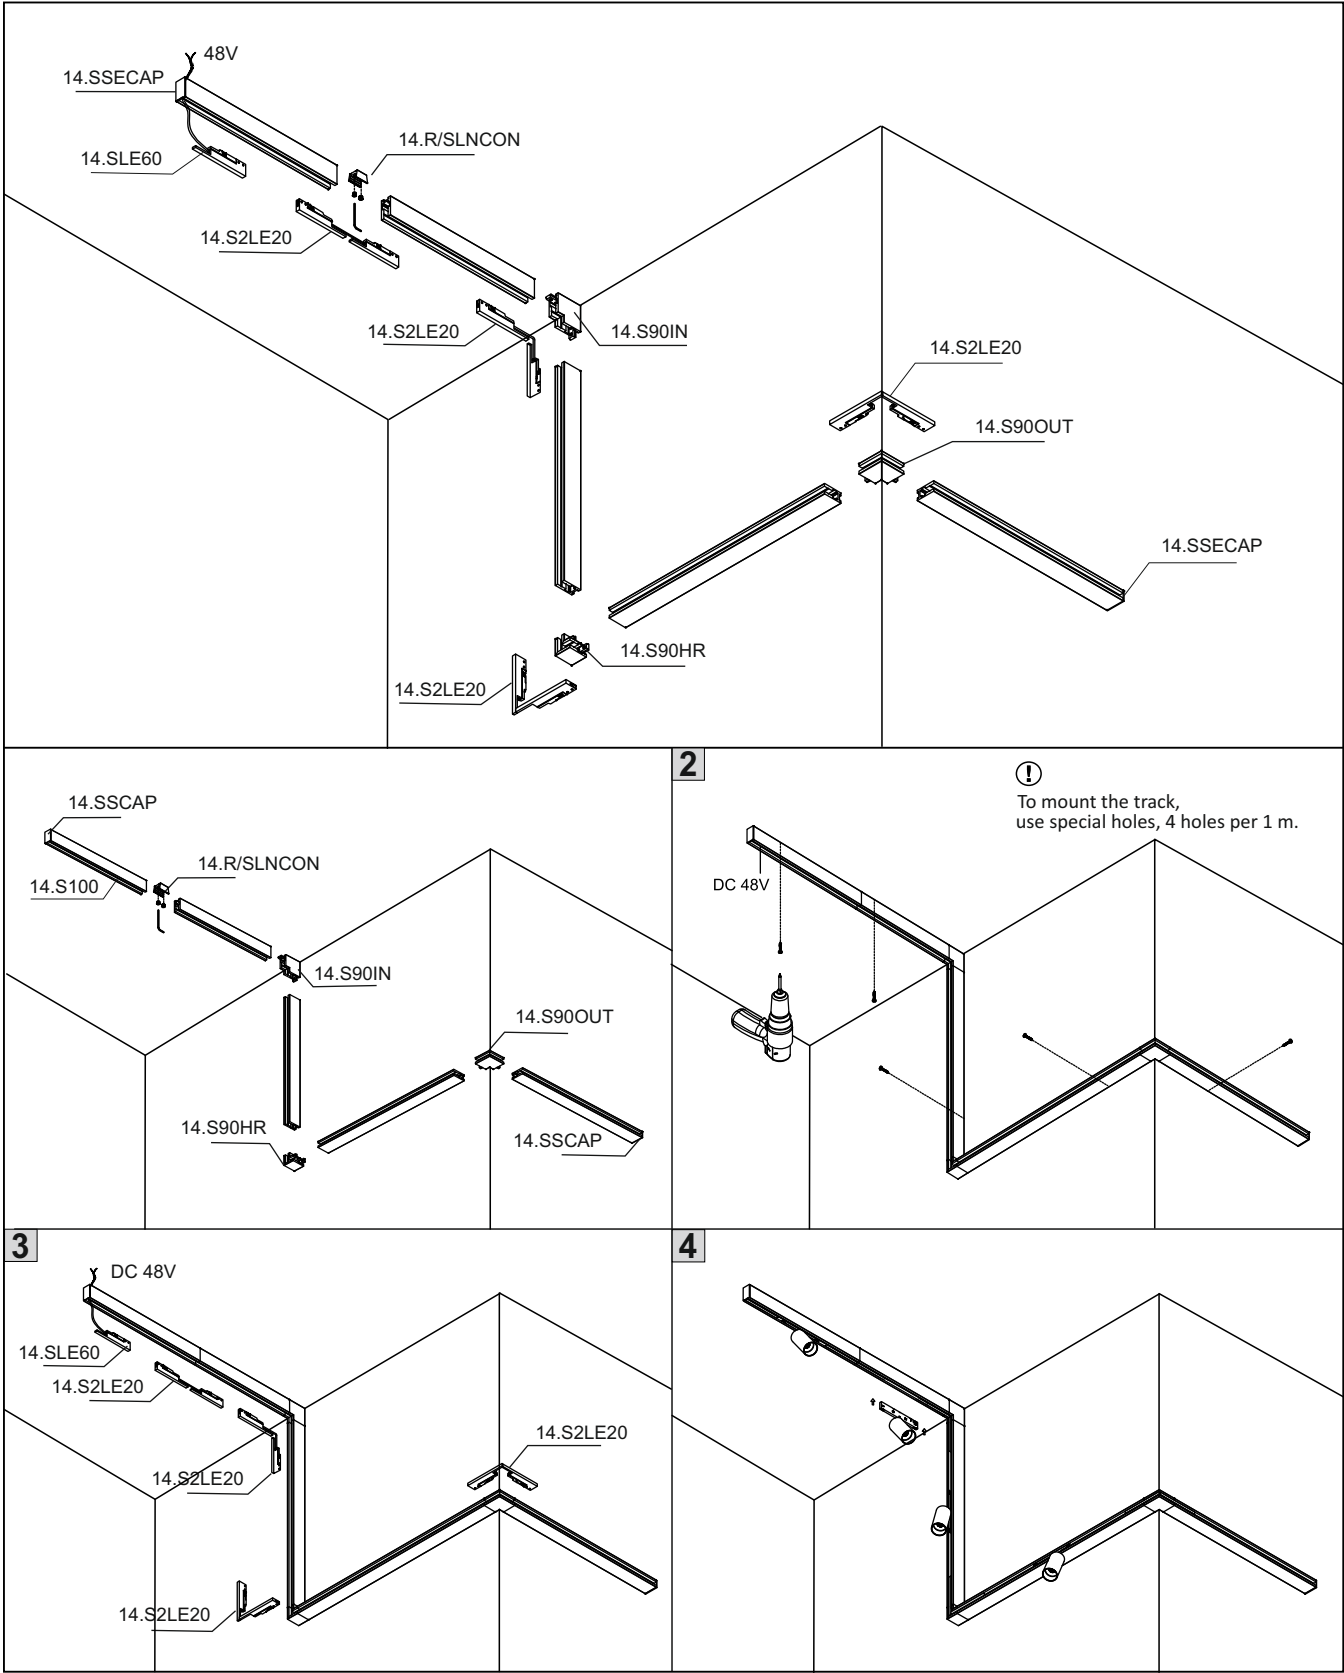

MICRO_LINE

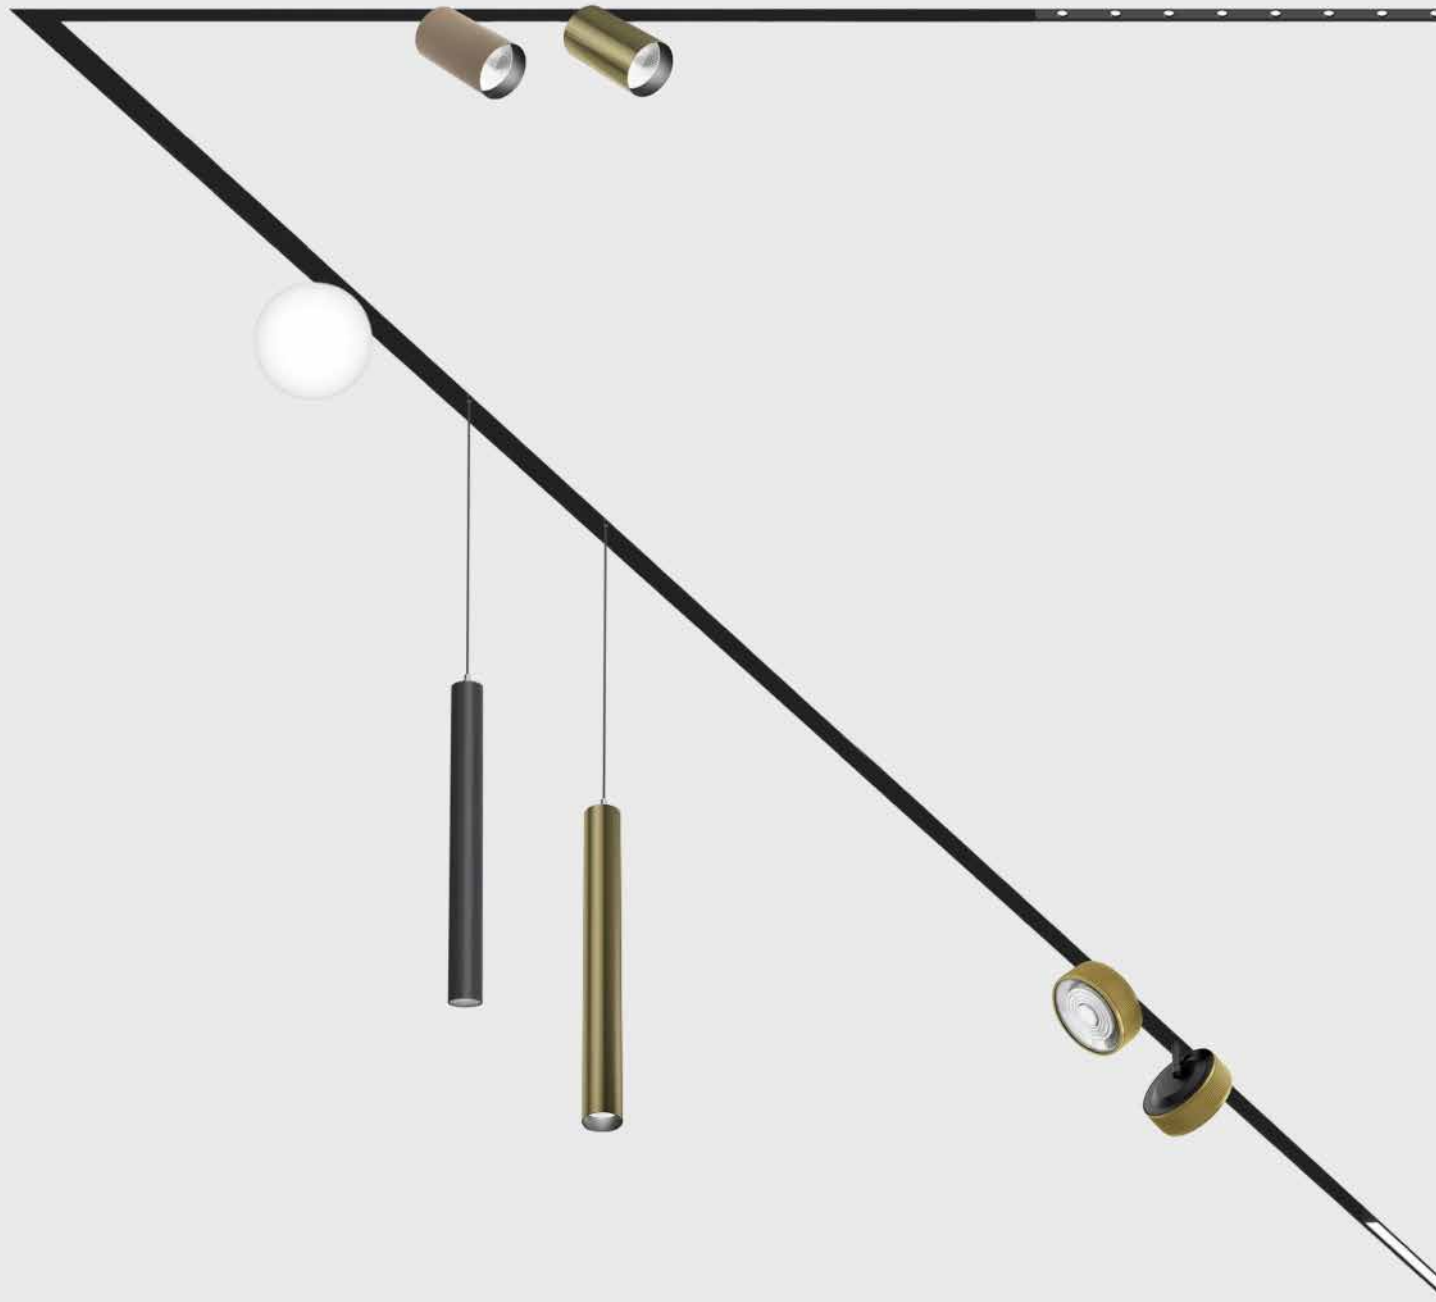

MICRO_LINE LINEA 1003




Code	Power Watt	Color T (K)	CRI	Product Lumen
14.1003.12.930.XX.***	12	3000	>90	440
14.1003.12.940.XX.***	12	4000	>90	448

LED CE IP20 48V EXCL 113°

MATERIAL | AL PC

i » 497

MICRO_LINE COMFORT 300



Code	Power Watt	Color T (K)	CRI	Product Lumen
14.3001.4.930.XX.***	4	3000	>90	274
14.3001.4.940.XX.***	4	4000	>90	279


LED CE IP20 48V EXCL 76°

MATERIAL | AL PC

i » 497

Color	Body
XX	
BK	BK ■

***	Options
	ON/OFF
DALI	DIM DALI



14.1003.12.930.BK




14.3001.4.930.BK


OTHER COLORS TEMPERATURE ON REQUEST



MICRO_LINE SFERA



Code	Power Watt	Color T (K)	CRI	Product Lumen
14.1001.5.930.XX.***	4,5	3000	>90	247
14.1001.5.940.XX.***	4,5	4000	>90	247




LED CE IP20 48V EXCL 360°

MATERIAL | AL GL

i » 497


Color	XX	Body
BK	BK	■
***	Options	
	ON/OFF	
DALI	DIM DALI	




14.1001.5.930.BK



MICRO_LINE TUB S A 60



Code	Power Watt	Color T (K)	CRI	Product Lumen
14.0361.7.930.XX.***	6,3	3000	>90	649
14.0361.7.940.XX.***	6,3	4000	>90	649



MATERIAL | AL PC


i » 497

Color XX	Body
BK	BK ■
BR	BR ■
SB	SB ■
WH	WH □

***	Options
	ON/OFF
DALI	DIM DALI



MICRO_LINE TUB M A 90



Code	Power Watt	Color T (K)	CRI	Product Lumen
14.0591.11.930.XX.***	10,8	3000	>90	1040
14.0591.11.940.XX.***	10,8	4000	>90	1060



MATERIAL | AL PC

i » 497

Color XX	Body
BK	BK ■
BR	BR ■
SB	SB ■
WH	WH □

***	Options
	ON/OFF
DALI	DIM DALI



Tracklights 48V



MICRO_LINE SOL MINI

336

LTX


Tracklights 48V



337

LTX

MICRO_LINE SOL MINI



Code	Power Watt	Color T (K)	CRI	Product Lumen
14.7526.7.930.XX.***	6,3	3000	>90	580
14.7526.7.940.XX.***	6,3	4000	>90	605




MATERIAL | AL PC

» 497

Color	M RING	Body
BK	BK	BK
BR/BK	BR	BK
CP/BK	CP	BK
CR/BK	CR	BK
DB/BK	DB	BK
WH/BK	WH	BK

***	Options
	ON/OFF
DALI	DIM DALI



14.7526.7.930.BK



14.7526.7.930.BR/BK




14.7526.7.930.CP/BK



14.7526.7.930.CR/BK




14.7526.7.930.DB/BK




14.7526.7.930.WH/BK

MICRO_LINE SOL MINI



Code	Power Watt	Color T (K)	CRI	Product Lumen
14.7526.7.930.XX.***	6,3	3000	>90	580
14.7526.7.940.XX.***	6,3	4000	>90	605




MATERIAL | AL PC

» 497

Color	M RING	GRAIN	Body
BKG/BK	BKG		BK
BRG/BK	BRG		BK
BZG/BK	BZG		BK
CFG/BK	CFG		BK
CPG/BK	CPG		BK
CRG/BK	CRG		BK
DBG/BK	DBG		BK
SBG/BK	SBG		BK
WHG/BK	WHG		BK

***	Options
	ON/OFF
DALI	DIM DALI



14.7526.7.930.BKG/BK



14.7526.7.930.BRG/BK



14.7526.7.930.BZG/BK



14.7526.7.930.CFG/BK



14.7526.7.930.CPG/BK



14.7526.7.930.CRG/BK



14.7526.7.930.DBG/BK




14.7526.7.930.SBG/BK



14.7526.7.930.WHG/BK

MICRO_LINE TUB S P 300



Code	Power Watt	Color T (K)	CRI	Product Lumen
14.0330.7.930.XX.***	7	3000	>90	649
14.0330.7.940.XX.***	7	4000	>90	680

LED CE IP20 48V EXCL 36°

MATERIAL | AL PC

» 497


Color	Body
XX	
BK	BK
BR	BR
BZ	BZ
SB	SB
WH	WH

***	Options
	ON/OFF
DALI	DIM DALI






AIR SYSTEM

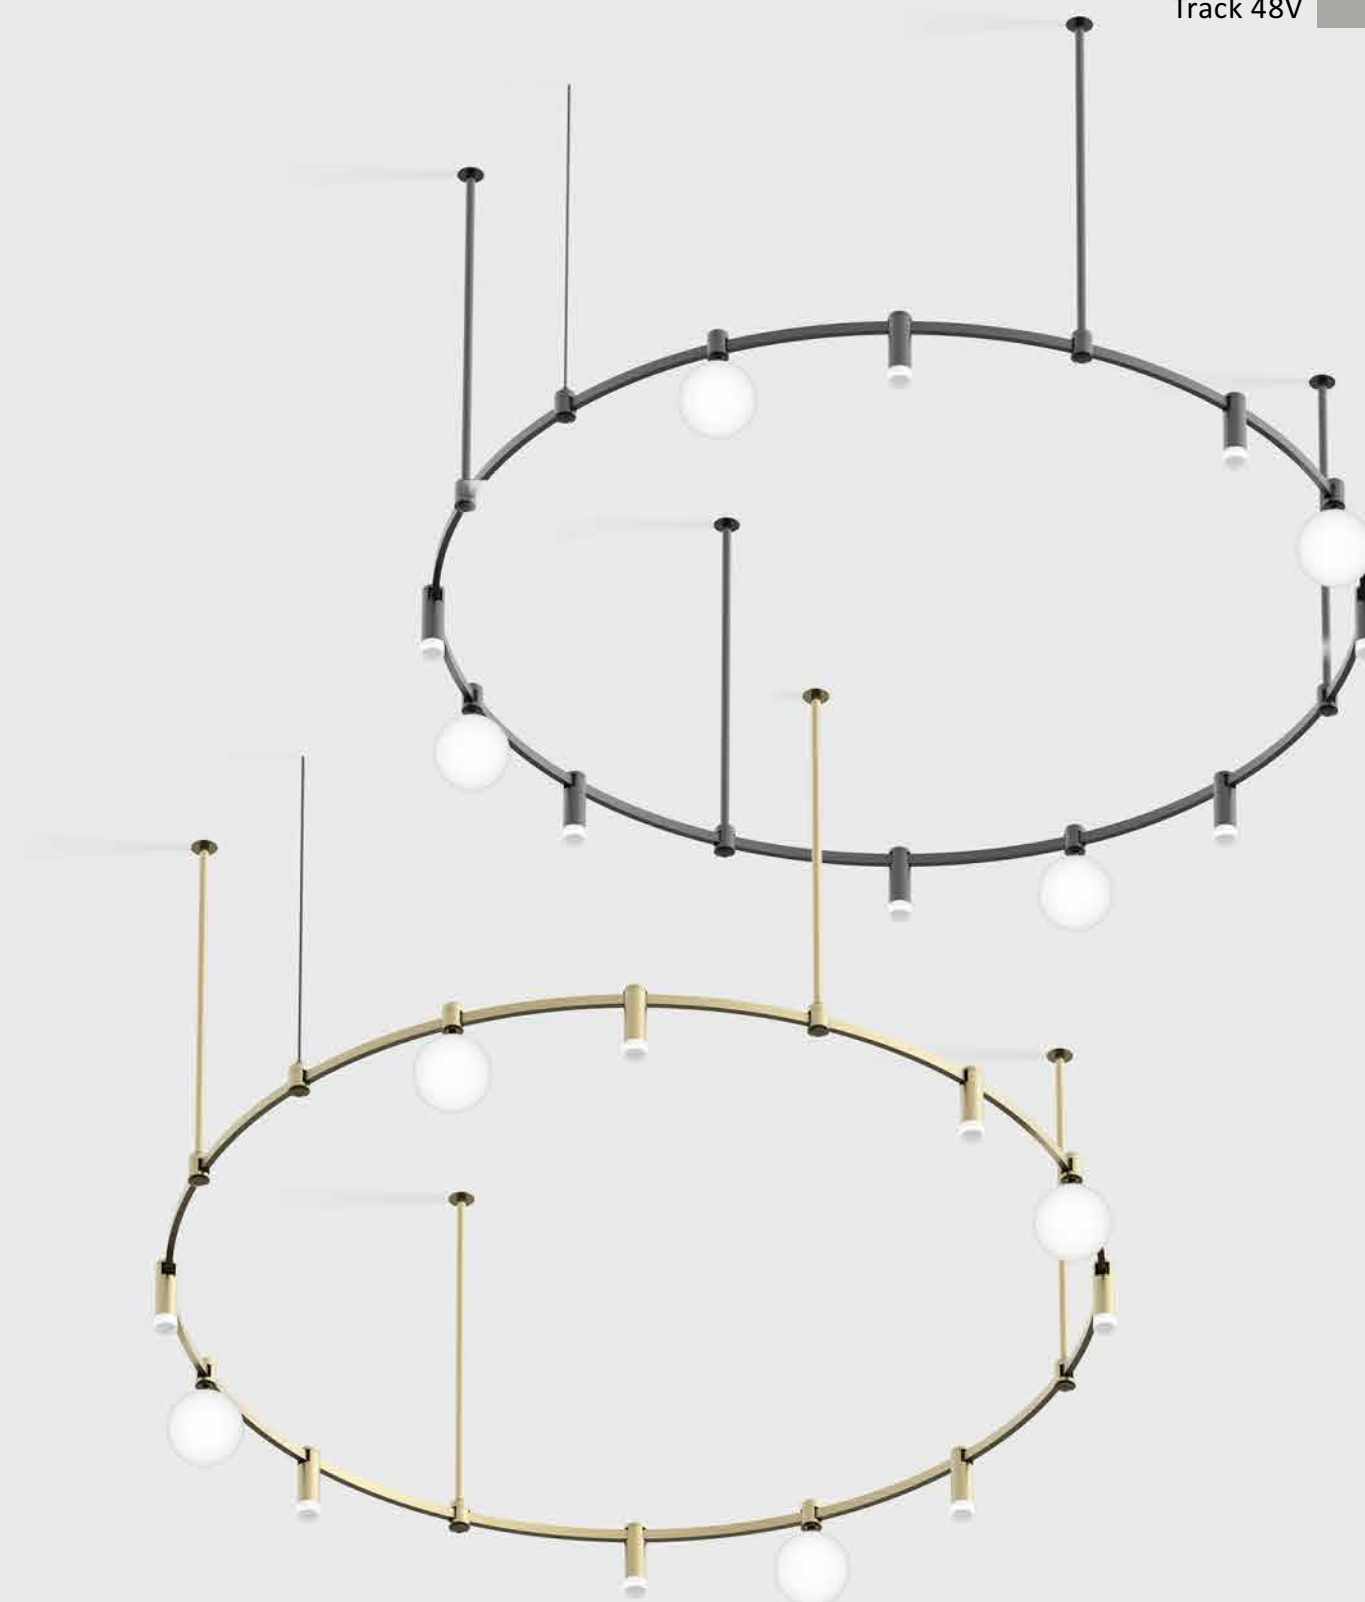

AIR_TRACK S





	Code	Dimensions (mm): LxWxH	Color
Track	15.S100.BK	1000 x 9 x 14,8	Black
	15.S100.BR	1000 x 9 x 14,8	Brass
	15.S250.BK	2500 x 9 x 14,8	Black
	15.S250.BR	2500 x 9 x 14,8	Brass

CE IP20 48V

MATERIAL | AL

» 497

AIR_TRACK END CAP



	Code	Color
End cap for Surface & Suspension track, 2 pcs/set	15.SECAP.BK	Black
	15.SECAP.BR	Brass


CE IP20

MATERIAL | PC

» 497



AIR_TRACK RING



CE IP20 48V


MATERIAL | AL

	Code	Dimensions (mm): DxWxH	Color
Track	15.C088.BK	880 x 9 x 14,8	Black
	15.C088.BR	880 x 9 x 14,8	Brass

Track consists of 2 parts

» 497

AIR_TRACK RING



CE IP20 48V


MATERIAL | AL

	Code	Dimensions (mm): DxWxH	Color
Track	15.C120.BK	1200 x 9 x 14,8	Black
	15.C120.BR	1200 x 9 x 14,8	Brass

Track consists of 2 parts

» 497

AIR_TRACK RING



CE IP20 48V


MATERIAL | AL

	Code	Dimensions (mm): DxWxH	Color
Track	15.C150.BK	1500 x 9 x 14,8	Black
	15.C150.BR	1500 x 9 x 14,8	Brass

Track consists of 2 parts

» 497

AIR_TRACK RING




CE IP20 48V

MATERIAL | AL

	Code	Dimensions (mm): DxWxH	Color
Track	15.C180.BK	1800 x 9 x 14,8	Black
	15.C180.BR	1800 x 9 x 14,8	Brass

Track consists of 3 parts

» 497

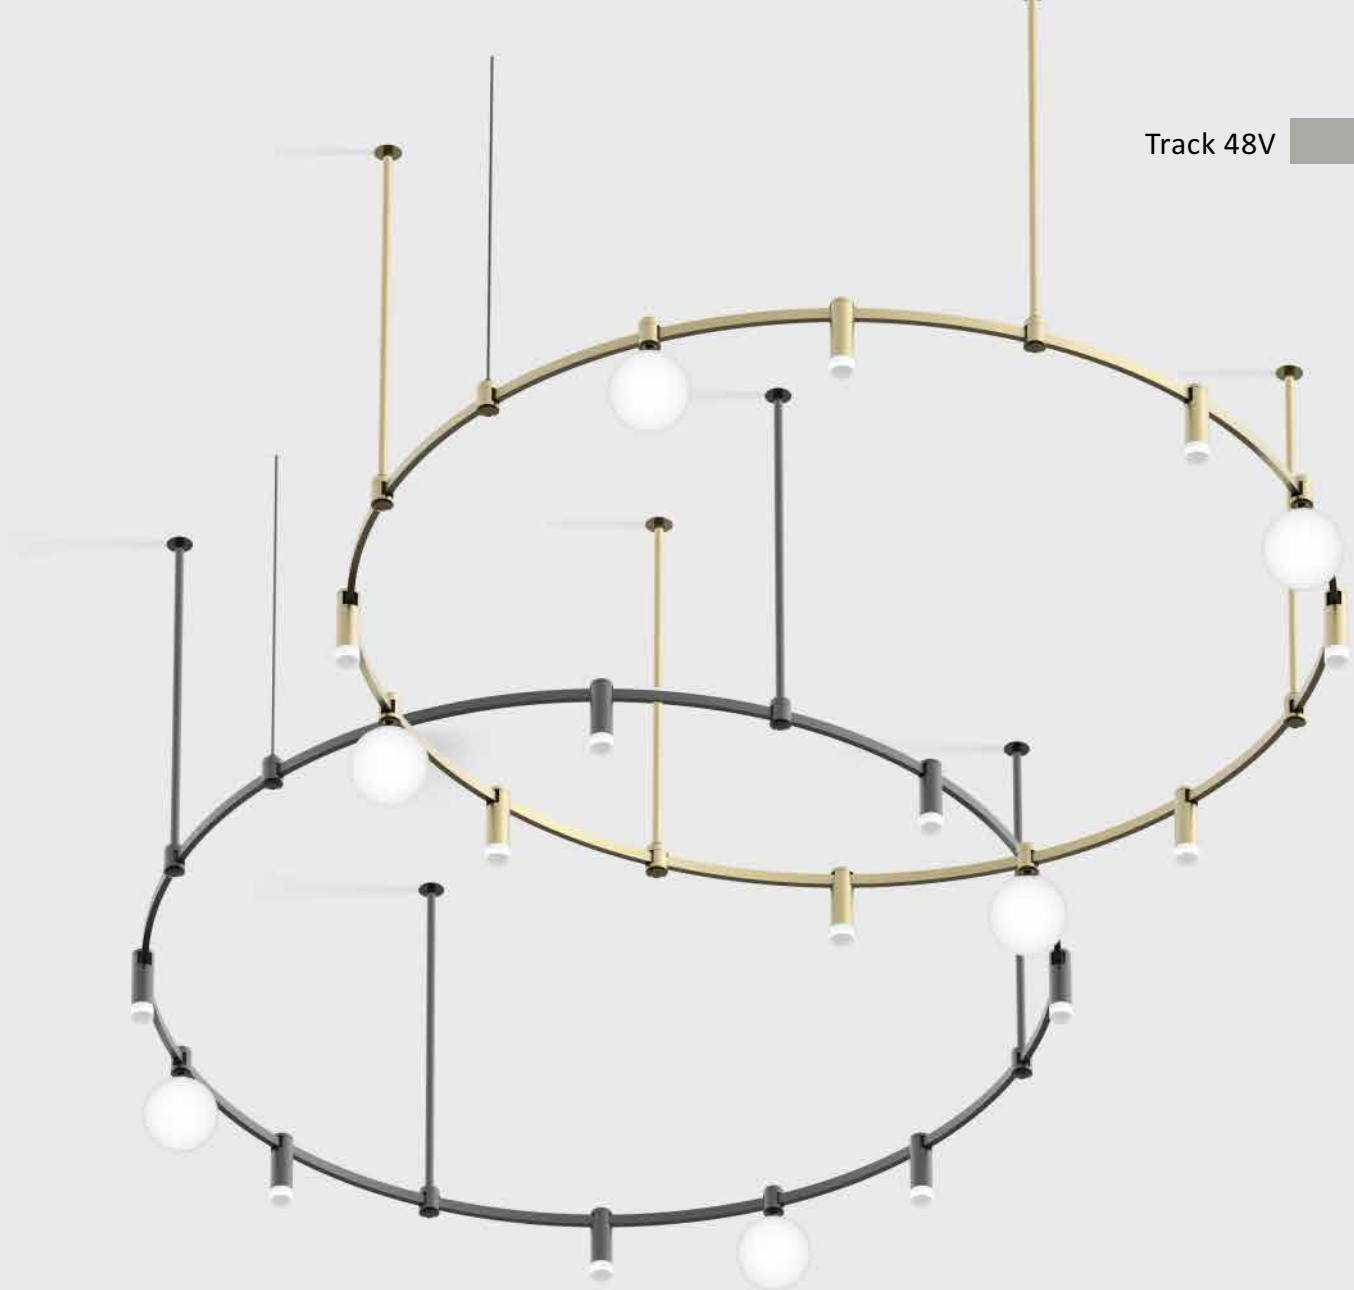

AIR_SS KIT



Ø28

43

CE

IP20

MATERIAL | **AL**

	Code	Color
Single mechanical track mount	15.A2805.BK	Black
	15.A2805.BR	Brass

» 497

AIR_SS IN KIT



Ø28

43

CE

IP20

MATERIAL | **AL**

	Code	Color
Single mechanical 90° connector	15.AHR90.BK	Black
	15.AHR90.BR	Brass

» 497

AIR_SS EL KIT



93

Ø28

CE

IP20

48V

MATERIAL | **AL**

	Code	Color
Electrical double connector, for mounting two tracks at different heights	15.LE2809.BK	Black
	15.LE2809.BR	Brass

» 497

AIR_LIVE END



1000

53

Ø28

CE

IP20

48V

MATERIAL | **AL**

	Code	Color
Single electrical mount (power input)	15.LE100.BK	Black
	15.LE100.BR	Brass

» 497

AIR_SUSP LIVE END



Ø45

2000

81

Ø28

CE

IP20


48V

MATERIAL | **AL**

	Code	Color
Suspension kit with cable and track mount	15.SLE200.BK	Black
	15.SLE200.BR	Brass

» 497

AIR_SURF BRACKET 50




CE IP20

MATERIAL | AL

» 497

	Code	Color
Surface ceiling/wall mount w/o power cable	15.MB05A.BK	Black
	15.MB05A.BR	Brass

AIR_SURF BRACKET 100




CE IP20

MATERIAL | AL

» 497

	Code	Color
Surface ceiling/wall mount w/o power cable	15.MB10A.BK	Black
	15.MB10A.BR	Brass

AIR_SURF BRACKET 200




CE IP20

MATERIAL | AL

» 497

	Code	Color
Surface ceiling/wall mount w/o power cable	15.MB20A.BK	Black
	15.MB20A.BR	Brass

AIR_SURF BRACKET 300




CE IP20

MATERIAL | AL

» 497

	Code	Color
Surface ceiling/wall mount w/o power cable	15.MB30A.BK	Black
	15.MB30A.BR	Brass

AIR_SURF BRACKET 500





CE IP20

MATERIAL | AL

» 497

	Code	Color
Surface ceiling/wall mount w/o power cable	15.MB50A.BK	Black
	15.MB50A.BR	Brass

AIR_BRACKET CON 100




CE IP20 48V

MATERIAL | AL

» 497

	Code	Color
Extender mount w/o power cable	15.MB10B.BK	Black
	15.MB10B.BR	Brass

AIR_BRACKET CON 200




CE IP20 48V

MATERIAL | AL

» 497

	Code	Color
Extender mount w/o power cable	15.MB20B.BK	Black
	15.MB20B.BR	Brass

AIR_SUSP




	Code	Color
Suspension mount without power cable and track mount	15.SS150.BK	Black
	15.SS150.BR	Brass

MATERIAL | AL

» 497

AIR_SUSP





	Code	Color
Suspension mount without power cable and track mount	15.SS200.BK	Black
	15.SS200.BR	Brass

MATERIAL | AL

» 497

AIR_POWER UNIT 100




	Code	Power Watt	Color
Surface mounted ceiling base with power supply	15.A35BD.BK	100	Black
	15.A35BD.BR	100	Brass

CE IP20 48V NODIM
MATERIAL | AL

» 497

POWER SUPPLY




Code	Dimensions (mm): LxWxH	Power Watt	Color
06.PSU.100.W/O	298 x 30 x 16,5	100	Grey
06.PSU.250.W/O	384 x 30 x 22	250	Grey


CE IP20 48V NODIM
MATERIAL | PC

» 497


INSTALLATION SURFACE TRACK SYSTEM AIR_TRACK S

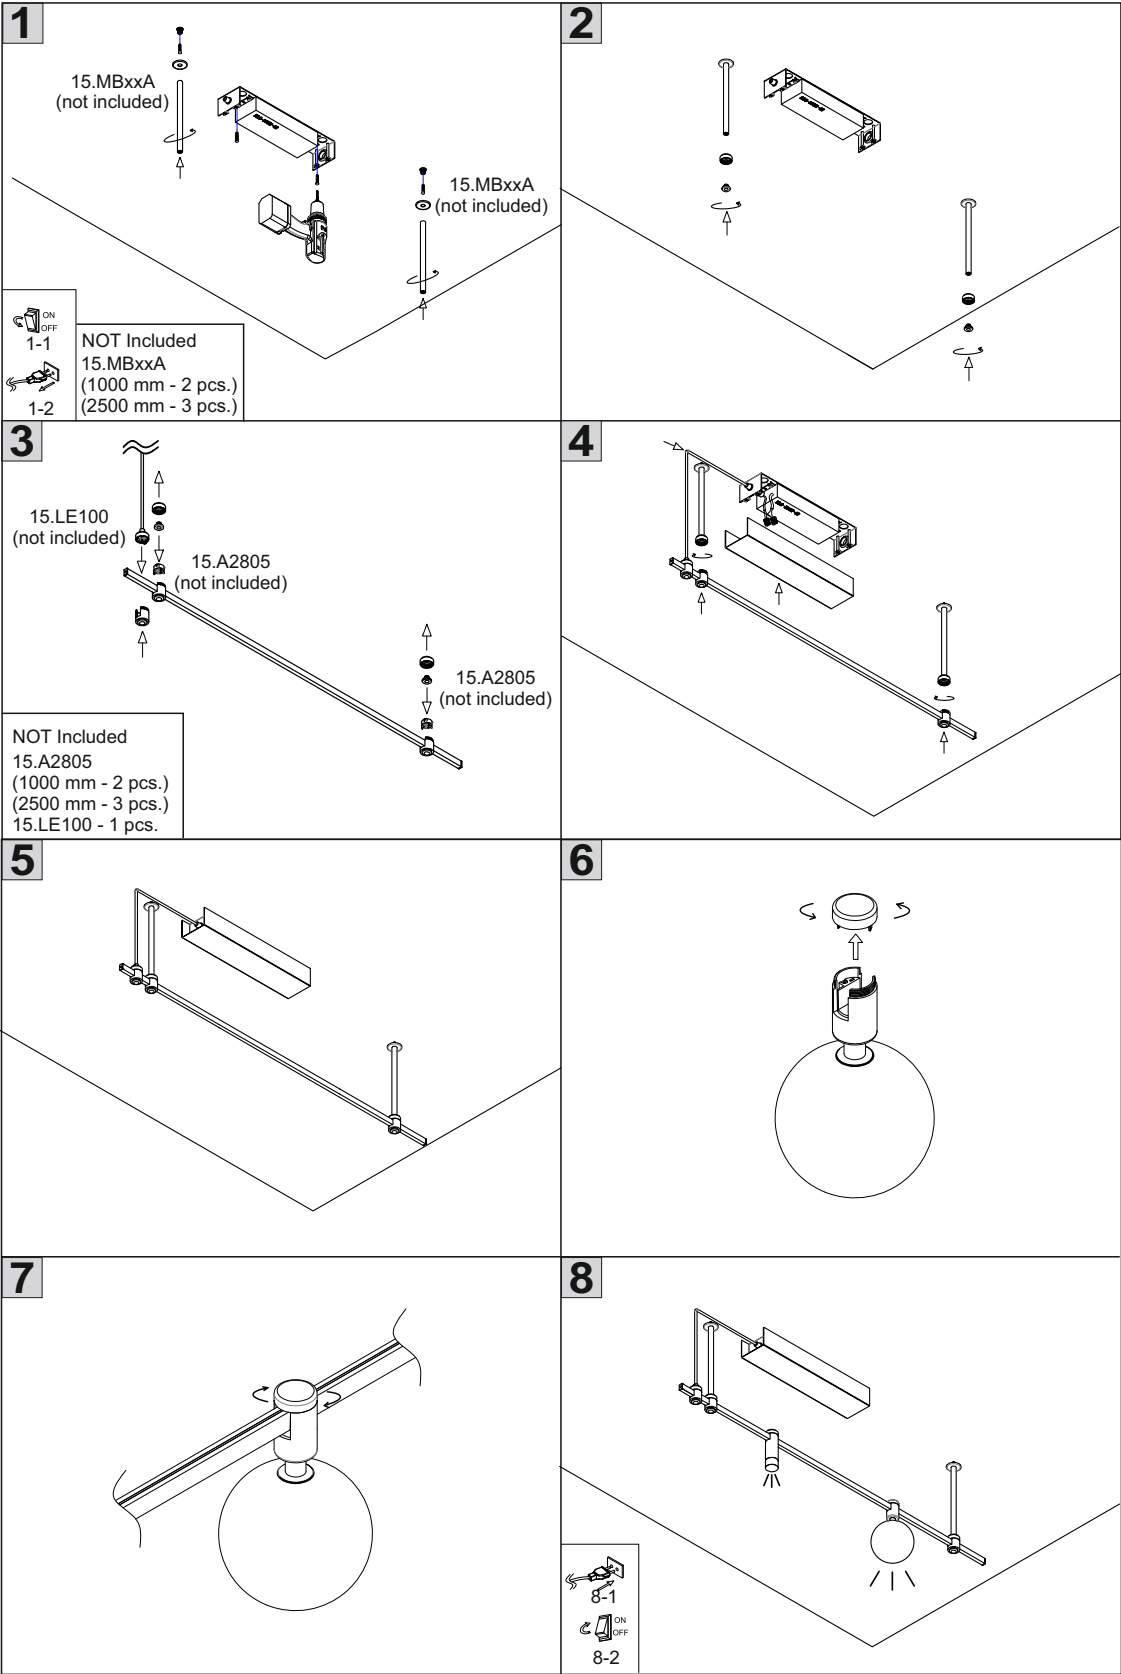

INSTALLATION SURFACE TRACK SYSTEM AIR_TRACK RING

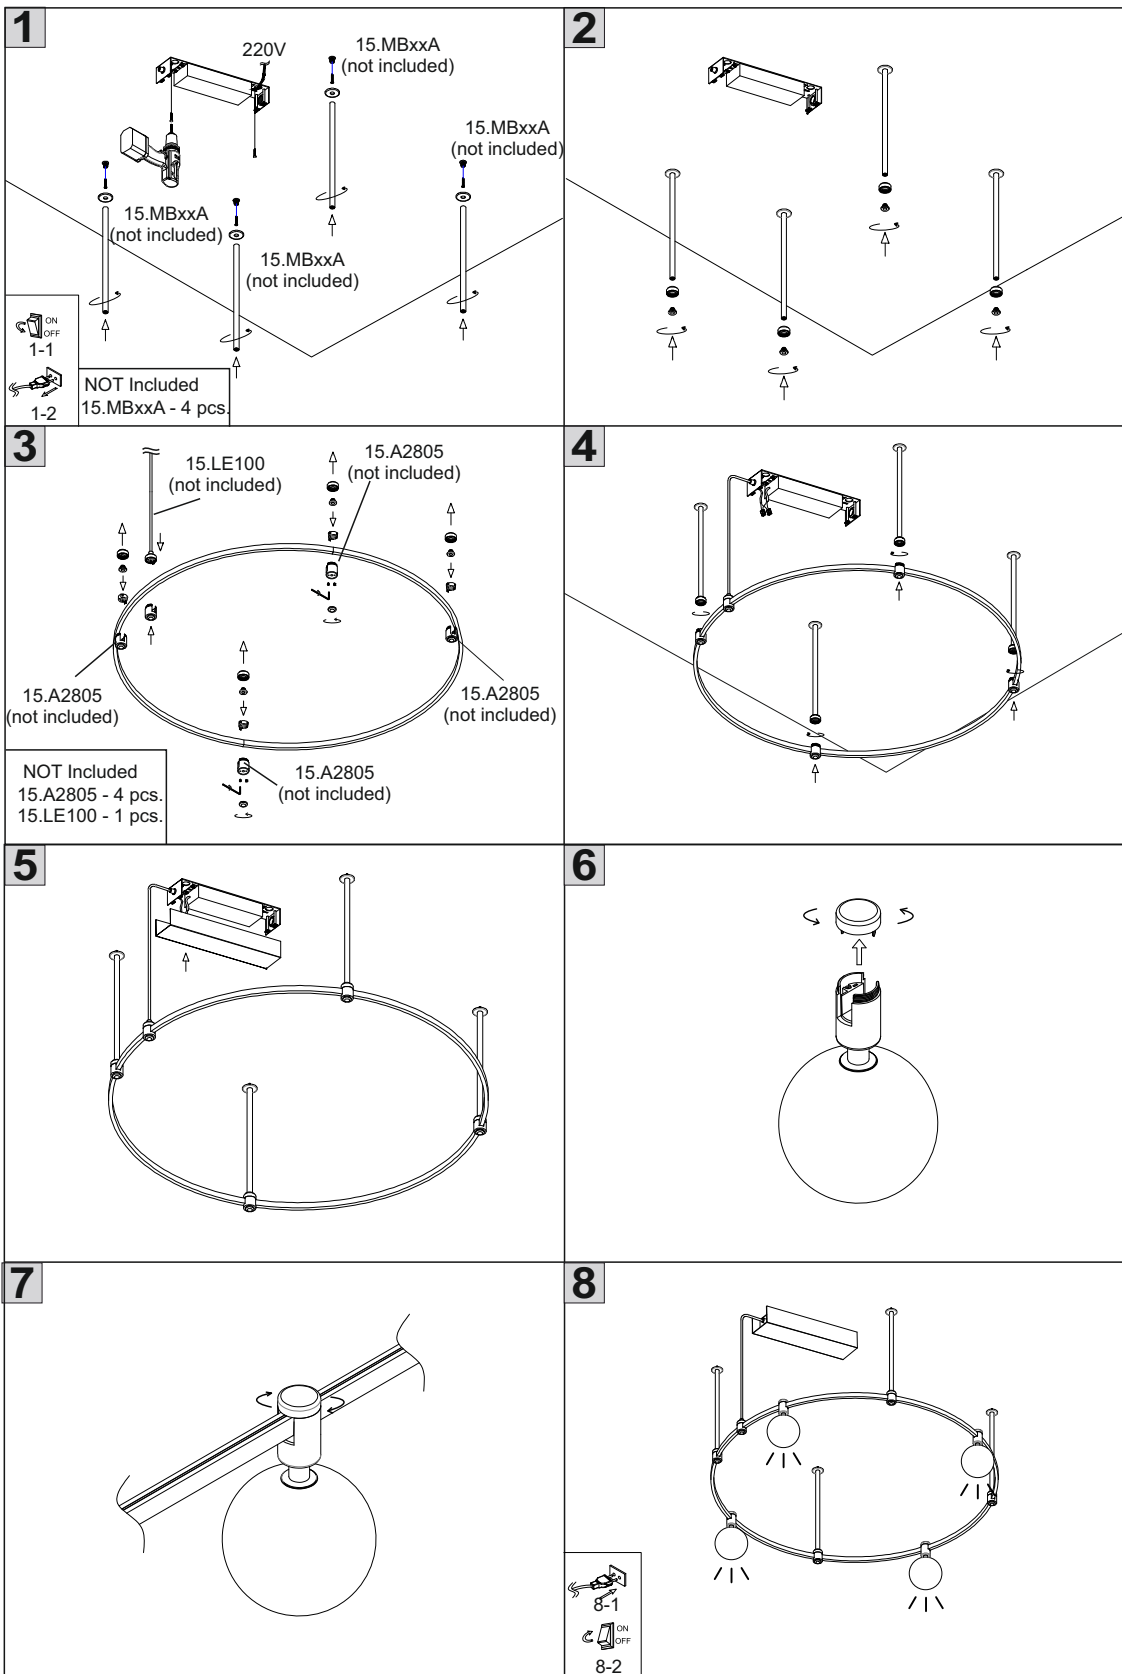

AIR_COMFORT



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.2051.9.930.XX	9	3000	>90	483

LED

CE

IP20

48V

EXCL


36°

DIM 0-10V/DALI PHASE CUT

MATERIAL | AL PC

» 497

AIR_LINEA



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.2050.5.930.XX	5	3000	>90	268

LED

CE

IP20

48V

EXCL


112°

DIM 0-10V/DALI PHASE CUT


MATERIAL | AL PC

» 497

Color	Body
XX	
BK	
BR	



15.2051.9.930.BR



15.2050.5.930.BR



AIR_TUB S



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.0308.4.930.XX	4	3000	>90	403

LED

CE

IP20

48V

EXCL

DIM
0-10V/DALI
PHASE CUT

MATERIAL | AL » 497

ACCESSORIES

20

37

Foggy cover

15.A03FG

Ø30

Color	Body
XX	
BK	
BR	



15.0308.4.930.BK



15.0308.4.930.BR




15.0308.4.930.BK + 15.A03FG



15.0308.4.930.BR + 15.A03FG

AIR_TUB M



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.0510.9.930.XX	9	3000	>90	1104

LED

CE

IP20

48V

EXCL

DIM
0-10V/DALI
PHASE CUT

MATERIAL | AL PC » 497

ACCESSORIES

20

50

Foggy cover

15.A05FG

Ø52

Color	Body
XX	
BK	
BR	



15.0510.9.930.BK



15.0510.9.930.BR



15.0510.9.930.BK + 15.A05FG




15.0510.9.930.BR + 15.A05FG

AIR_TUB S A



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.0361.4.930.XX	4	3000	>90	403



LED

CE

IP20

48V

EXCL

36°

Tilt

Rotate

DIM
0-10V/DALI
PHASE CUT

MATERIAL |

AL

i

» 497

Color		Body	
XX		BK	
BR		BR	



15.0591.9.930.BK




15.0361.4.930.BR

AIR_TUB M A



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.0591.9.930.XX	9	3000	>90	1104



LED

CE

IP20

48V

EXCL

30°

Tilt

Rotate

DIM
0-10V/DALI
PHASE CUT

MATERIAL |

AL

i

» 497

Color		Body	
XX		BK	
BR		BR	



15.0591.9.930.BK



15.0591.9.930.BR

AIR_TUB MAT




Code	Power Watt	Color T (K)	CRI	Product Lumen
15.0301.4.930.XX	4	3000	>90	242

LED CE IP20 48V EXCL 93* DIM 0-10V/DALI PHASE CUT

MATERIAL | AL PC

» 497

AIR_TUB 2MAT



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.0302.8.930.XX	2 x 4	3000	>90	2 x 242

LED CE IP20 48V EXCL 93* DIM 0-10V/DALI PHASE CUT

MATERIAL | AL PC

» 497

Color	Body
XX	
BK	BK
BR	BR




15.0301.4.930.BR



15.0302.8.930.BR



AIR_SOL MINI



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.7526.4.930.XX	4	3000	>90	422

LED

CE

IP20

48V

DIM
0-10V/DALI
PHASE CUT

MATERIAL | AL

» 497

Color	Body
XX	
BK	
BR	




15.7526.4.930.BK



15.7526.4.930.BR



AIR_SFERA



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.1001.4.930.XX	4	3000	>90	142

LED

CE

IP20

48V

EXCL

360°

DIM
0-10V/DALI
PHASE CUT

MATERIAL | AL GL

» 497

Color	Body
XX	
BK	
BR	



15.1001.4.930.BK




15.1001.4.930.BR



AIR_SFERA P

NEW



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.1000.4.930.XX	4	3000	>90	142

LED CE IP20 48V EXCL 360° DIM 0-10V/DALI PHASE CUT

MATERIAL | AL GL

i » 497

Color	Body
XX	
BK	BK ■
BR	BR ■




15.1000.4.930.BK



15.1000.4.930.BR



AIR_TUB S P



Code	Power Watt	Color T (K)	CRI	Product Lumen
15.0330.4.930.XX	6	3000	>90	540

LED CE IP20 48V EXCL 36° DIM 0-10V/DALI PHASE CUT

MATERIAL | AL

» 497

Color	Body
XX	
BK	BK
BR	BR



15.0330.4.930.BK




15.0330.4.930.BR



PICO_LINE



PICO_LINE TRACK R




	Code	Dimensions (mm): LxWxH	Color
Recessed track	16.R100.BK	1000 x 50 x 15	Black
	16.R200.BK	2000 x 50 x 15	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE MEC JOINT R





	Code	Color
Mechanical linear connector for track	16.RLNCON	Black

CE IP20

MATERIAL | INOX

» 497

PICO_LINE END CAP R/S



	Code	Color
End cap for Recessed & Surface track, 2 pcs/set	16.R/SECAP.BK	Black


CE IP20 48V

MATERIAL | PC

» 497



PICO_LINE CORNER R HR





	Code	Color
Recessed «L» track connector	16.R90HR.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE CORNER R IN




	Code	Color
Recessed «L» connector Ceiling to Wall, in-installation	16.R90IN.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC R




	Code	Color
Recessed radial corner, 90° R300mm	16.RC30.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC R

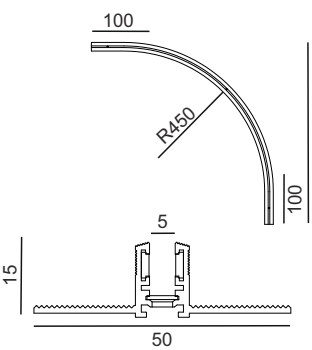


	Code	Color
Recessed radial corner, 90° R450mm	16.RC45.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC R

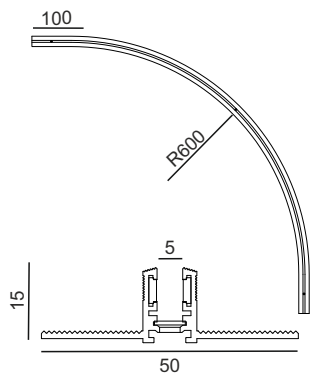


	Code	Color
Recessed radial corner, 90° R600mm	16.RC60.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE TRACK S



CE IP20 24V

MATERIAL | AL

» 497

	Code	Dimensions (mm): LxWxH	Color
Surface / Suspension track	16.S100.BK	1000 x 10 x 15	Black
	16.S200.BK	2000 x 10 x 15	Black

PICO_LINE MEC JOINT S/O





CE IP20

MATERIAL | INOX

» 497

	Code	Color
Mechanical linear connector for track a connection part for 16.Sx00/16.Ox00	16.SLNCON	Black

PICO_LINE END CAP R/S




CE IP20

MATERIAL | PC

» 497

	Code	Color
End cap for Recessed & Surface track, 2 pcs/set	16.R/SECAP.BK	Black

PICO_LINE SUSP KIT




CE IP20

MATERIAL | AL

» 497

	Code	Color
Suspension	16.SS200.ZZ	Steel

PICO_LINE CORNER S HR





	Code	Color
Surface/suspension «L» track connector	16.S90HR.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE CORNER S IN




	Code	Color
Surface «L» track connector Ceiling to Wall in – installation	16.S90IN.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC S




	Code	Color
Surface radial corner track, 90°, R150	16.SC15.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC S




	Code	Color
Surface radial corner track, 90°, R300	16.SC30.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC S




	Code	Color
Surface radial corner track, 90°, R450	16.SC45.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC S




	Code	Color
Surface radial corner track, 90°, R600	16.SC60.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE TRACK O



	Code	Dimensions (mm): LxWxH	Color
Surface / Suspension round track	16.O100.BK	1000 x 20 x 18	Black
	16.O200.BK	2000 x 20 x 18	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE MEC JOINT S/O




	Code	Color
Mechanical linear connector for track a connection part for 16.Sx00/16.Ox00	16.SLNCON	Black

CE IP20

MATERIAL | INOX

» 497

PICO_LINE END CAP O




	Code	Color
End cap for round track 2 pcs/set	16.OSECAP.BK	Black

CE IP20

MATERIAL | PC

» 497

PICO_LINE ARC O




	Code	Color
Surface radial corner, 90° R300mm	16.OC30.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC O




	Code	Color
Surface radial corner, 90° R450mm	16.OC45.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ARC O

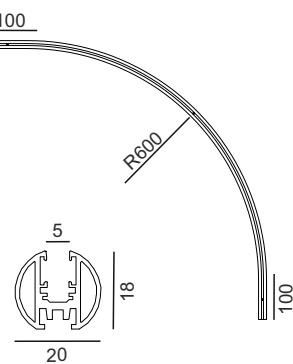


	Code	Color
Surface radial corner, 90° R600mm	16.OC60.BK	Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE SUSP KIT




	Code	Color
Suspension	16.SS200.ZZ	Steel

CE IP20

MATERIAL | AL

» 497

PICO_LINE O BRACKET L




	Code	Color
Surface mounted ceiling/wall mount	16.OMB12.BK	Black

CE IP20

MATERIAL | AL

» 497

PICO_LINE O BRACKET S




	Code	Color
Surface mounted ceiling/wall mount	16.OMB00.BK	Black


CE IP20

MATERIAL | AL

» 497

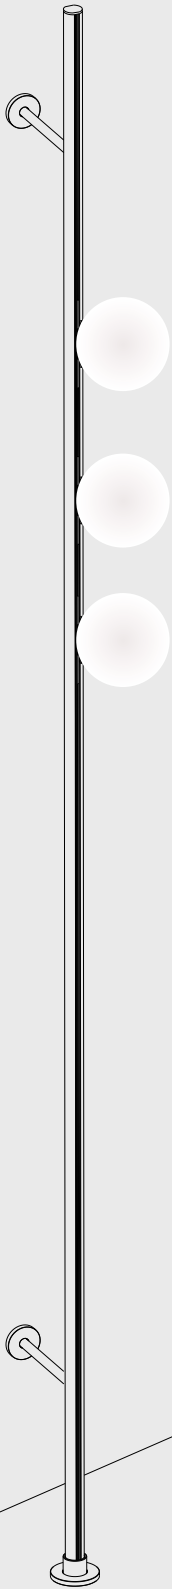

PICO_LINE ELECTRICAL JOINT



Electrical joint live end
for track, without cable

16.SLE00.BK


Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE ELECTRICAL JOINT FLEX



Electrical joint flex
connector for tack

16.S2LE100.BK


Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE LIVE END



Electrical joint live end
for track, with cable

16.SLE100.BK


Black

CE IP20 24V EXCL

MATERIAL | AL

» 497

PICO_LINE LIVE END PSU



Electrical joint live end
for track adapter used
with the plug driver

16.SLEPSU.BK


Black

CE IP20 24V

MATERIAL | AL

» 497

PICO_LINE POWER UNIT



Plug driver
Europe standard

16.PSU.40.BK

Power
Watt
40


Black

CE IP20 24V EXCL

MATERIAL | AL

» 497

PICO_LINE POWER UNIT 100



Power supply

16.PSU.100.BK

Power
Watt
100


Black

CE IP20 SELV 24V NO DIM


MATERIAL | AL

» 497


INSTALLATION RECESSED TRACK SYSTEM PICO_LINE TRACK R

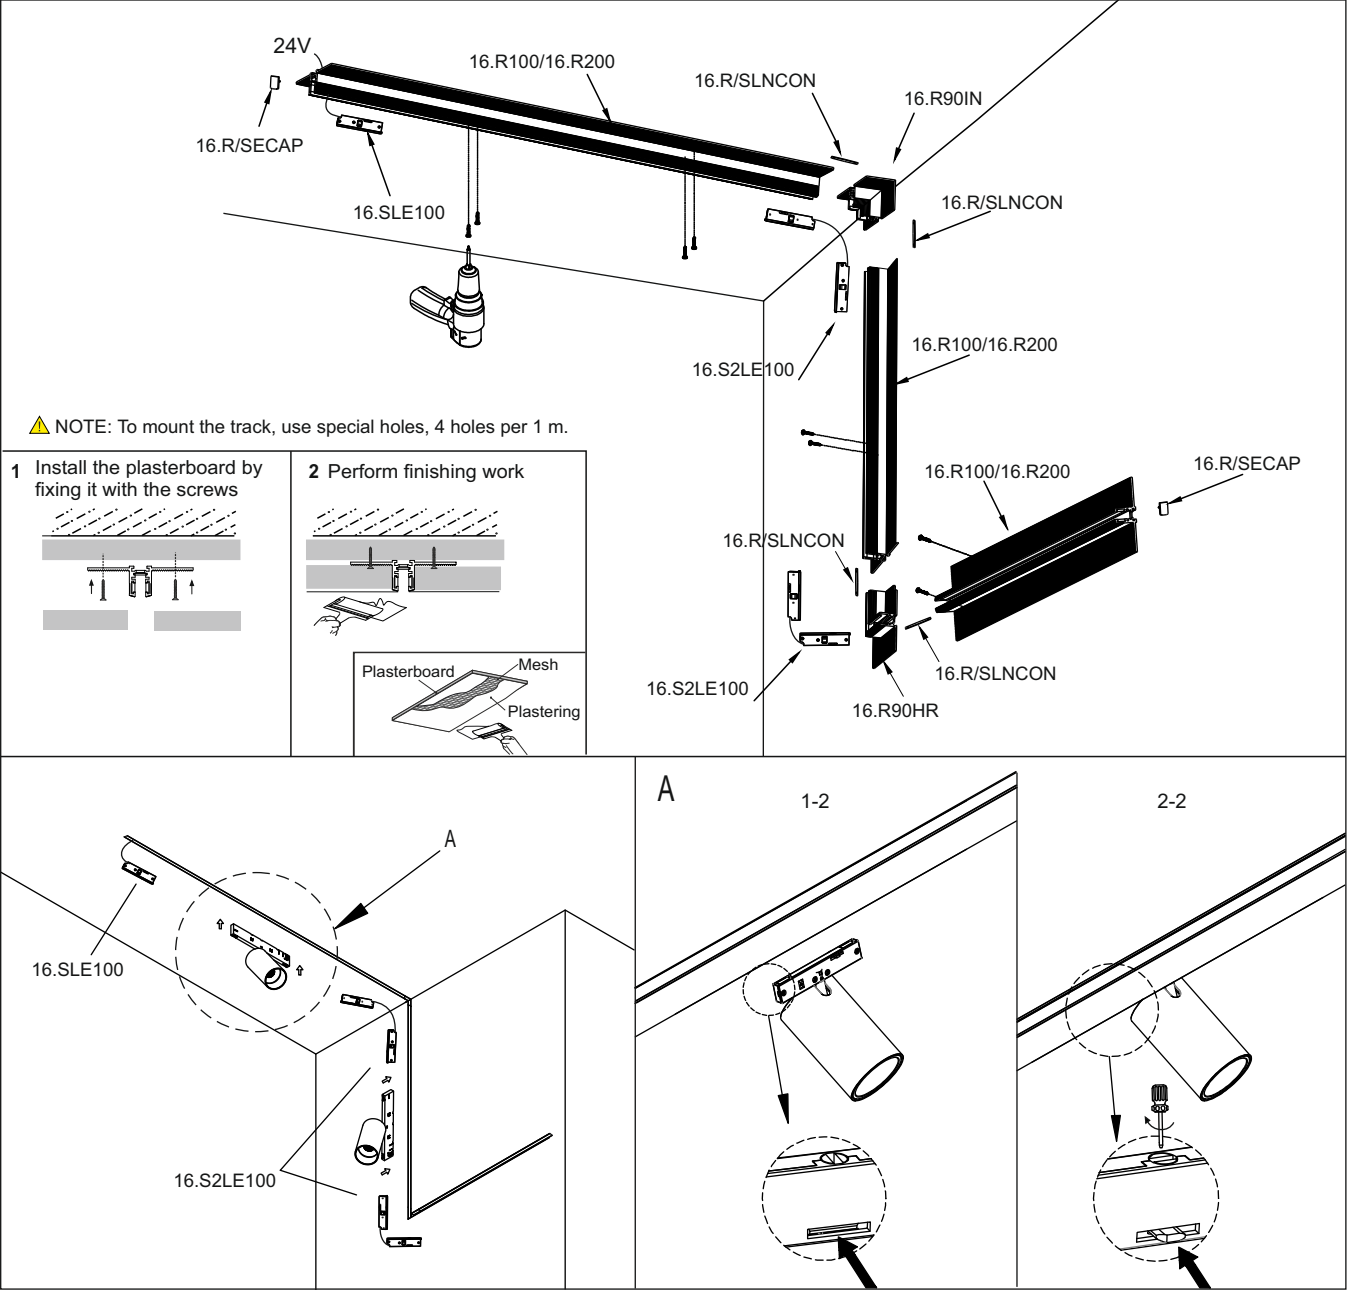


INSTALLATION SURFACE TRACK SYSTEM PICO_LINE TRACK S

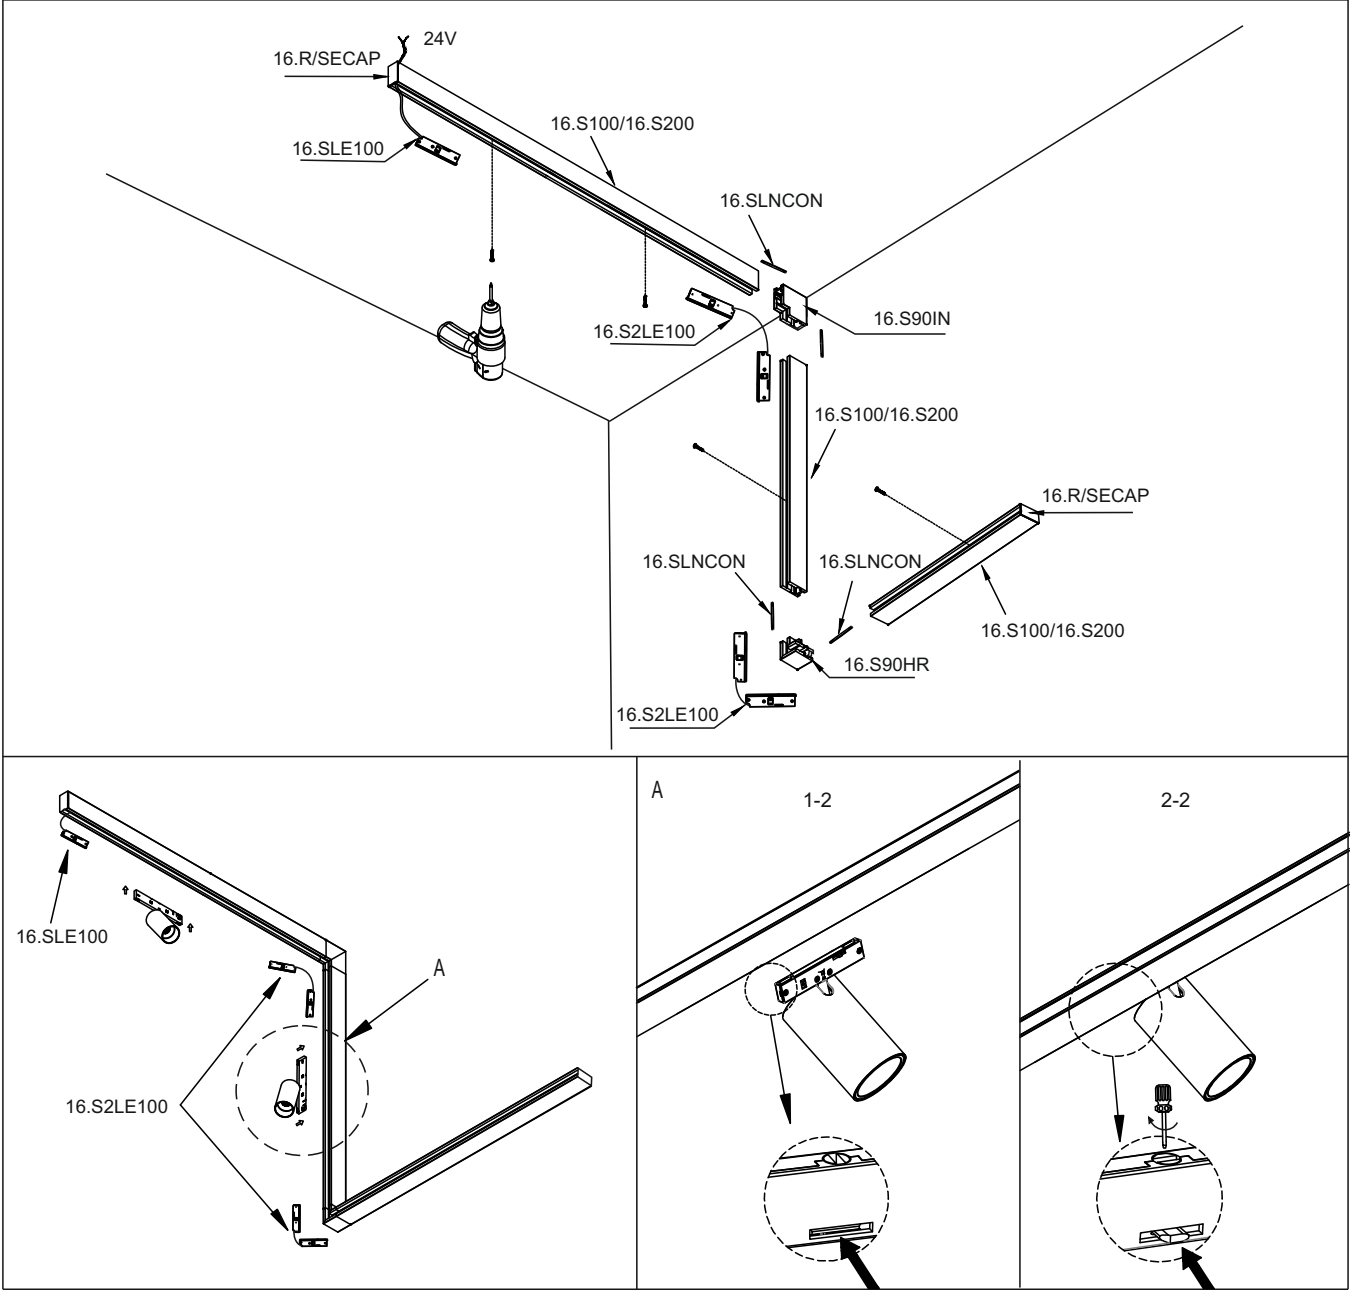


INSTALLATION WALL SURFACE
TRACK SYSTEM PICO_LINE TRACK O

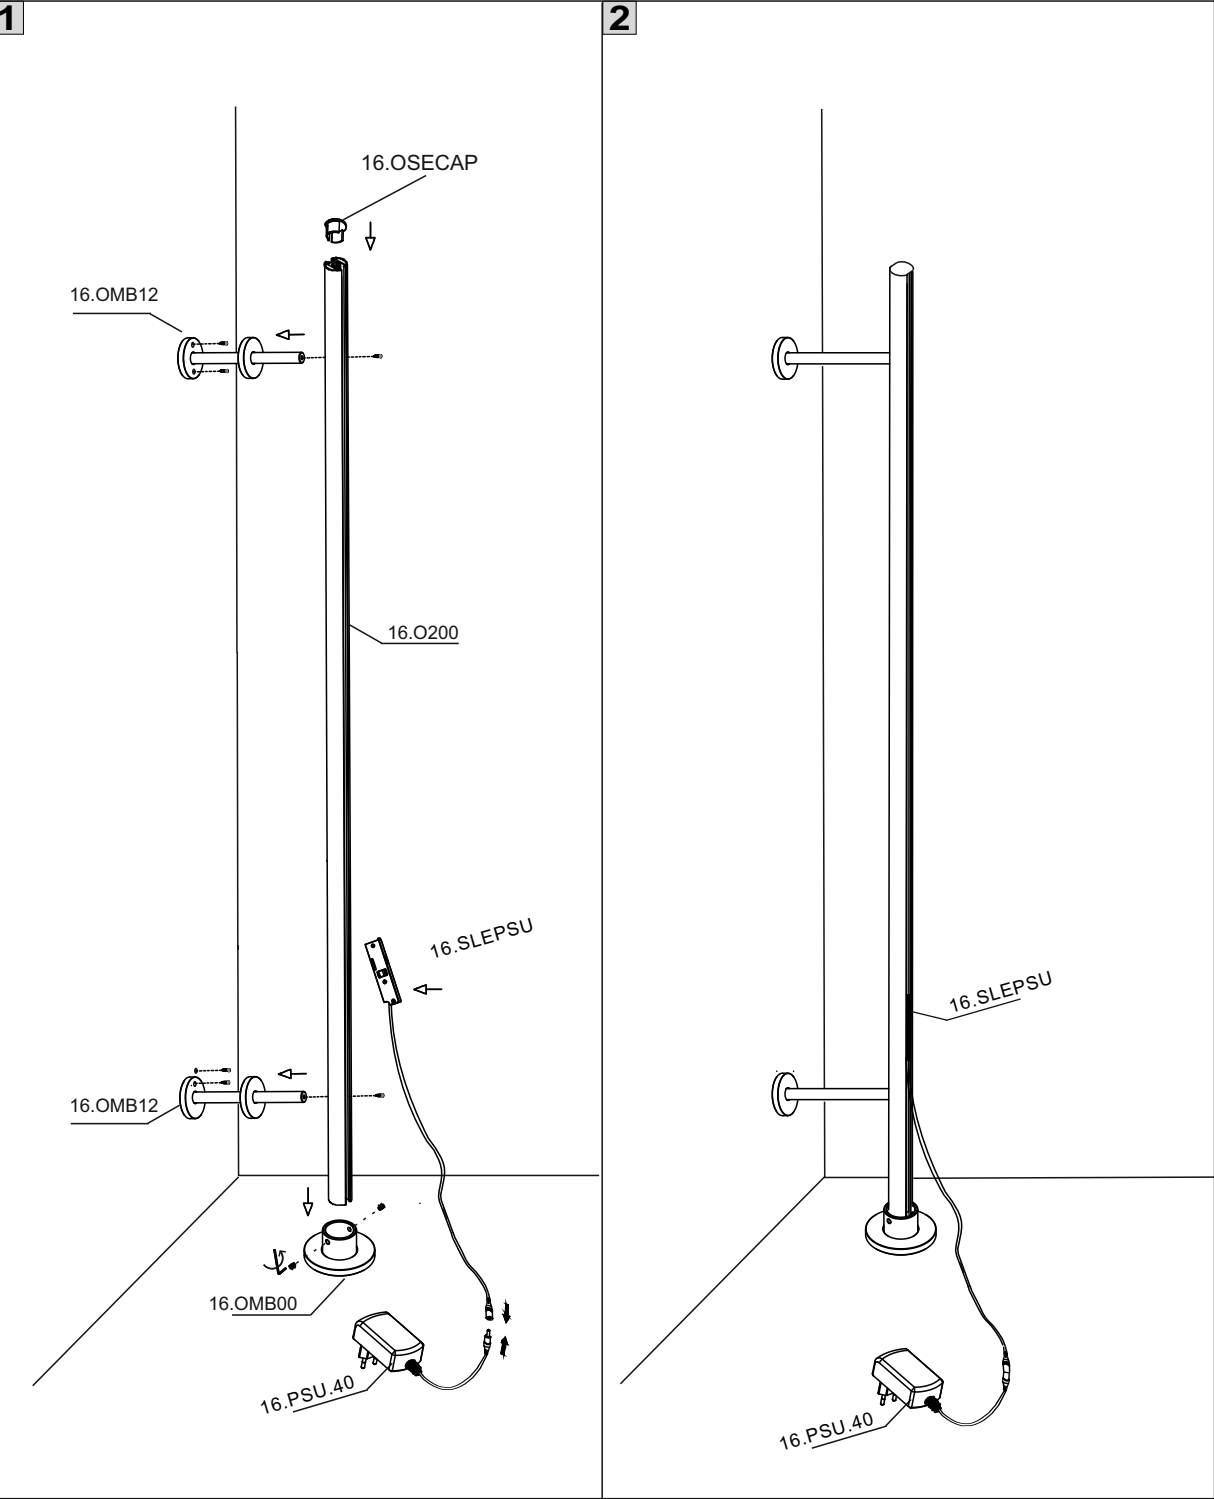

INSTALLATION SUSPENDED
TRACK SYSTEM PICO_LINE TRACK O

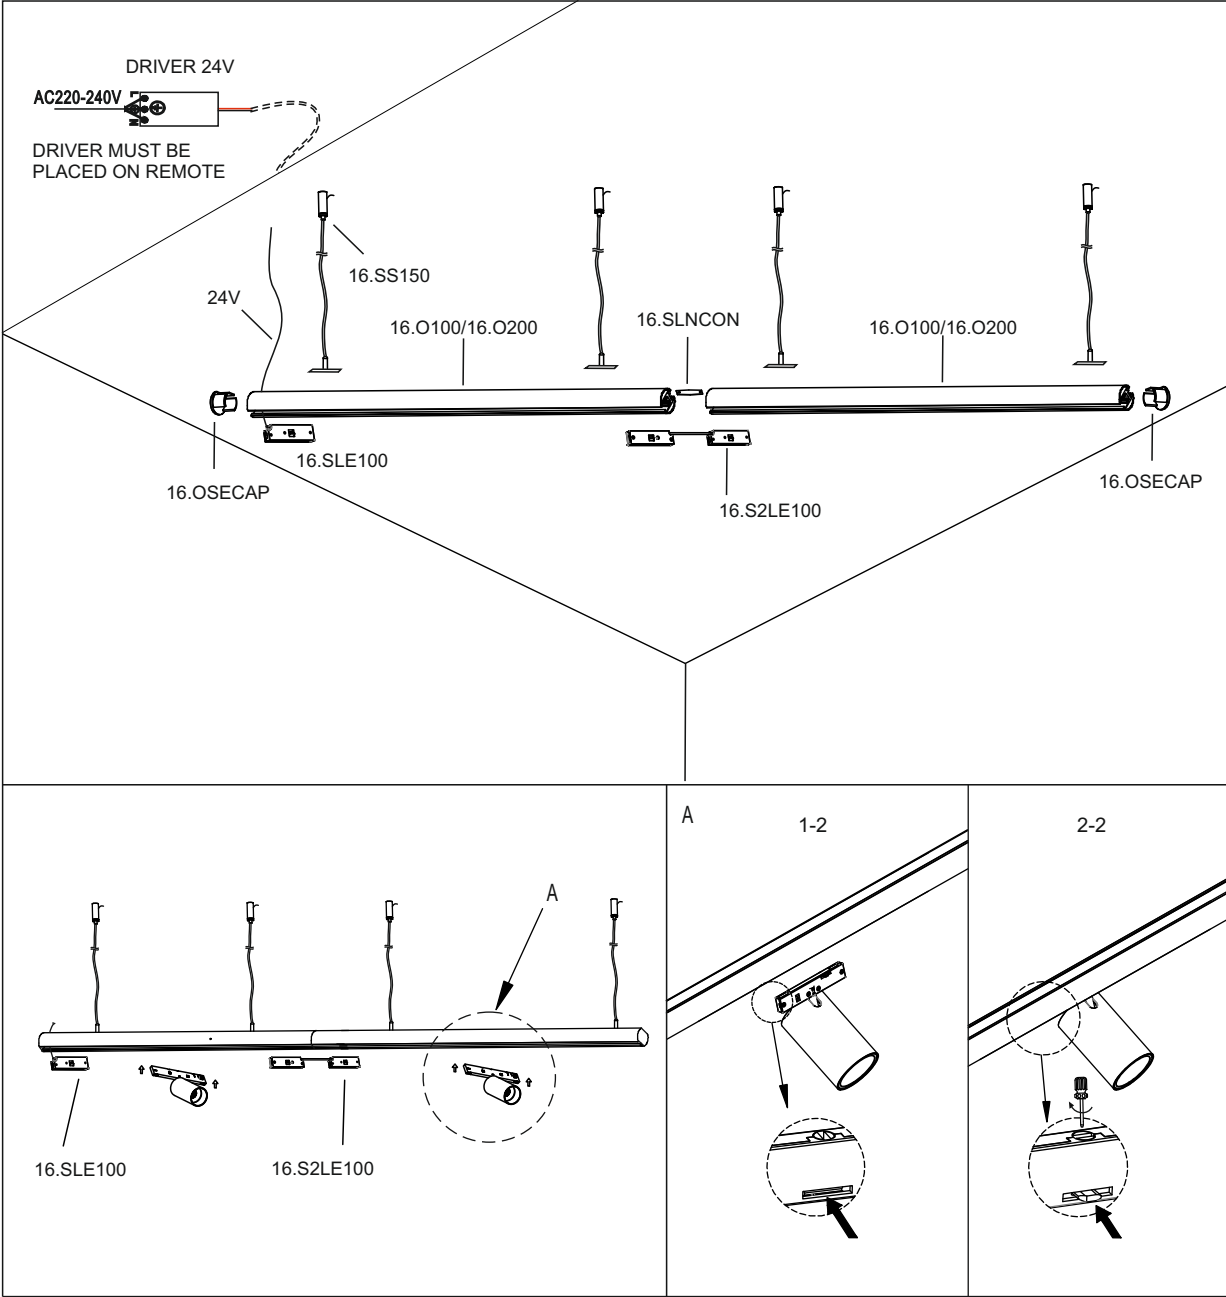

PICO_LINE FLEX LINEA 100




Code	Power Watt	Color T (K)	CRI	Product Lumen
16.1000.8.930.XX.***	8	3000	>90	1416
16.1000.8.940.XX.***	8	4000	>90	1416




MATERIAL | AL PC

» 497

PICO_LINE FLEX LINEA 200



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.2000.16.930.XX.***	16	3000	>90	2832
16.2000.16.940.XX.***	16	4000	>90	2832



MATERIAL | AL PC

» 497



XX	Body	Adapter
BK	WH □ BK ■	

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT



OTHER COLORS TEMPERATURE ON REQUEST

PICO_LINE LINEA 300




Code	Power Watt	Color T (K)	CRI	Product Lumen
16.3000.5.930.XX.***	5	3000	>90	450
16.3000.5.940.XX.***	5	4000	>90	450



MATERIAL | AL PC

» 497

PICO_LINE LINEA 600




Code	Power Watt	Color T (K)	CRI	Product Lumen
16.6000.10.930.XX.***	10	3000	>90	900
16.6000.10.940.XX.***	10	4000	>90	900



MATERIAL | AL PC

» 497

PICO_LINE LINEA 900



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.9000.15.930.XX.***	15	3000	>90	1300
16.9000.15.940.XX.***	15	4000	>90	1300



MATERIAL | AL PC


» 497

XX	Body	Adapter
BK	BK ■ BK ■	

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT

OTHER COLORS TEMPERATURE ON REQUEST

PICO_LINE LINEA OUT 300





Code	Power Watt	Color T (K)	CRI	Product Lumen
16.3010.8.930.XX.***	8	3000	>90	700
16.3010.8.940.XX.***	8	4000	>90	700



MATERIAL | AL PC

» 497

PICO_LINE LINEA OUT 450



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.4510.12.930.XX.***	12	3000	>90	1100
16.4510.12.940.XX.***	12	4000	>90	1100




MATERIAL | AL PC

» 497

XX	Body	Adapter
BK	BK	BK

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT

PICO_LINE LINEA OUT 600




Code	Power Watt	Color T (K)	CRI	Product Lumen
16.6010.16.930.XX.***	16	3000	>90	1300
16.6010.16.940.XX.***	16	4000	>90	1300



MATERIAL | AL PC

» 497

PICO_LINE LINEA OUT 900



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.9010.21.930.XX.***	21	3000	>90	2300
16.9010.21.940.XX.***	21	4000	>90	2300




MATERIAL | AL PC

» 497

XX	Body	Adapter
BK	BK	BK

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT

PICO_LINE COMFORT OUT 100




Code	Power Watt	Color T (K)	CRI	Product Lumen
16.1011.6.930.XX.***	5	3000	>90	500
16.1011.6.940.XX.***	5	4000	>90	500

LEDCEIIIFFIP2024VEXCL30°

MATERIAL | ALPC

i » 497

PICO_LINE COMFORT OUT 292





Code	Power Watt	Color T (K)	CRI	Product Lumen
16.3011.15.930.XX.***	15	3000	>90	1600
16.3011.15.940.XX.***	15	4000	>90	1600

LEDCEIIIFFIP2024VEXCL30°

MATERIAL | ALPC

i » 497

PICO_LINE COMFORT OUT 196




Code	Power Watt	Color T (K)	CRI	Product Lumen
16.2011.10.930.XX.***	10	3000	>90	1100
16.2011.10.940.XX.***	10	4000	>90	1100

LEDCEIIIFFIP2024VEXCL30°

MATERIAL | ALPC

i » 497

PICO_LINE COMFORT OUT 387



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.4011.20.930.XX.***	20	3000	>90	2300
16.4011.20.940.XX.***	20	4000	>90	2300

LEDCEIIIFFIP2024VEXCL30°

MATERIAL | ALPC

i » 497

XX	Body	Adapter
BK	BK	BK


***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT



XX	Body	Adapter
BK	BK	BK

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT

PICO_LINE TOP



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.0643.5.930.XX.***	5	3000	>90	450
16.0643.5.940.XX.***	5	4000	>90	450

LED

CE

IP20

24V

MATERIAL | AL PC


» 497

XX	Body	Adapter
BK	BK	BK
BR	BR	BK
WH	WH	BK

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT



PICO_LINE TUB M



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.0460.9.930.XX.***	9	3000	>90	700
16.0460.9.940.XX.***	9	4000	>90	700

LED

CE

IP20

24V

MATERIAL | AL PC



» 497

XX	Body	Adapter
BK	BK	BK
BR	BR	BK
WH	WH	BK

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT



PICO_LINE SFERA



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.1001.3.930.XX.***	3	3000	>90	150
16.1001.3.940.XX.***	3	4000	>90	150

LED CE IP20 24V


MATERIAL | AL GL

» 497

XX	Body	Adapter
BK	WH ☐ BK ☒	
***	Options**	
	ON/OFF	
DIM	DIM 1-10V/DALI/PHASE CUT	



PICO_LINE DISK



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.0140.18.930.XX.***	18	3000	>90	1100
16.0140.18.940.XX.***	18	4000	>90	1100



MATERIAL | AL PC

» 497

XX	Body	Adapter
BK	BK	BK
BR	BR	BK
WH	WH	BK

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT



16.0140.18.930.WH.DIM





16.0140.18.930.BK.DIM



16.0140.18.930.BR.DIM



PICO_LINE TUB XS P 300



Code	Power Watt	Color T (K)	CRI	Product Lumen
16.0230.3.930.XX	3	3000	>90	180
16.0230.3.940.XX	3	4000	>90	180




MATERIAL | AL PC

i » 497

XX	Body	Adapter
BK	BK ■ BK ■	
BR	BR ■ BK ■	
WH	WH □ BK ■	

***	Options**
	ON/OFF
DIM	DIM 1-10V/DALI/PHASE CUT



16.0230.3.930.BR




16.0230.3.930.WH




LTX

OUTDOOR

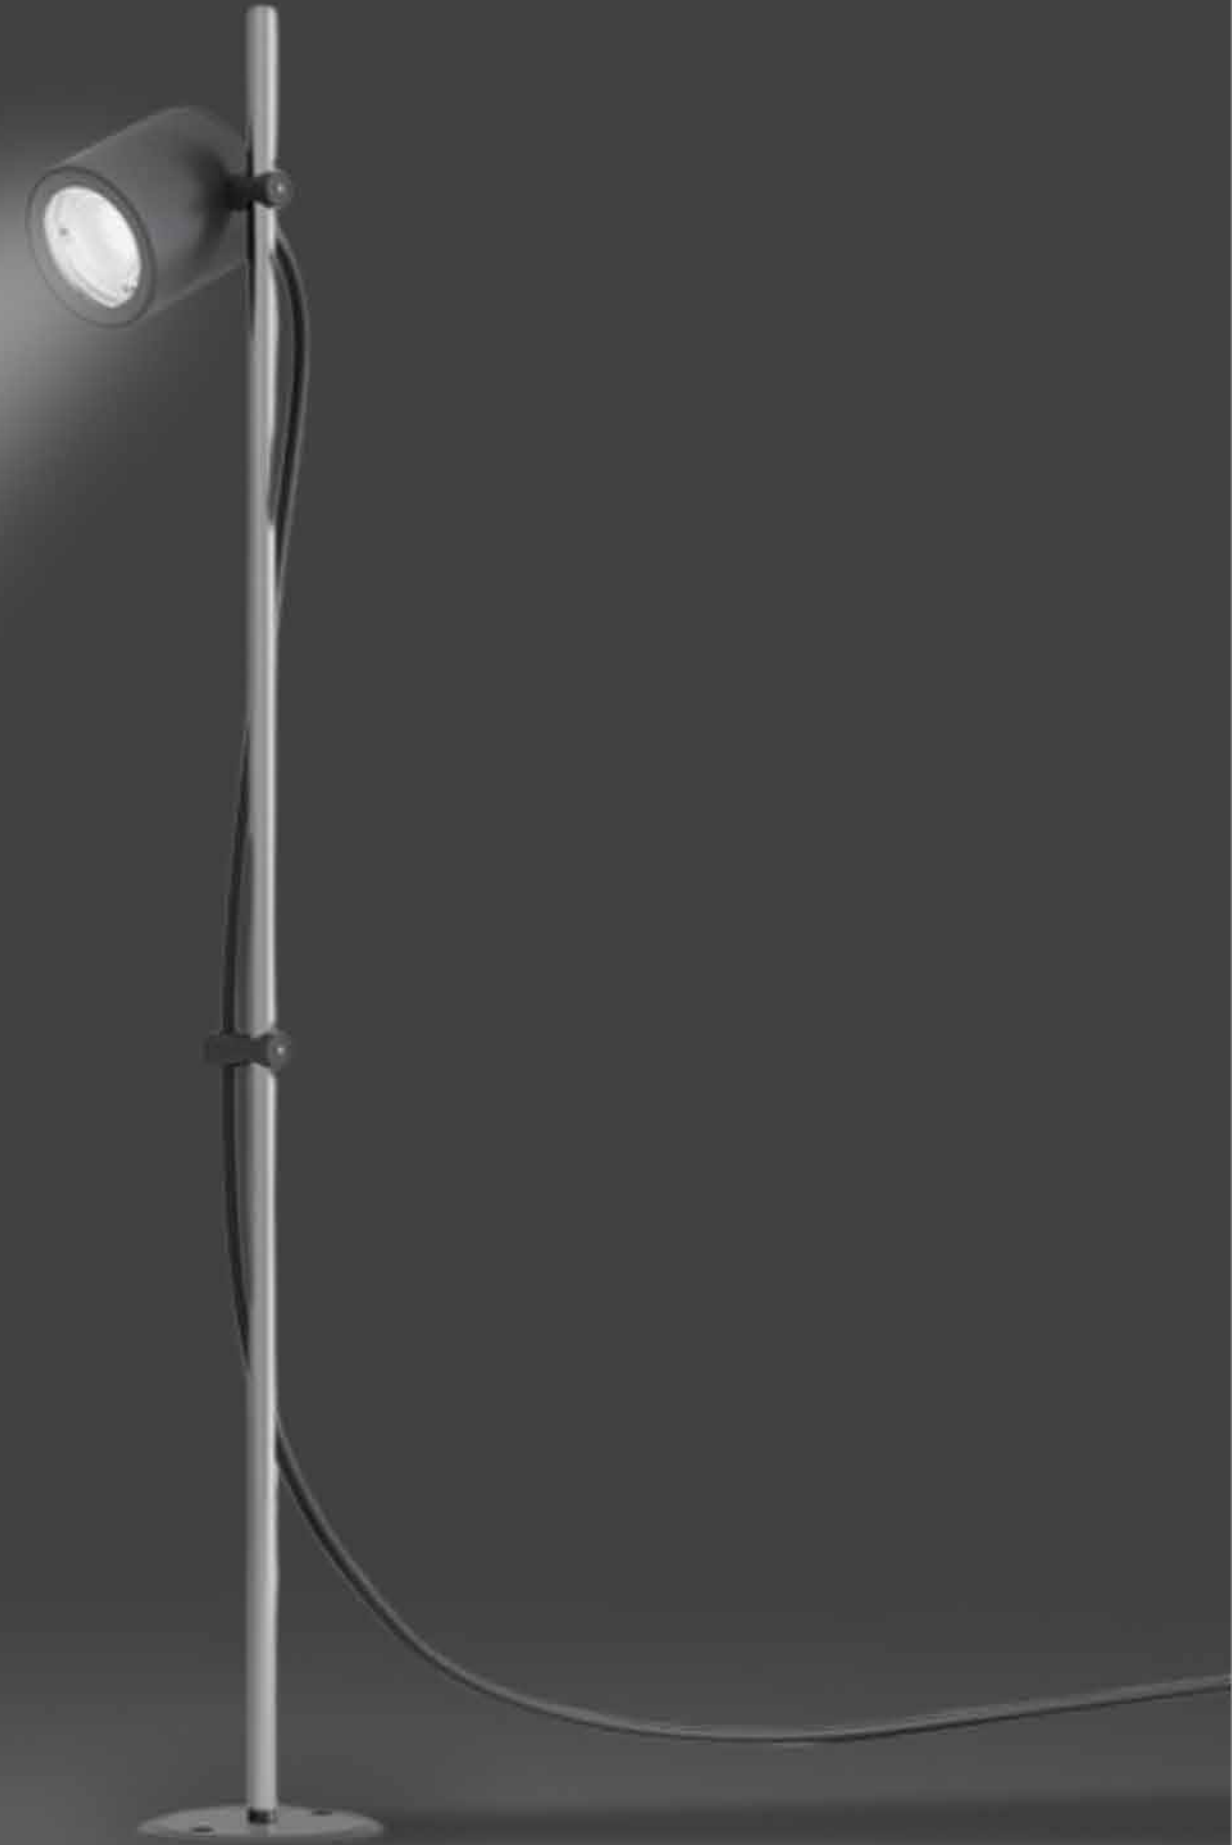

Ceiling recessed

RAIN IP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.0667.6.930.XX	6,3	3000	>90	700	516

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL GL

ⓘ » 497

Ceiling recessed



Color	Body
XX	
GR	GR
WH	WH




08.0667.6.930.WH



08.0667.6.930.GR

URBAN





Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.1141.4.930.XX	4	3000	>90	220-240	113

LED CE IP65 INCL Coating

MATERIAL | AL GL

» 497

URBAN



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.1143.4.930.XX	4	3000	>90	220-240	113


LED CE IP65 INCL Coating

MATERIAL | AL GL

» 497

Color
XX
GR GR

URBAN




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.1142.4.930.XX	4	3000	>90	220-240	113

LED CE IP65 INCL Coating

MATERIAL | AL GL

» 497

URBAN



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.1144.4.930.XX	4	3000	>90	220-240	113

LED CE IP65 INCL Coating


MATERIAL | AL GL

» 497

Color
XX
GR GR

Ceiling surface

BIM70 S




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.1112.8.930.XX.50	8,4	3000	>90	700	776

LED CE IP65 INCL 50° Coating

MATERIAL | AL GL

» 497

BARREL76 S



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.1111.9.930.XX.50	9	3000	>90	220-240	1200

LED CE IP65 INCL 50° Coating


MATERIAL | AL GL

» 497

Color	Body
XX	
GR	GR

Ceiling surface

KASK



Code	Power Watt	Color T (K)	CRI	*	Product Lumen
08.1100.7.000.XX	7	xxx	xxx	GU10	xxx

1 X LED BULB GU10 NOT INCLUDED

CE IP65 EXCL


MATERIAL | AL GL

» 497

Color	Body
XX	
GR	GR
WH	WH

Ceiling/Wall surface

BUBBLE




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.1109.10.930.XX	10	3000	>90	220-240	365



MATERIAL | AL GL

» 497

BUBBLE



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.2912.8.930.XX	7,8	3000	>90	700	282



MATERIAL | AL GL

» 497


Color	Body
XX	GR
GR	GR

Wall surface



Wall surface

GRAPH1




Code	Power Watt	Color T (K)	CRI	*	Product Lumen
08.2010.7.000.XX	7	xxx	xxx	GU10	xxx

ⓘ 1 X LED BULB GU10 NOT INCLUDED



MATERIAL | ⓘ » 497

GRAPH2



Code	Power Watt	Color T (K)	CRI	*	Product Lumen
08.2010.14.000.XX	2x7	xxx	xxx	GU10	xxx

ⓘ 2 X LED BULB GU10 NOT INCLUDED



MATERIAL | ⓘ » 497

Color	Body
XX	
GR	GR ■
WH	WH □




08.2010.7.000.WH




08.2010.14.000.WH

Wall surface

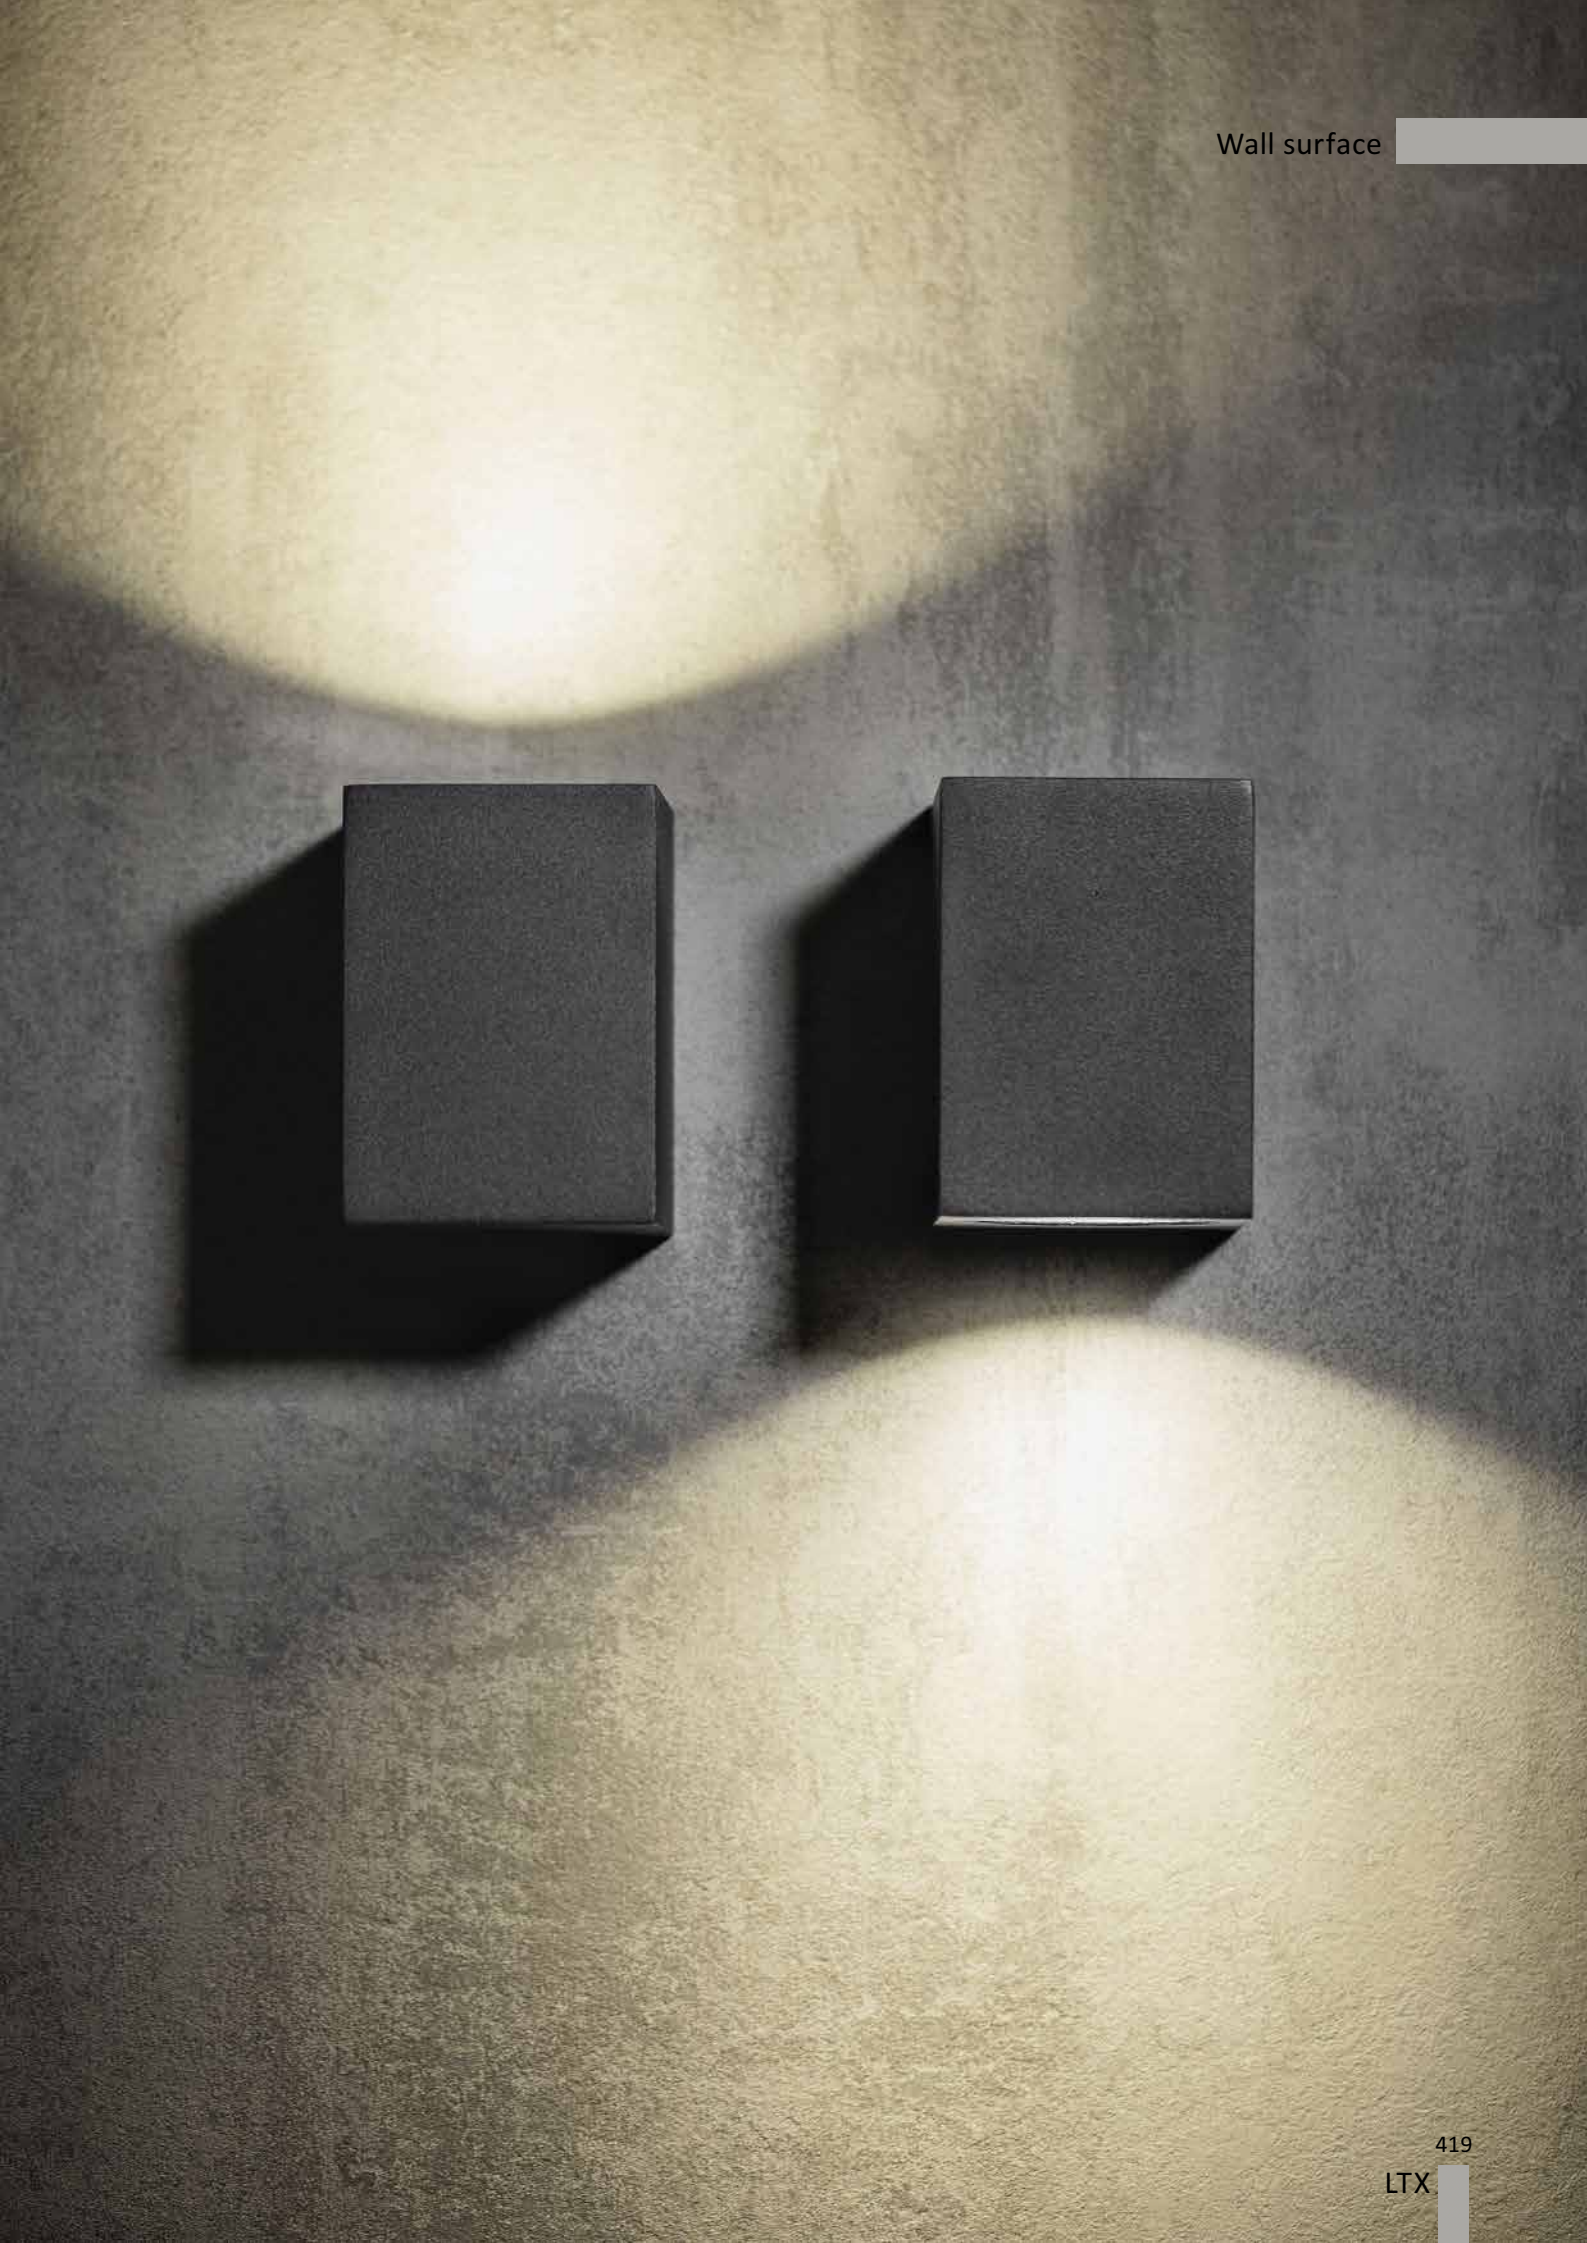

BRICK 1



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.2003.4.930.XX	4	3000	>90	350	314

LED


CE

IP65

MATERIAL | AL GL

» 497

BRICK 2



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.2003.8.930.XX	2 x 4	3000	>90	700	2 x 314

LED


CE

IP65


MATERIAL | AL GL

» 497

Color	Body
XX	
GR	
WH	



08.2003.4.930.WH





08.2003.8.930.WH



Ceiling surface

WIN IP




Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.1052.5.930.XX	4,5	3000	>90	500	198



MATERIAL |  AL  GL

 » 497

Color	Body
XX	
GR	GR 
WH	WH 




08.1052.5.930.WH

Wall surface



Wall surface

BUTTON IP



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.2051.18.927.XX	18	2700	>90	220-240	161

LED

CE

IP65

INCL

360°

Coating

MATERIAL |


AL

GL

i

 » 497

ON WALL



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.2036.14.930.XX	14	3000	>90	220-240	769

LED

CE

IP65

INCL

36°

Coating

MATERIAL |

AL

GL

i

 » 497

Color

XX

Body

GR

GR


Wall surface



ON WALL IP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.2020.13.930.XX	12,6	3000	>90	350	455




MATERIAL | AL GL » 497

BEVEL



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.2061.3.930.XX	3	3000	>90	220-240	137





MATERIAL | AL GL » 497

Color	Body
XX	
GR	GR



Wall recessed

IN WALL IP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.5240.R2.927.XX	2,1	2700	>90	700	21


DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL GL

» 497

IN WALL IP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.5240.S2.927.XX	2,1	2700	>90	700	21

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL GL

» 497

Color	Body
XX	
GR	GR
WH	WH



08.5240.R2.927.WH





08.5240.S2.927.WH

Wall recessed



Wall recessed

IN WALL IP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.5239.R2.927.XX	2,1	2700	>90	700	21


DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL GL

» 497

IN WALL IP



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.5239.S2.927.XX	2,1	2700	>90	700	21


DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL GL

» 497

Color	Body
XX	
GR	GR
WH	WH



08.5239.R2.927.WH




08.5239.S2.927.WH

Wall recessed




IN WALL DOT



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3854.R1.830.XX	1,4	3000	>80	24	42

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | INOX


» 497

Color	Body
XX	
SS	SS

HALO



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.3850.2.927.XX	2,1	2700	>90	350	27
08.3850.2.930.XX	2,1	3000	>90	350	27




MATERIAL | AL PL

» 497

Color	Body
XX	
GR	GR

VISOR50



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3011.8.930.XX.15	7,7	3000	>90	48	750
08.3011.8.930.XX.30	7,7	3000	>90	48	750
08.3011.8.930.XX.50	7,7	3000	>90	48	750

ⓘ DRIVER MUST BE PLACED ON REMOTE

ACCESSORIES


	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 38 mm H 182 mm	08.3011.ANCHOR



MATERIAL | AL GL

ⓘ » 497

VISOR72




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3012.11.930.XX.15	10,3	3000	>90	48	1423
08.3012.11.930.XX.30	10,3	3000	>90	48	1423
08.3012.11.930.XX.50	10,3	3000	>90	48	1423

ⓘ DRIVER MUST BE PLACED ON REMOTE

ACCESSORIES

	Tree belt	W 80 mm, H 60 mm, L 1800 mm	08.30.1112.BELT
	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 60 mm H 172 mm	08.3012.ANCHOR




MATERIAL | AL GL

ⓘ » 497

Color
XX
GR GR



VISOR55



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3013.7.930.XX.15	6,3	3000	>90	220-240	490
08.3013.7.930.XX.30	6,3	3000	>90	220-240	490
08.3013.7.930.XX.50	6,3	3000	>90	220-240	490

ACCESSORIES

	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 38 mm H 182 mm	08.3011.ANCHOR




MATERIAL | AL GL

» 497

Color	XX	Body
GR	GR	

VISOR85



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3014.13.930.XX.15	13	3000	>90	220-240	1020
08.3014.13.930.XX.30	13	3000	>90	220-240	1020
08.3014.13.930.XX.50	13	3000	>90	220-240	1020

ACCESSORIES

	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 38 mm H 182 mm	08.3011.ANCHOR




MATERIAL | AL GL

» 497


Color	XX	Body
GR	GR	

VISOR140



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3007.6.930.XX	6,3	3000	>90	220-240	205

Installation of the luminous flux limiter

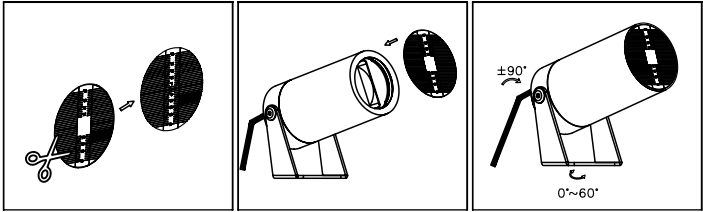


MATERIAL | AL GL

i » 497

ACCESSORIES

	Tree belt	W 80 mm, H 60 mm, L 1800 mm	08.30.1112.BELT
	Spike	D 40 mm, H 164 mm	08.3011.SPIKE
	Anchor system	D 60 mm H 172 mm	08.3012.ANCHOR

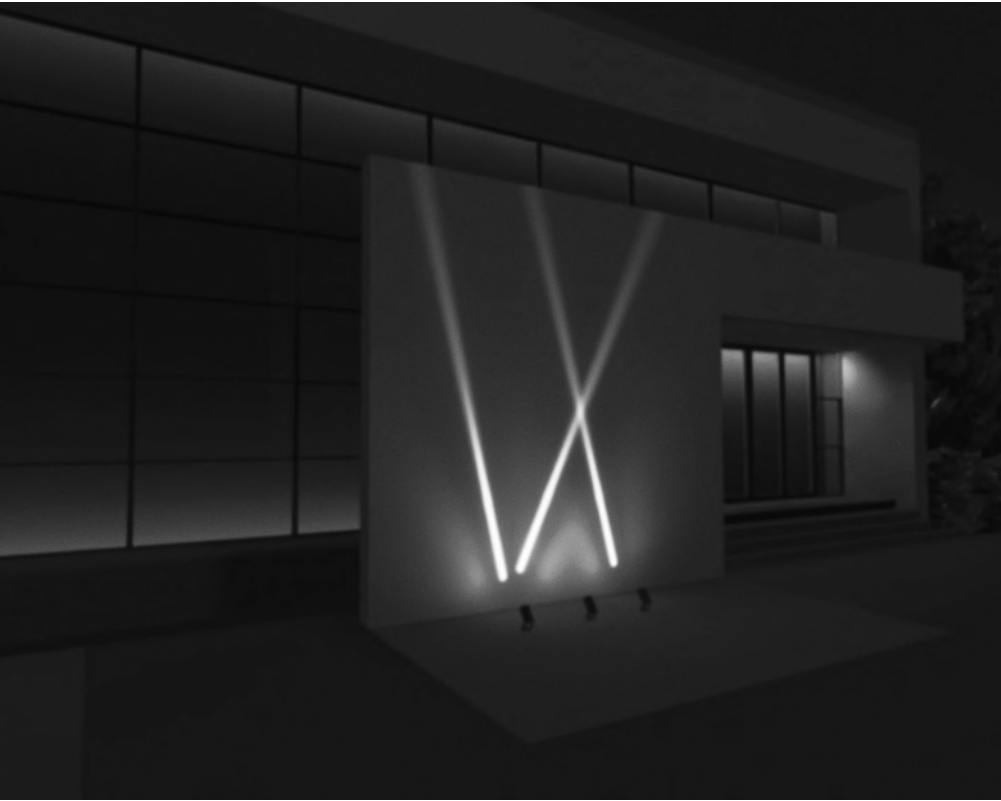


Color	Body
XX	
GR	GR



In ground

UPP28




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3840.R1.930.XX	0,5	3000	>90	48	2

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC » 497

UPP28



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.3844.R1.930.XX	0,5	3000	>90	48	2

DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL PC » 497

Color	XX	Body
SS	SS	

In ground

PATH LIGHT



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.4841.1.930.XX	1	3000	>90	48	9


DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL GL » 497

Color	XX	Body
GR	GR	


UPP50



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.4015.4.927.XX	4,2	2700	>90	350	192
08.4015.4.930.XX	4,2	3000	>90	350	192




DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL GL

» 497


UPP50 WW



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.4016.4.927.XX	4,2	2700	>90	350	192
08.4016.4.930.XX	4,2	3000	>90	350	192



DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL GL


» 497

Color	XX	Body
GR	GR	■


UPP77



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.4011.8.930.XX.30	7,7	3000	>90	48	750




DRIVER MUST BE PLACED ON REMOTE



MATERIAL | INOX GL

» 497


UPP77 WW



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.4012.6.930.XX.WW	6,2	3000	>90	48	503




DRIVER MUST BE PLACED ON REMOTE




MATERIAL | INOX GL

» 497

UPP 220V



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.4013.R6.930.XX.30	6,3	3000	>90	350	532




MATERIAL | INOX GL

» 497

Color	XX	Body
SS	SS	■

BARD1 68



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.5000.10.830.XX	10	3000	>90	220-240	600

LED

CE

IP65

INCL

360°

MATERIAL |

AL

PMMA

i » 497

Color

XX


Body

GR

GR



BARD2




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.5001.10.930.XX	10	3000	>90	220-240	752



MATERIAL | AL PMMA

i » 497

BARD4



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.5004.18.927.XX	18	2700	>90	220-240	617




MATERIAL | AL PMMA

i » 497

Color	XX	Body
GR	GR	■

BARD3




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.5003.13.927.XX	13	2700	>90	220-240	894



MATERIAL | AL PMMA

i » 497

BARD5



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.5005.18.927.XX	18	2700	>90	220-240	685




MATERIAL | AL PMMA

i » 497

Color	XX	Body
GR	GR	■

BARD6




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.5006.18.927.XX	18	2700	>90	220-240	877

LED CE IP65 INCL 360° Coating


MATERIAL | AL PMMA

» 497

Color
XX
GR GR

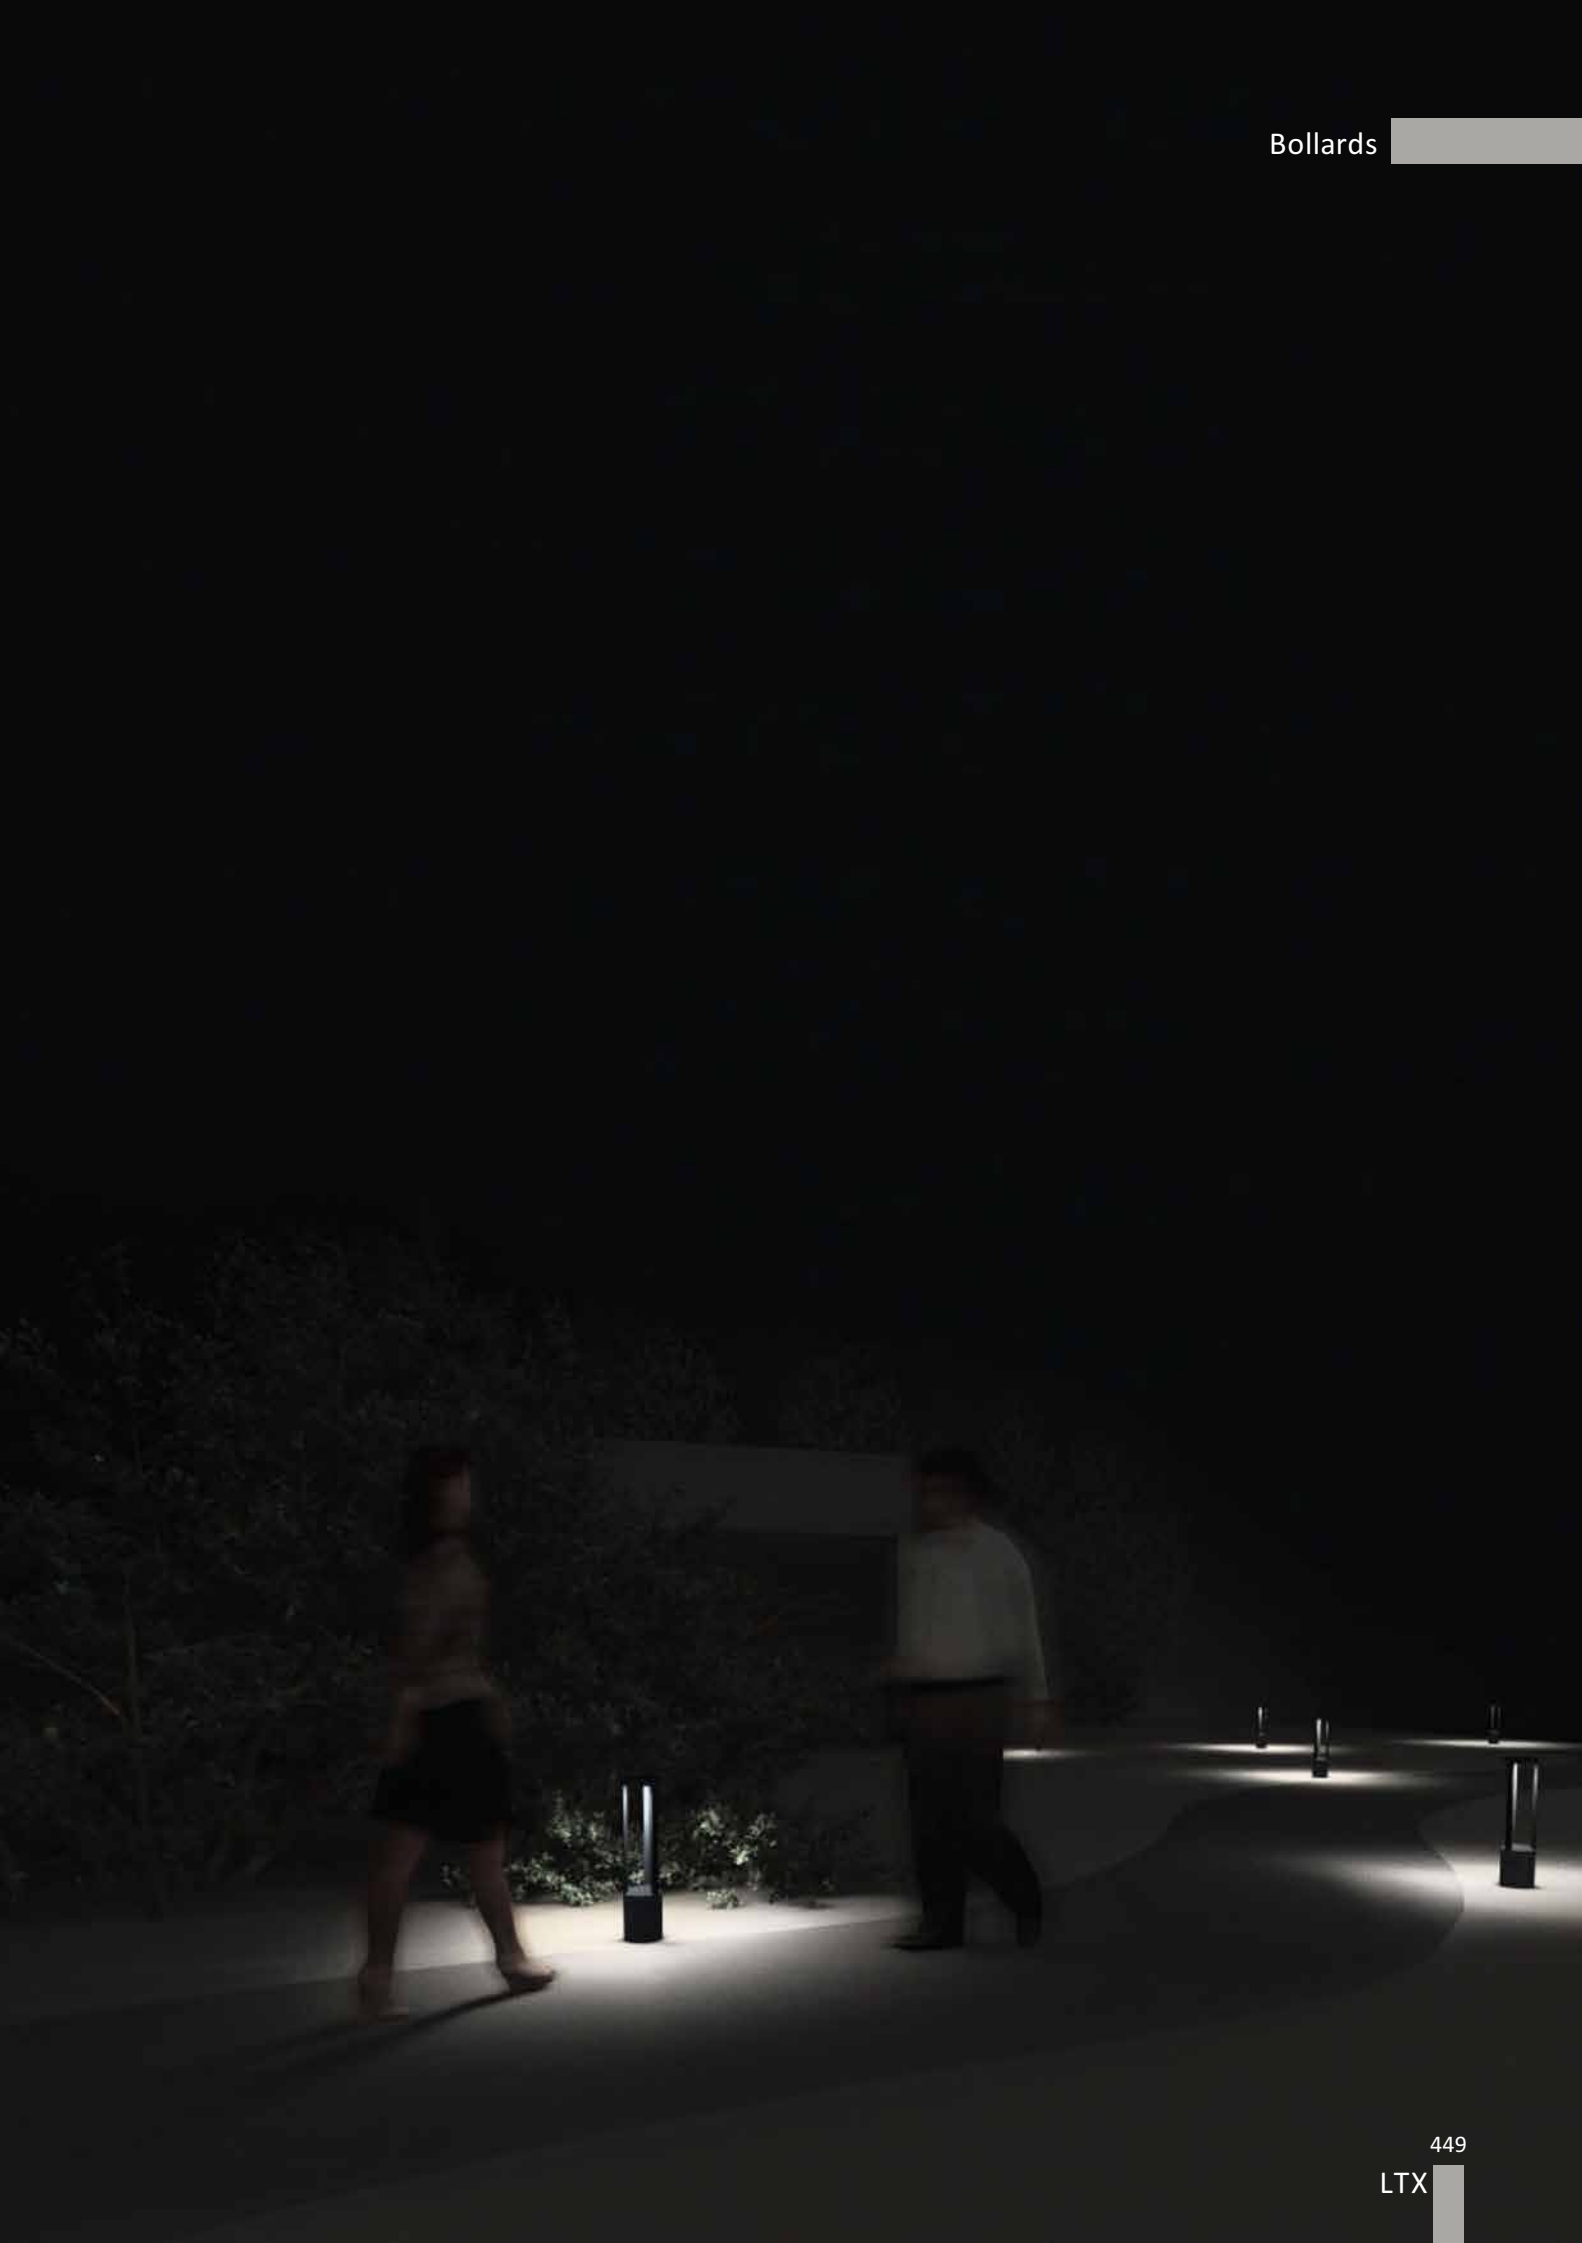

YARD 2




Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.6006.4.830.XX	4	3000	>90	48	160

ⓘ DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC ⓘ » 497

YARD 2



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.6012.8.830.XX	8	3000	>90	48	320

ⓘ DRIVER MUST BE PLACED ON REMOTE




MATERIAL | AL PC ⓘ » 497

Color	Body
XX	
GR	GR



YARD

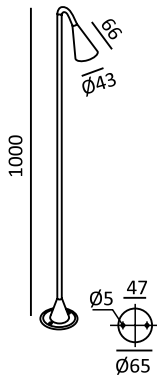

Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.6010.4.927.XX	3,6	2700	>90	24	248

 DRIVER MUST BE PLACED ON REMOTE




MATERIAL |  AL  PC

 » 497

Color	XX	Body
GR	GR	



YARD 1



Code	Power Watt	Color T (K)	CRI	mA	Product Lumen
08.6020.6.930.XX	6,3	3000	>90	350	478




MATERIAL | AL PC

i » 497

Color	Body
XX	GR ■



FIREFLY



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.6044.1.930.XX	0,5	3000	>90	24	9


DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

» 497

FIREFLY



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.6046.1.930.XX	0,5	3000	>90	24	9


DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC

» 497

FIREFLY



Code	Power Watt	Color T (K)	CRI	V	Product Lumen
08.6048.1.930.XX	0,5	3000	>90	24	9

DRIVER MUST BE PLACED ON REMOTE



MATERIAL | AL PC


» 497

Color	XX	Body
BK	BK	■






LED STRIP & PROFILE



Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.48.120.09.20.050.930	5000x10x1,6	48	120	9,6	830	>90	3000K
11.48.120.09.20.050.940	5000x10x1,6	48	120	9,6	840	>90	4000K



i » 497



Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.48.120.09.20.300.930	30000x10x1,6	48	120	9,6	830	>90	3000K
11.48.120.09.20.300.940	30000x10x1,6	48	120	9,6	840	>90	4000K



i » 497




11.48.120.09.20.050.830



11.48.120.09.20.050.840






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.S120.10.20.050.830	5000x8x1,5	24	120	9,6	960	>80	3000K
11.24.S120.10.20.050.840	5000x8x1,5	24	120	9,6	1040	>80	4000K



i » 497




Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.S120.10.65.050.830	5000x10x4,8	24	120	9,6	960	>80	3000K
11.24.S120.10.65.050.840	5000x10x4,8	24	120	9,6	1040	>80	4000K



i » 497






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.120.10.20.050.923	5000x12x1,5	24	120	9,6	760	>90	2300K



i » 497





Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.128.09.20.050.830	5000x8x1,5	24	128	9,6	1335	>80	3000K

LED

CE

IP20

EXCL

118°

5M/roll


-LEDs/cut

8/62,5 mm

R30

» 497








Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.192.19.20.040.930	4000x15x1,5	24	192	20,8	2250	>90	3000K
11.24.192.19.20.040.940	4000x15x1,5	24	192	20,8	2345	>90	4000K

LED CE IP20 EXCL 118° 4M/Roll 8/41,67 mm -LEDs/cut

» 497





Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.COF4.09.20.025.927	2500x4x1,6	24	COF	9	610	>90	2700K
11.24.COF4.09.20.025.930	2500x4x1,6	24	COF	9	680	>90	3000K
11.24.COF4.09.20.025.940	2500x4x1,6	24	COF	9	760	>90	4000K

LED

CE

IP20

EXCL

134°

2,5M/Roll

-LEDs/cut

16,67mm

R30

i

» 497

Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.COF8.09.20.050.930	5000x8x1,6	24	COF	9	640	>90	3000K
11.24.COF8.09.20.050.940	5000x8x1,6	24	COF	9	640	>90	4000K

LED

CE

IP20

EXCL

134°

5M/Roll

-LEDs/cut

50 mm

R30

i

» 497

Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	CRI	Color T(K)
11.24.COF8.09.67.050.930	5000x10x4,8	24	COF	9	640	>90	3000K
11.24.COF8.09.67.050.940	5000x10x4,8	24	COF	9	640	>90	4000K

LED

CE

IP67

EXCL

121°

5M/Roll

-LEDs/cut

50 mm

R30

i

» 497



11.24.COF4.09.20.025.927




11.24.COF4.09.20.025.930



11.24.COF4.09.20.025.940






Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.120.11.20.050.RGB	5000x8x1,5	24	120	11	430	RGB
					/	Red
					/	Green
					/	Blue




i » 497




Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.168.16.20.050.RGB	5000x10x1,5	24	168	17,3	534	RGB
					/	Red
					/	Green
					/	Blue



i » 497







Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.60.19.20.050.RGBW	5000x12x2,1	24	60	19,2	430	RGB
					/	Red
					/	Green
					/	Blue
					703	3000K



i » 497

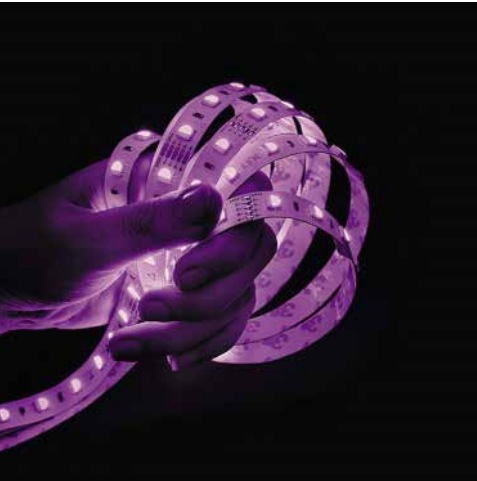




Code	Size (mm)	DC(V)	LEDs/m (pcs)	Max. W/m	LM/m	Color T(K)
11.24.140.17.20.050.927-960	5000x10x1,6	24	140	19,2	1710	2700-6000K



i » 497






Code	Size (mm)	DC(V)	Max. W/m	LM/m	CRI	Color T(K)
11.24.D18.14.65.050.930	5000xØ18	24	16	800	>90	3000K
11.24.D18.14.65.050.940	5000xØ18	24	16	800	>90	4000K



i » 497



Code	Size (mm)	DC(V)	Max. W/m	LM/m	CRI	Color T(K)
11.24.D25.14.65.050.930	5000xØ25	24	16	950	>90	3000K
11.24.D25.14.65.050.940	5000xØ25	24	16	950	>90	4000K





i » 497



Profile recessed

PROFILE COUNTUR



Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.4033.25	Profile x 1	2500x59x58	Aluminum	Silver
	Diffuser x 1	2500x34,2x10,2	Polycarbonate	Opal
	End cap x 2	46,1x26,4x1,5	Polycarbonate	Silver
12.4033.EC	End cap	46,1x26,4x1,5	Polycarbonate	Silver




» 497


Profile recessed



PROFILE CENTRAL 1




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2013.25	Profile x 1	2500x60x13	Aluminum	Silver
	Diffuser x 1	2500x16,7x7,8	Polycarbonate	Opal
	End cap x 2	20x20x4,5	Polycarbonate	Silver
12.2013.EC	End cap	20x20x4,5	Polycarbonate	Silver





» 497

PROFILE COUNTUR TRIM




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2409.25	Profile x 1	2500x23,8x8,8	Aluminum	Silver
	Diffuser x 1	2500x6,4x2,8	Polycarbonate	Opal
	End cap x 2	23,8x8,8x13,3	Polycarbonate	Silver
12.2409.EC	End cap	23,8x8,8x13,3	Polycarbonate	Silver





» 497

PROFILE CENTRAL 2




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.3524.25	Profile x 1	2500x85x24	Aluminum	Silver
	Diffuser x 1	2500x34,2x10,2	Polycarbonate	Opal
	End cap x 2	38,6x24x2	Polycarbonate	Silver
12.3524.EC	End cap	38,6x24x2	Polycarbonate	Silver





» 497

PROFILE MINI TRIM





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2513.25	Profile x 1	2500x25x13	Aluminum	Silver
	Diffuser x 1	2500x14,7x4,5	Polycarbonate	Opal
	End cap x 2	25x13x11	Polycarbonate	Silver
12.2513.EC	End cap	25x13x11	Polycarbonate	Silver



» 497

PROFILE IN





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1212.IN.25	Profile x 1	2500x45,4x25,1	Aluminum	Silver
	Diffuser x 1	2500x11x4,6	Polycarbonate	Opal
	End cap x 2	12,5x13,3x6,7	Polycarbonate	Silver
12.1212.IN.EC	End cap	12,5x13,3x6,7	Polycarbonate	Silver



i » 497

PROFILE OUT




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1212.OUT.25	Profile x 1	2500x50x22,3	Aluminum	Silver
	Diffuser x 1	2500x11x4,6	Polycarbonate	Opal
	End cap x 2	22,1x15x7	Polycarbonate	Silver
12.1212.OUT.EC	End cap	22,1x15x7	Polycarbonate	Silver




i » 497

PROFILE W&T IN




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1417.WT.IN.25	Profile	2500x43x43	Aluminum	Silver
12.1417.WT.IN.DIF	Diffuser	1000x14x3	Polycarbonate	Opal
12.1417.WT.IN.EC	End cap	15,2x12,2x7	Polycarbonate	Silver




CE IP20 instr. Symmetrical 10 mm >80% Panel for walls

i » 497

PROFILE IN SURF




Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1616.25	Profile x 1	2500x16x16	Aluminum	Silver
	Diffuser x 1	2500x19,4x6	Polycarbonate	Opal
	End cap x 2	16x16x6,5	Polycarbonate	Silver
12.1616.EC	End cap	16x16x6,5	Polycarbonate	Silver




CE IP20 instr. Symmetrical 8 mm >70%

i » 497

PROFILE W&T OUT





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2510.WT.OUT.25	Profile x 1	2500x36x36	Aluminum	Silver
	Diffuser x 1	2500x18,9x6,5	Polycarbonate	Opal
	End cap x 2	22,6x13,34x7	Polycarbonate	Silver
12.2510.WT.OUT.EC	End cap	22,6x13,34x7	Polycarbonate	Silver



CE IP20 instr. Symmetrical 8 mm >70% Panel for walls

i » 497

PROFILE FLOOR IN





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2127.25	Profile x 1	2500x21,3x26,1	Aluminum	Silver
	Diffuser x 1	2500x19x5	Polycarbonate	Opal
	End cap x 2	25,8x21,4x6	Polycarbonate	Silver
12.2127.EC	End cap	25,8x21,4x6	Polycarbonate	Silver

CE  IP20  Instr.  Symmetrical  8 mm  >75%

 » 497

PROFILE FLOOR





Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.1032.25	Profile x 1	2500x31,7x99,5	Aluminum	Silver
	Diffuser x 1	2500x13,7x8,5	Polycarbonate	Opal

CE  IP20  Instr.  Wall-washing  8 mm  >80%

 » 497

PROFILE FLOOR IN



Code	Components (pcs)	Dimensions (mm): LxWxH	Material	Color
12.2711.25	Profile x 1	2500x27,1x11	Aluminum	Silver
	Diffuser x 1	2500x11x10	Polycarbonate	Opal
	End cap x 2	27x11x10	Polycarbonate	Silver
12.2711.EC	End cap	27x11x10	Polycarbonate	Silver

CE  IP20  Instr.  Symmetrical  8 mm  >75%


 » 497



SHIELD FOR TUB M



	Code	Color
Replaceable shield	06.A05SH.BR	Brass
	06.A05SH.CP	Copper




CE  IP20 MATERIAL |  AL

SHIELD L FOR TUB M




	Code	Color
Replaceable shield L	06.A05SHL.BR	Brass
	06.A05SHL.CP	Copper




CE  IP20 MATERIAL |  AL

WALL WASHER FOR TUB M




Code	
Replaceable wall washer, black color	06.A05WW
CE  IP20 MATERIAL  PC	

SNOOT FOR TUB M




Code	
Replaceable snoot, black color	06.A05NB
CE  IP20 MATERIAL  PC	

FOGGY COWER FOR TUB M




Code	
Replaceable foggy cover, mat white color	06.A05FG
CE  IP20 MATERIAL  GL	

DIFFUSER FOGGY FOR TUB M




Code	
Replaceable foggy diffuser	06.A05SFT
CE  IP20 MATERIAL  PC	

DIFFUSER LINE FOR TUB M




Code	
Replaceable line diffuser	06.A05ELPS
CE  IP20 MATERIAL  PC	

HONEYCOMB FOR TUB




	Model	Size	Code
Replaceable honeycomb, black color	TUB S	23 mm	06.A03HC
	TUB M	43 mm	06.A05HC
	TUB L	62 mm	06.A07HC
CE  IP20 MATERIAL  AL			


LENS



Code			
Series TUB S		Lens 24°	06.A03LS24
Series TUB M		Lens 15°	06.A05LS15
		Lens 30°	06.A05LS30
Series NANO		Lens 12°	01.A39LS12
		Lens 30°	01.A39LS30
Series SOL		Lens 12°	06.A09LS12
CE  IP20 MATERIAL  PC			


RING FOR SOL MINI

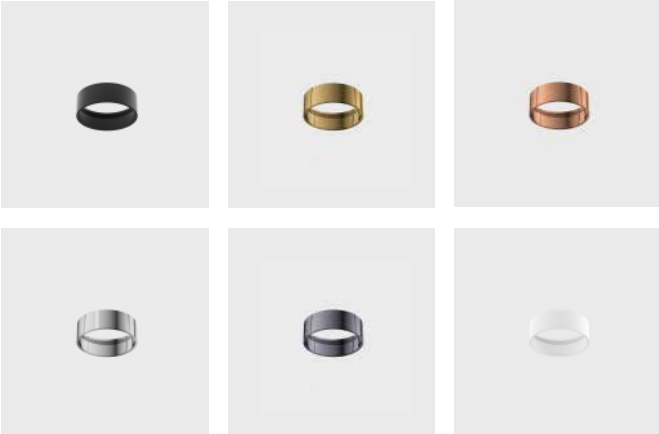


	Color	Code
Replaceable ring series SOL MINI 	Black	SOL M RING BLACK
	Brass	SOL M RING BRASS
	Copper	SOL M RING COPPER
	Chrome	SOL M RING CHROME
	Diamond black	SOL M RING DIAMOND BLACK
	White	SOL M RING WHITE
CE  IP20 MATERIAL  AL		

RING FOR SOL MINI



	Color	Code
Replaceable ring series SOL MINI 	Black	M RING GRAIN BLACK
	Brass	M RING GRAIN BRASS
	Bronze	M RING GRAIN BRONZE
	Coffee	M RING GRAIN COFFEE
	Copper	M RING GRAIN COPPER
	Chrome	M RING GRAIN CHROME
	Diamond black	M RING GRAIN DIAMOND BLACK
	Sahara beige	M RING GRAIN SAHARA BEIGE
	White	M RING GRAIN WHITE
CE  IP20 MATERIAL  AL		


RING FOR SOL

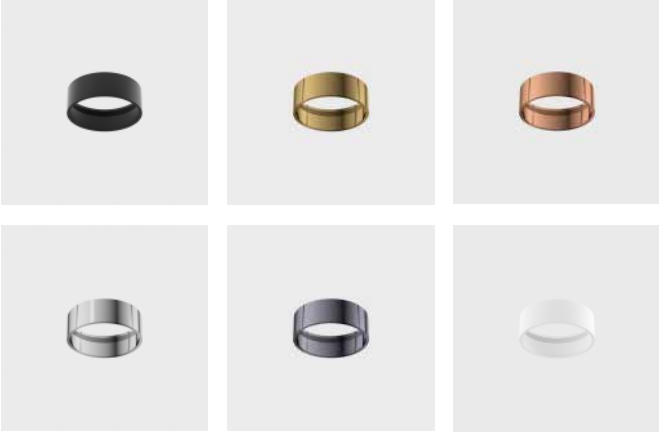

	Color	Code
Replaceable ring series SOL 	Black	SOL RING BLACK
	Brass	SOL RING BRASS
	Copper	SOL RING COPPER
	Chrome	SOL RING CHROME
	Diamond black	SOL RING DIAMOND BLACK
	White	SOL RING WHITE
CE  IP20 MATERIAL  AL		

RING FOR SOL



	Color	Code
Replaceable ring series SOL MINI 	Black	RING GRAIN BLACK
	Brass	RING GRAIN BRASS
	Bronze	RING GRAIN BRONZE
	Coffee	RING GRAIN COFFEE
	Copper	RING GRAIN COPPER
	Chrome	RING GRAIN CHROME
	Diamond black	RING GRAIN DIAMOND BLACK
	Sahara beige	RING GRAIN SAHARA BEIGE
	White	RING GRAIN WHITE
CE  IP20 MATERIAL  AL		

COLORS



BK | BLACK




CF | COFFEE



LB | LIKE BRASS



BR | BRASS



DB | DIAMOND
BLACK



LG | LIKE GOLD




BZ | BRONZE




MN | MIDNIGHT




SS | STAINLESS
STEEL




CP | COPPER




SB | SAHARA
BEIGE



CR | CHROME



WH | WHITE



CG | CHAMPAGNE
GOLD



GR | GRAPHITE

- Adapter - Electrical unit for connecting luminaire to track.
Body - External housing of the luminaire.
Shield - The internal decorative color part of the luminary that reduces glare.
Ring - Interchangeable decorative ring for SOL and SOL MINI series.
Frame - Replaceable decorative frame for recessed luminaires.

SYMBOLS GLOSSARY

NOTE CONCERNING THE VALUES INDICATED IN THIS CATALOGUE

The power (W) and luminous flux (Lm) values indicated in this catalogue correspond to the luminaire.

LUMEN

The lumen (lm) is the unit that measures the luminous flux, a measurement of the luminous output emitted by the source. The luminous flux is the measurement of total luminous output emitted by a lamp and that is perceived by the human eye.

CRI

A color rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an ideal or natural light source.

COLOR TEMPERATURE

The color temperature from a light Source is measured in degrees Kelvin (K). Color temperatures over 5000K are known as cold colors (blue-white) while temperatures between 2700 and 3000K are considered as warm colors.

IP CODE

Coding system that indicates the levels of protection achieved by means of a coating against access to hazardous parts, intrusion of solid foreign bodies and water ingress. The IP code is composed of two digits located immediately after the letters “IP”, and whose meaning is explained in the table below:

- | | |
|------|---|
| IP20 | Protected against the ingress of solid bodies greater than Ø 12 mm.
No protection against the ingress of moisture |
| IP33 | Protected against the ingress of solid bodies greatest than Ø2,5mm.
Protected against sprays of water |
| IP40 | Protected against the ingress of solid bodies greater than Ø 1 mm.
No protection against the ingress of moisture |
| IP43 | Protected against the ingress of solid bodies greater than Ø 1 mm.
Protected against rain |
| IP44 | Protected against the ingress of solid bodies greater than Ø 1 mm.
Protected against splashing water |
| IP65 | Protected against the ingress of dust
Protected against jets of water |
| IP66 | Protected against the ingress of dust
Protected from powerful jets of water |
| IP67 | Protected against the ingress of dust
Protected against immersion in water for limited periods |
| IP68 | Protected against the ingress of dust
Protected against total immersion in water for an indefinite period
(depth shown in meters) |

SYMBOLS GLOSSARY

	Class I Fitting whose protection against electric shock is based on earth wiring
	Class II Fitting whose protection against electric shock is based on reinforced double insulation
	Class III Fitting whose protection against electric shock is based on a safety extra low voltage supply SELV, in which voltages higher than those of SELV are not generated
	Suitable for installation on normally flammable surfaces
	Product in conformity with the requirements of relevant European Safety standards
	Product in conformity with the requirements of relevant Ukrainian standards

SYMBOLS GLOSSARY

	LED lamp		Fitting hole for recessed luminaires in mm
	Electronic control gear included		Recommended height
	Control gear not included		Tilting angle
	Made of		Minimum bend radius
	Diffuser		Length of roll
AL	Aluminum		LEDs/cut Cutting length
PC	Polycarbonate		RGB color change
INOX	Stainless steel		Tunable white color change
PMMA	Polymethyl methacrylate		Light distribution: wall-washing
GL	Glass		Recommended tape width
48V	Power supply voltage 48V		Light transmission of diffuser
42V	Power supply voltage 42V		Installation in wooden panels
24V	Power supply voltage 24V		Installed before facing
STEEL	Low profile metal casing		Suitable for use in coastal or marine environments.

Lightonix sp. z o.o
Ul. Hoza, 86 lok. 410
00-682 Warszawa
Poland
Tel.: +48 516 808 834
e-mail: info@ltx-led.com
www.ltx-led.com

