
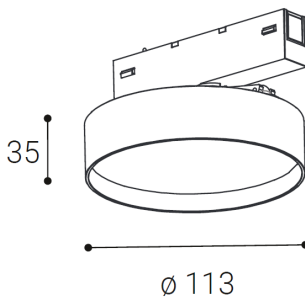


OLLI, B

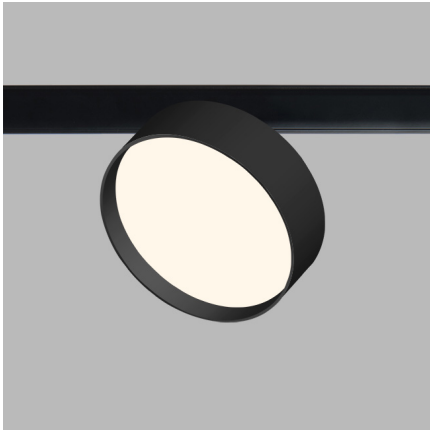

Name	OLLI, B
Code	6301133
Color	BLACK
Category	PROFI
Power	12W ± 10 %
Lumen output	1000lm ± 10 %
Color temperature	3000K
Efficacy	84lm/W
Driver	300 mA
Electrical insulation class	
Voltage/frequency	220-240V/50-60Hz

Color Rendering Index	80+
SDCM	< 3
Light beam angle	100°
Unified Glare Rating	N/A
Light source	LED
Dimmable	N/A
LED Lifetime	L80B20 50.000h 25°C
Warranty	5 YEAR

Ingress Protection	IP 20
Material	ALUMINIUM/PC

EN

Compact diffused luminaire designed for mounting in 3-circuit rails. Available in white and black. Use: thanks to the variability of the luminaire, it is especially suitable for diffuse lighting of spaces (shops, libraries, galleries, shops)

CZ

Kompaktní difúzní svítidlo určené pro montáž do 3-okružových lišt. Dostupné v bílé a černé barvě. Použití: díky variabilitě svítidla je vhodné zejména na difúzní osvětlení prostor (obchody, knihovny, galerie, prodejny)

Product

OLLI, B

6301133

BLACK

PROFI

Power

12W ± 10 %

1000lm ± 10 %

3000K

84lm/W

300 mA



220-240V/50-60Hz

Information

80+

< 3

100°

N/A

LED

N/A

L80B20 50.000h 25°C

5 YEAR

Other data

IP 20

ALUMINIUM/PC

DE

Kompakte diffuse Leuchte für die Montage in 3-Phasen-Schienen. Erhältlich in weiß und schwarz. Verwendung: dank der Variabilität der Leuchte besonders geeignet für die diffuse Beleuchtung von Räumen (Geschäfte, Bibliotheken, Galerien, Shops)

SK

Kompaktné difúzne svietidlo určené pre montáž do 3-okružových lišt. Dostupné v bielej a čiernej farbe. Použitie: vďaka variabilite svietidla je vhodné najmä na difúzne osvetlenie priestorov (obchody, knižnice, galérie, predajne)